



Introducing NOAA's Microwave Integrated Retrieval System (MIRS)

S-A. Boukabara, F. Weng, R. Ferraro, L. Zhao, Q. Liu, B. Yan, A. Li, W. Chen, N. Sun, H. Meng, T. Kleespies, C. Kongoli, Y. Han, P. Van Delst, J. Zhao and C. Dean

NOAA/NESDIS
Camp Springs, Maryland, USA



Contents



Overview



Algorithm Scientific Basis



Performance Evaluation



Summary & Online Access



Overview



Stated Goals of MIRS

- ❖ Algorithm for sounding, imaging, or combination thereof
- ❖ Applicable to all Microwave Sensors
- ❖ Extend over non-oceanic surfaces & in all-weather conditions
- ❖ Operate independently from NWP model forecasts

Benefits

- ❖ Reduction of Time/Cost to Adapt to New Sensors
- ❖ Reduction of Time/Cost to Transition to Operations
- ❖ Improvements in Severe Weather Forecasts
- ❖ Better Climate Data Records

MIRS Concept

Variational Retrieval (1DVAR)

CRTM as forward operator, validity-> clear, cloudy and precip conditions

Emissivity spectrum is part of the retrieved state vector

Algorithm valid in **all-weather conditions**, over **all-surface types**

Cloud & Precip profiles retrieval (no cloud top, thickness, etc)

EOF decomposition

Sensor-independent

Highly Modular Design

Flexibility and **Robustness**

Selection of Channels to use, parameters to retrieve

Modeling & Instrumental Errors are input to algorithm



Contents



Overview



Algorithm Scientific Basis



Performance Evaluation



Summary & Online Access

Cost Function Minimization

❖ Cost Function to Minimize:

$$J(X) = \left[\frac{1}{2} (X - X_0)^T \times B^{-1} \times (X - X_0) \right] +$$

Jacobians & Radiance Simulation from Forward Operator: CRTM

- ❖ To find the optimal solution, solve for: $\frac{\partial J(X)}{\partial X} = J'(X) = 0$
- ❖ Assuming Linearity $y(x) = y(x_0) + K[x - x_0]$
- ❖ This leads to iterative solution:

$$\Delta X_{n+1} = \left\{ \left(B^{-1} + K_n^T E^{-1} K_n \right)^{-1} K_n^T E^{-1} \right\} \left[\left(Y^m - Y(X_n) \right) + K_n \Delta X_n \right]$$

$$\Delta X_{n+1} = \left\{ B K_n^T \left(K_n B K_n^T + E \right)^{-1} \right\} \left[\left(Y^m - Y(X_n) \right) + K_n \Delta X_n \right]$$



More efficient
(1 inversion)

Preferred when $nChan \ll nParams$ (MW)

❖ Convergence Metric: χ^2

❖ Uncertainty matrix S :

$$S = B - B \times K^T \left(K \times B \times K^T + E \right)^{-1} \times K \times B$$

❖ Contribution Functions D : *indicate amount of noise amplification happening for each parameter.*


$$D = B \times K^T \left(K \times B \times K^T + E \right)^{-1} \times \left(Y(X) - K \times X_0 \right)$$

❖ Average kernel A : $A = D \times K$

- If close to zero, retrieval coming essentially from background
- If close to unity, retrieval coming from radiances: No artifacts from background




System Design & Architecture

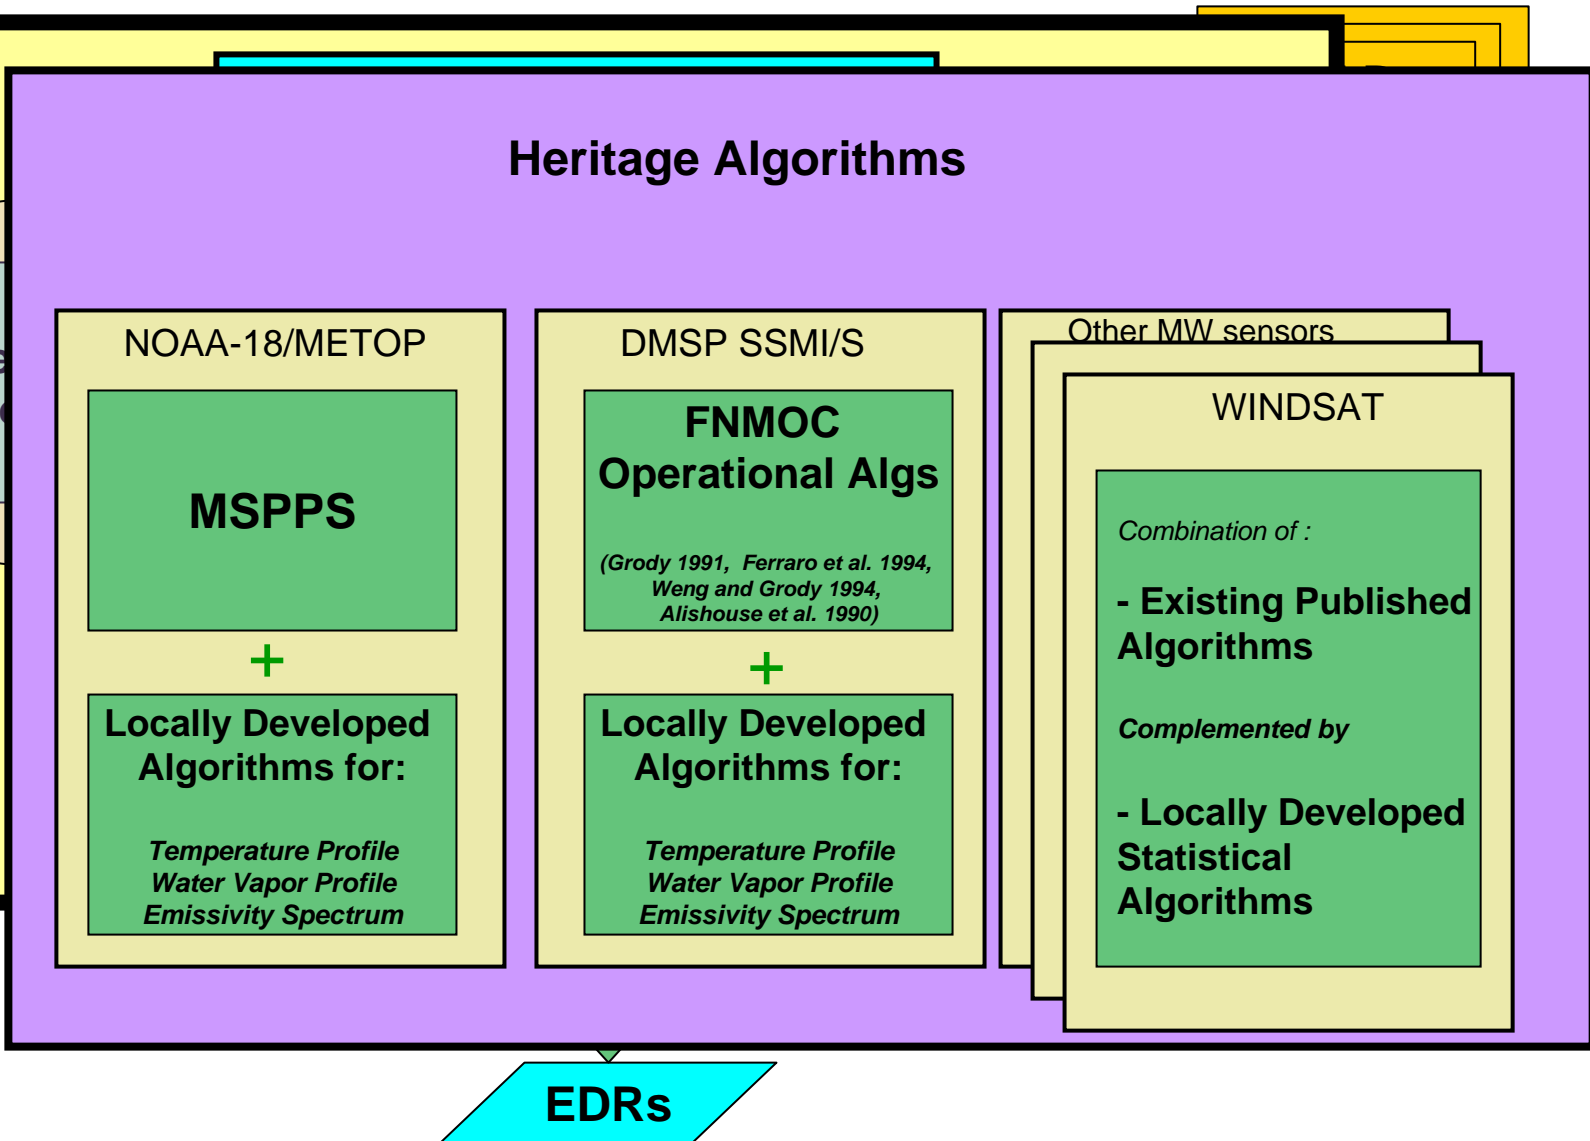



System Design & Architecture

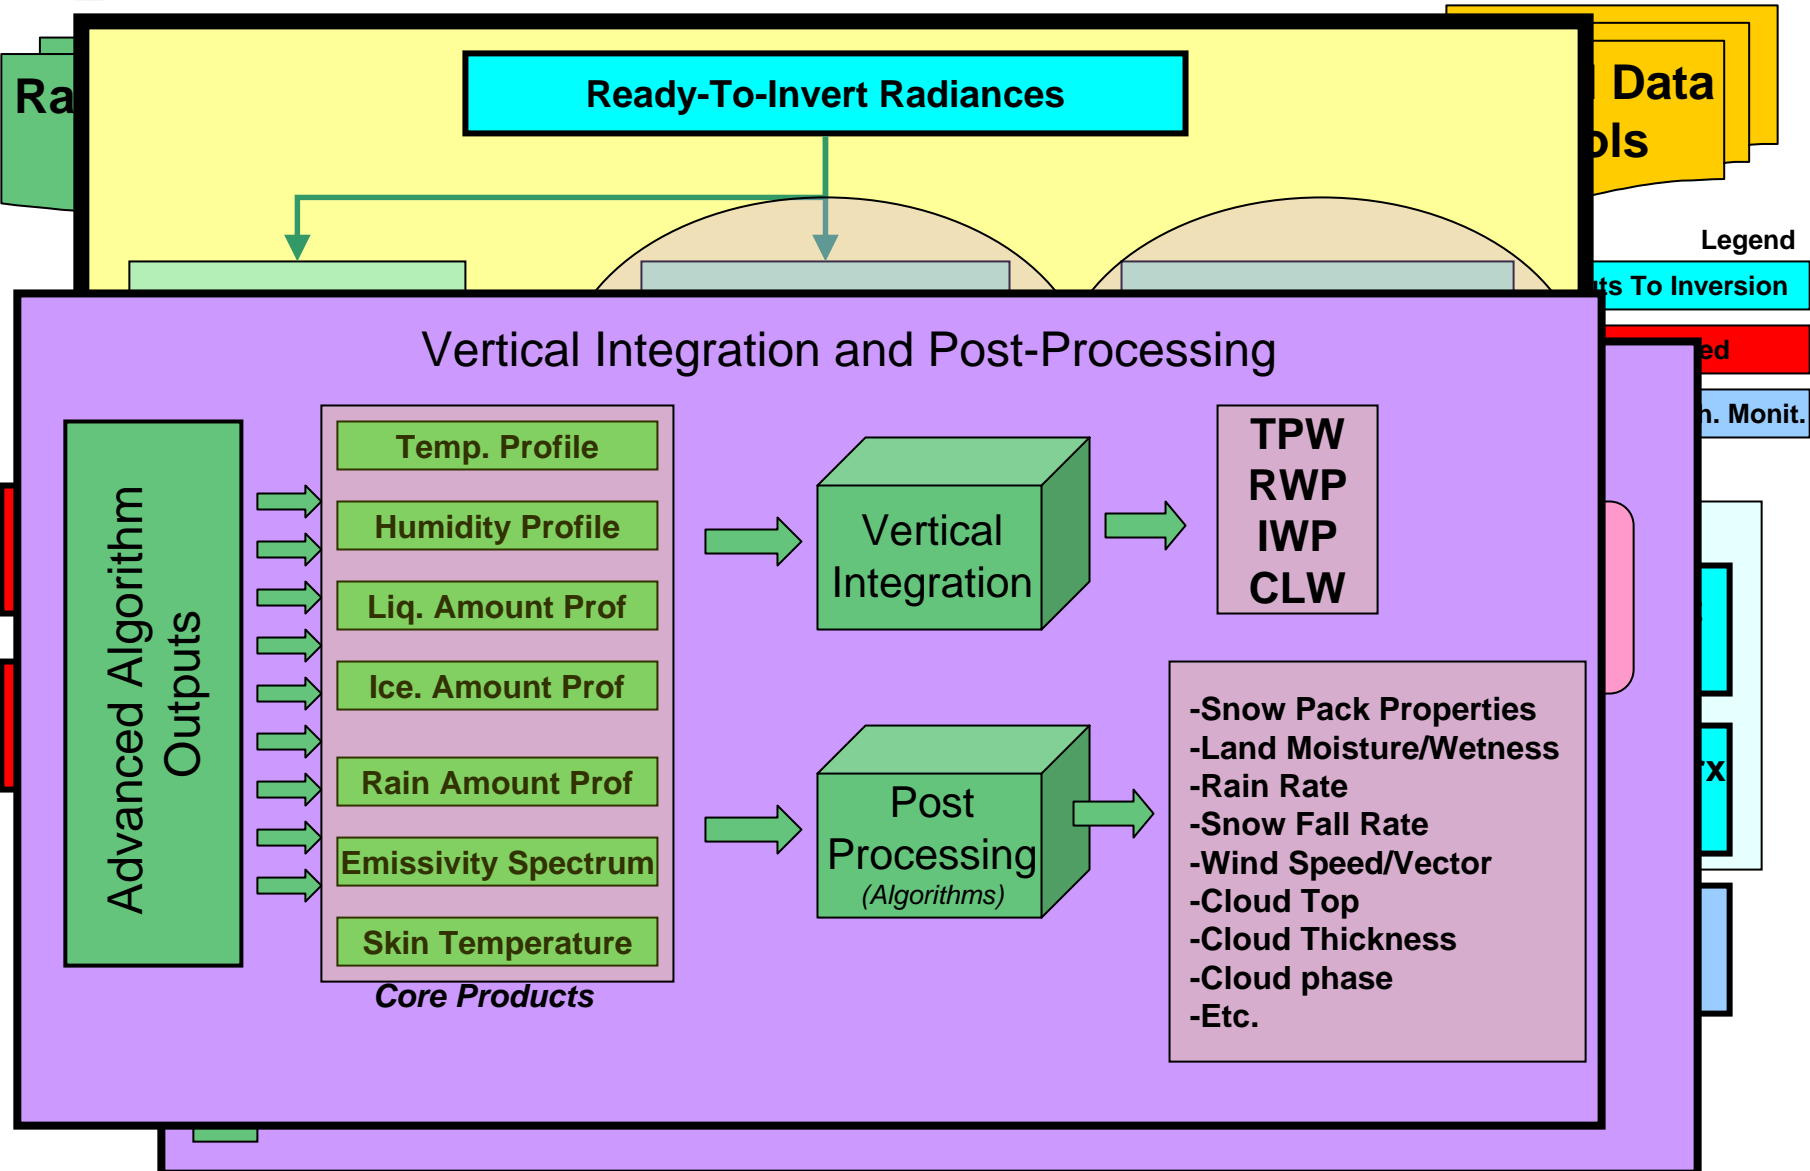



Contents



Overview




Algorithm Scientific Basis



Performance Evaluation




Summary & Online Access

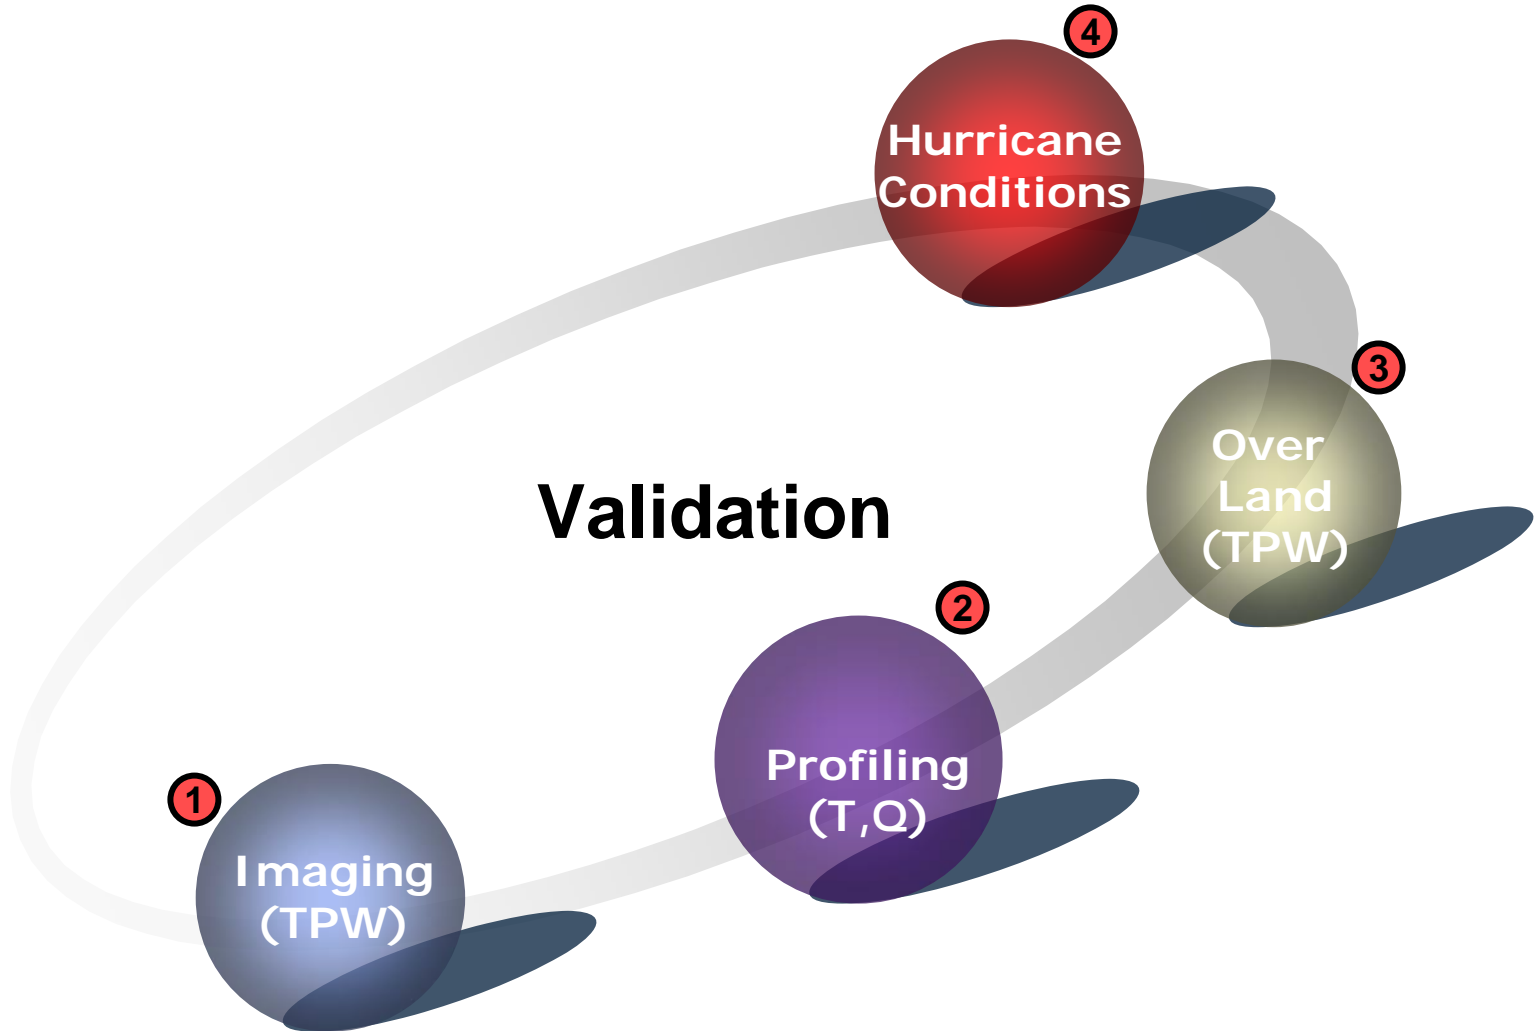



QC of the Validation Set

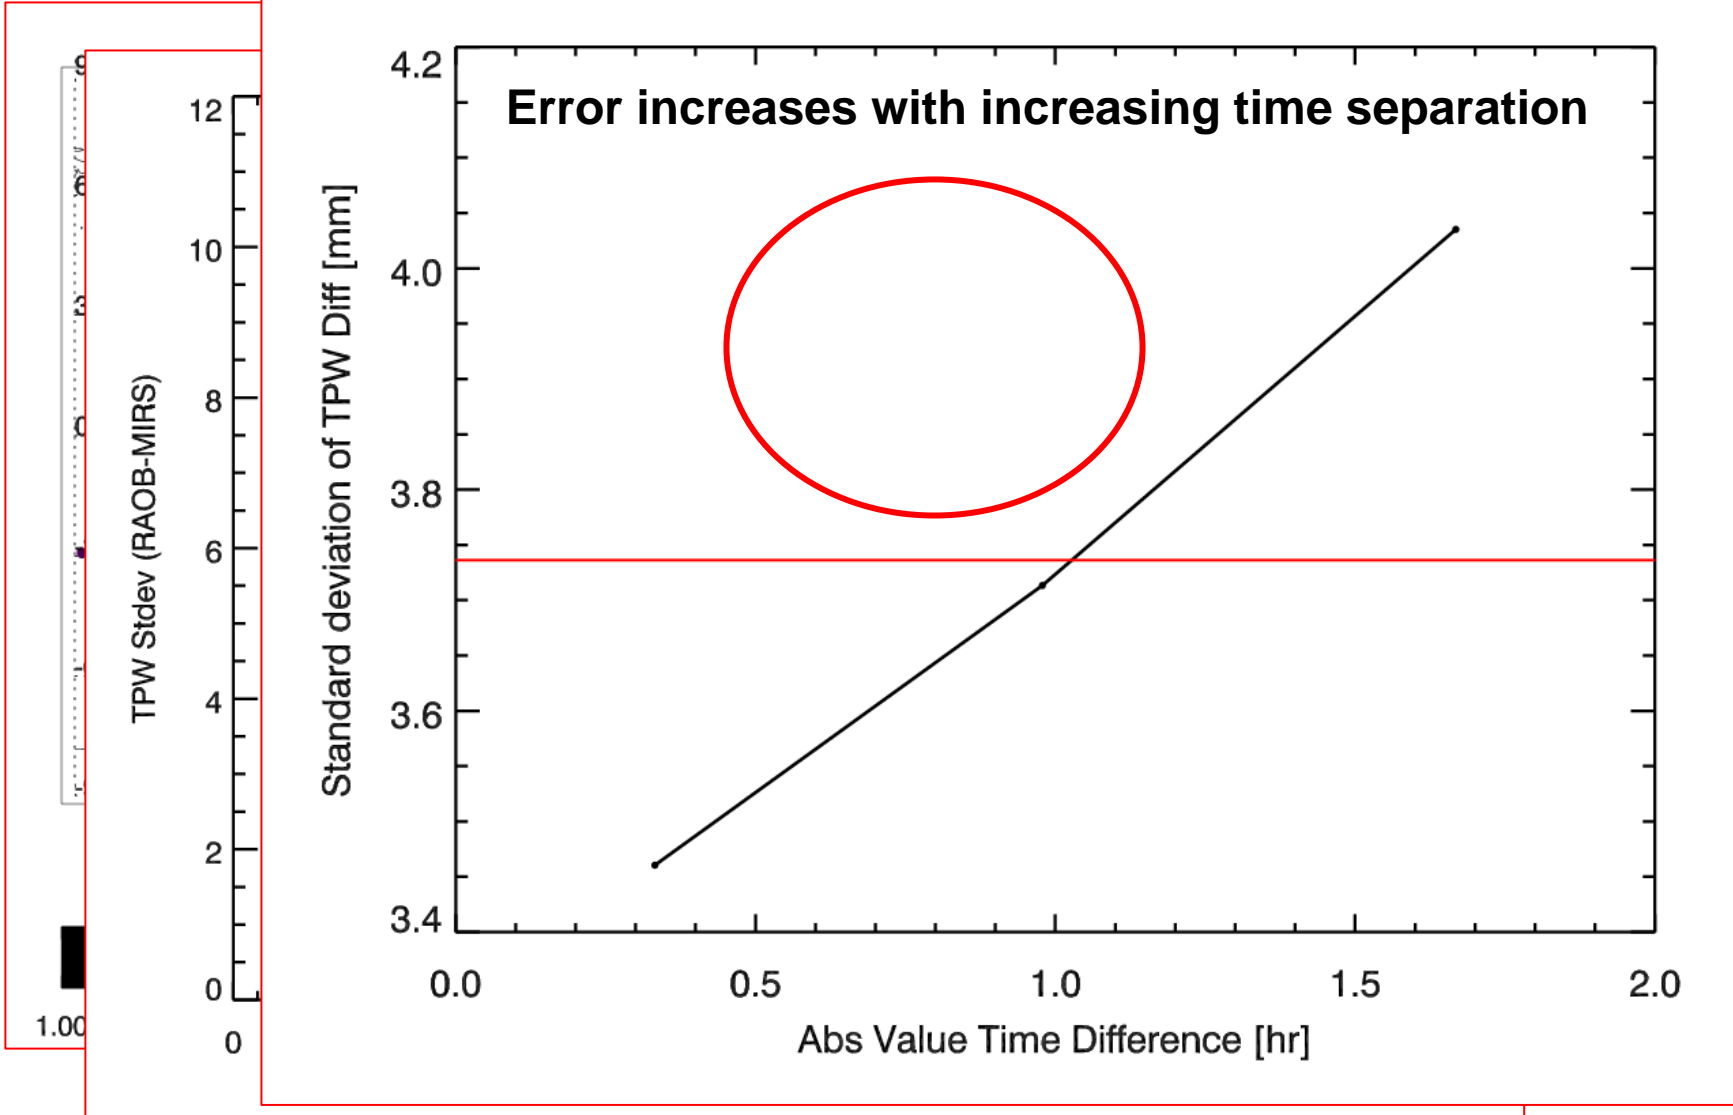



Improvement Assessment (*wrt Heritage*)




MSPPS: NOAA's operational system responsible for deriving microwave products


	MSPPS (bias)	MIRS (Bias)	MSPPS (Std)	MIRS (Std)	Improvement (%)
N15	1.87	0.49	4.57	3.85	16%
N16	1.31	-1.10	4.22	3.85	9%
N17	2.51	-0.2	4.26	3.30	23%

- ❖ Average TPW Standard Deviation Improvement is 16% over ocean
- ❖ Better scan angle handling
- ❖ Independence from NWP forecast outputs
- ❖ Capability extended over land


- ❖ Temperature & Humidity profiles using N15,16,17,18
- ❖ Comparison with radiosondes (statistical)

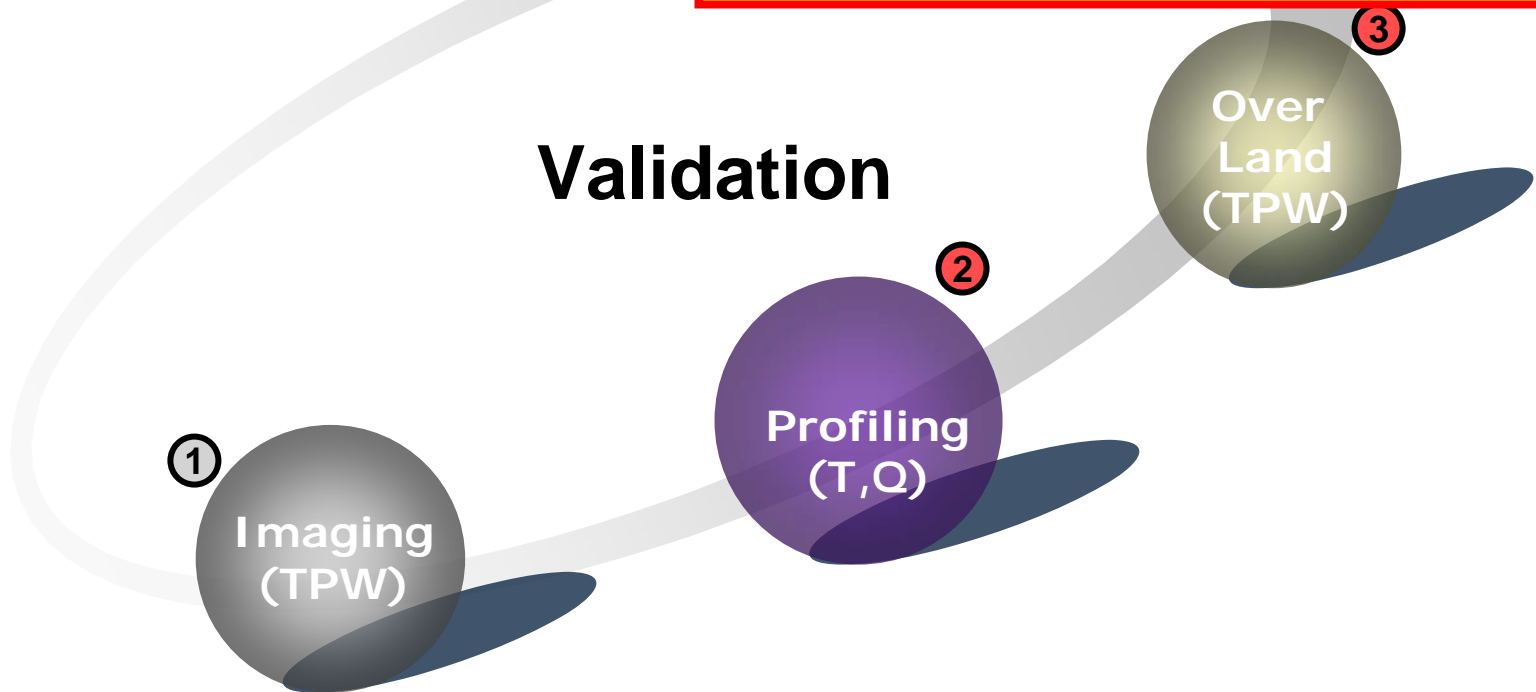

- ❖ Raob Profiles with at least 30 levels used. Ocean cases only. Retrievals up to 0.05 mbars. Assessment only up to 300 mbars.
- ❖ These are real data performances (stratified by sensor)
- ❖ Results shown here are cloudy (up to 0.15 mm from MIRS retrieval)
- ❖ Independent from NWP forecast information, including surface pressure
- ❖ Improvements in progress (scan-dependent covariance Matrix, air-mass pre-classification, etc)

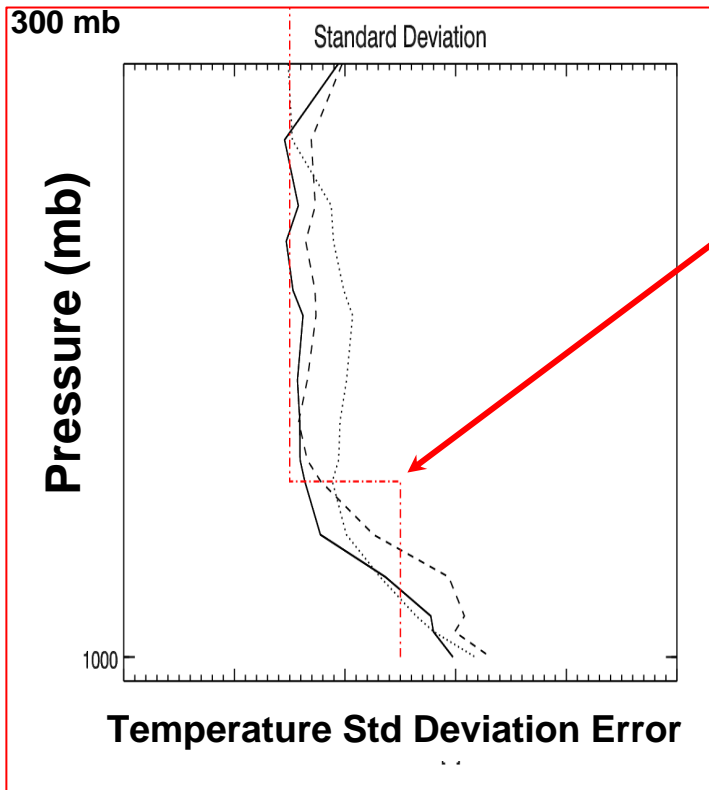


NPOESS
IORD-II
Requirements

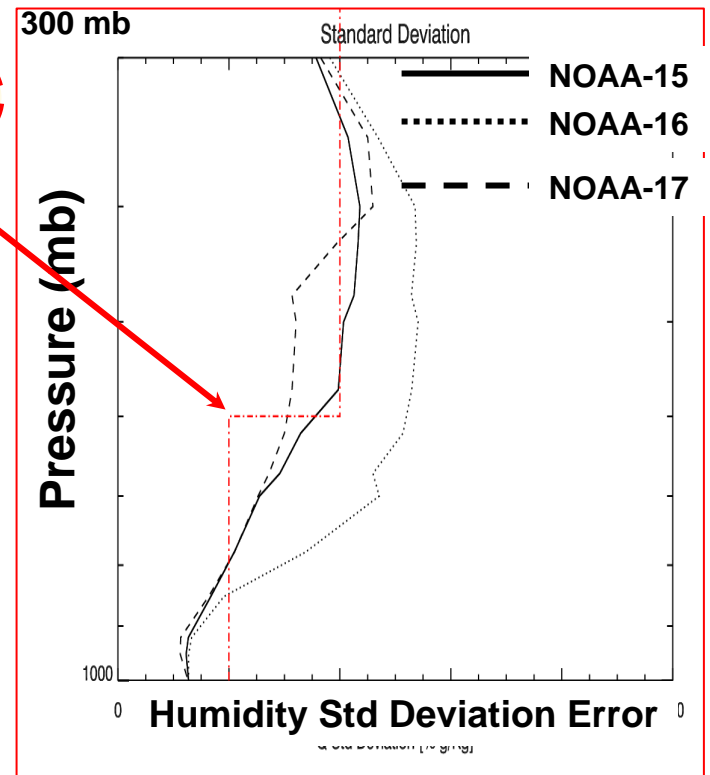


Importance of the Evaluation Set

Polar Profiles

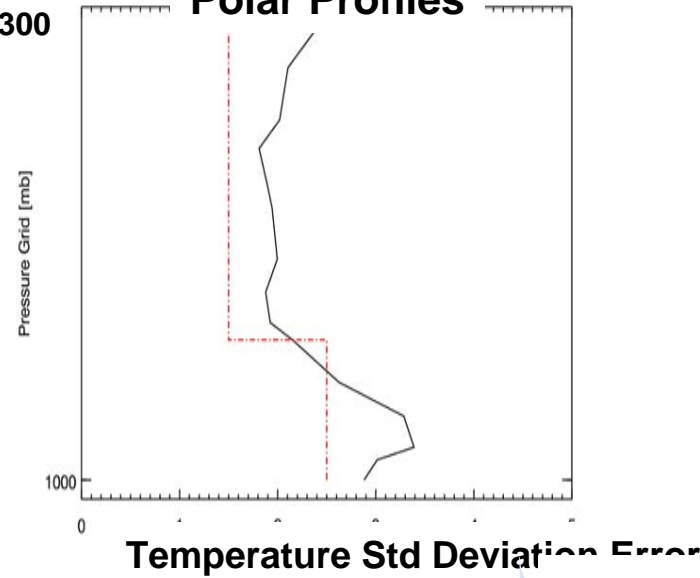


Tropical Profiles

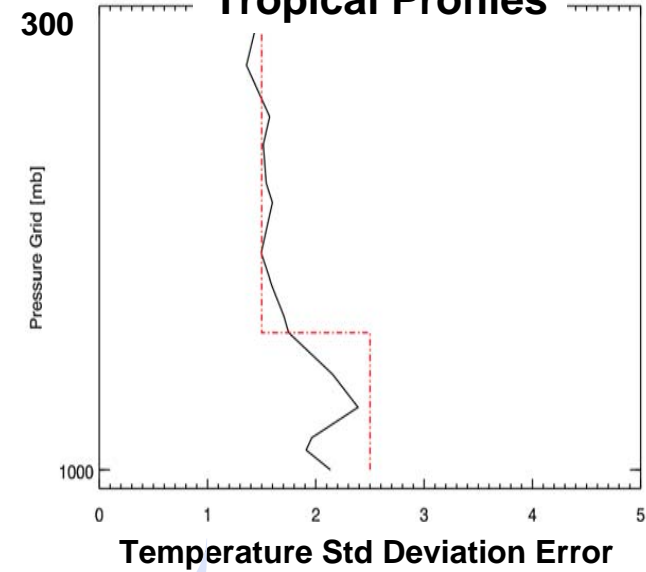

Focus of current efforts:

- Air-mass preclassification of the background
- Improvement expected from first guess

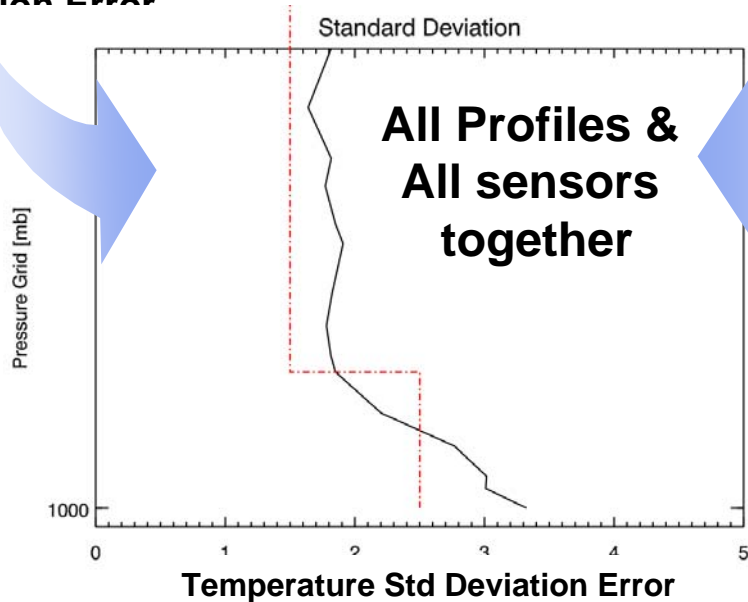


Caution must be exercised when comparing performances of algorithms on different sets.

Types of sets are critical (tropical, polar, clear, cloudy, etc and their relative percentage in the set).


- ❖ TPW retrieval extended over land
- ❖ Comparison with GDAS analyses
- ❖ Comparison with Radiosondes over land
- ❖ Sanity Check of MIRS Emissivity Over Land

Validation

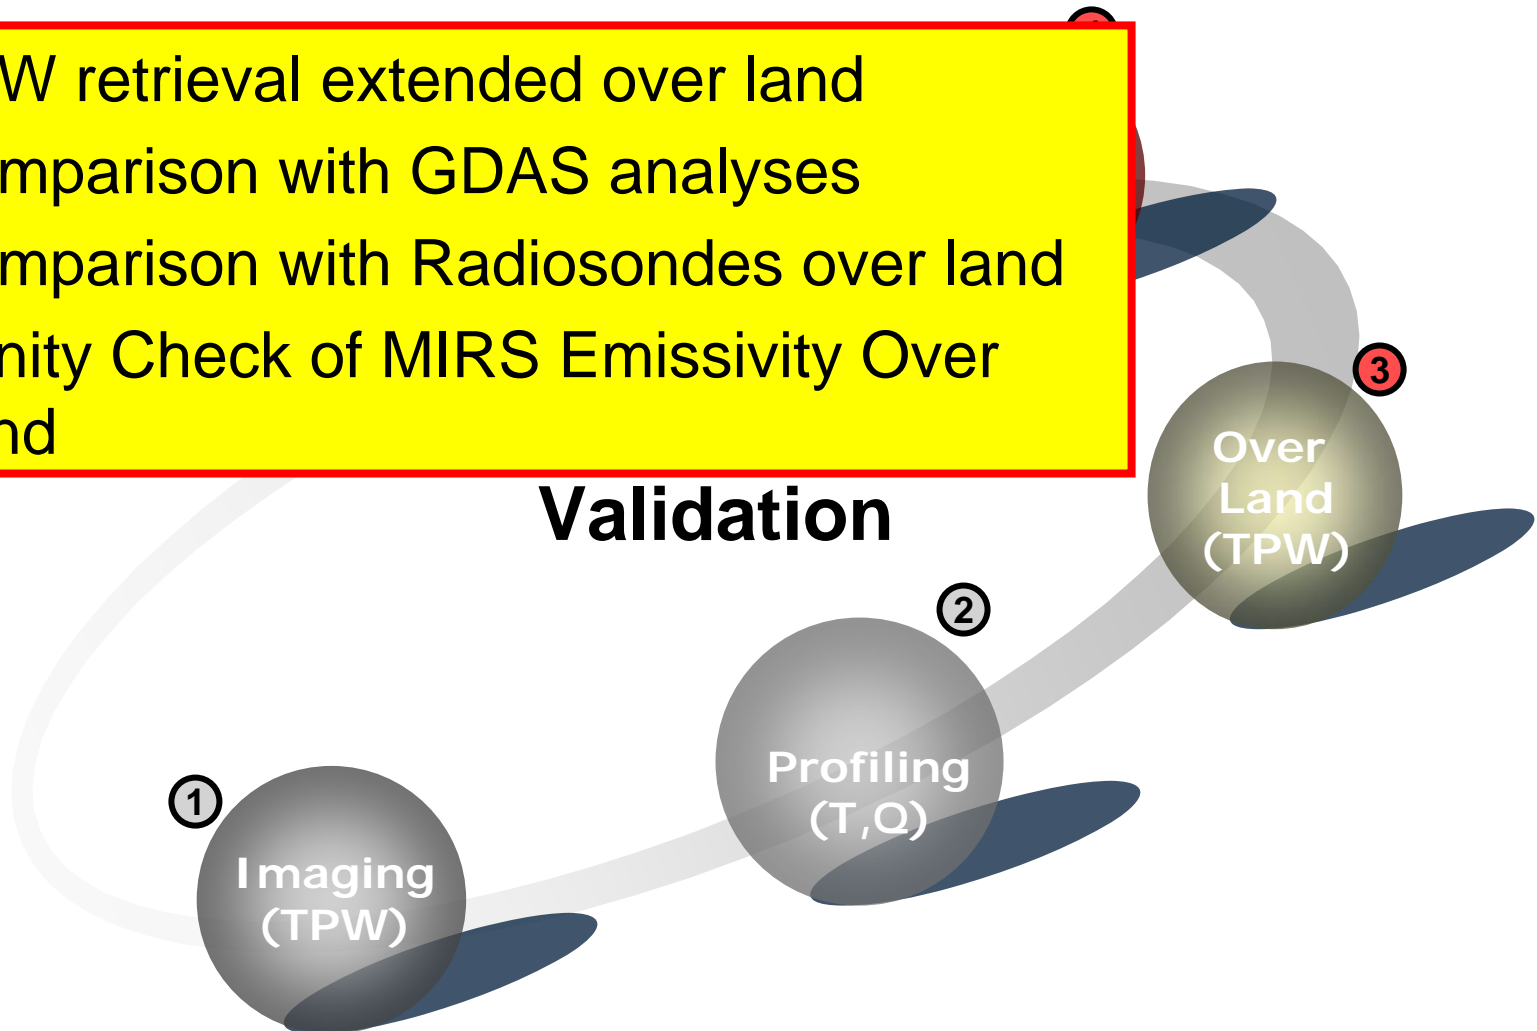

Microwave TPW Extended over Land


GDAS Total Precipitable Water
2006-02-01

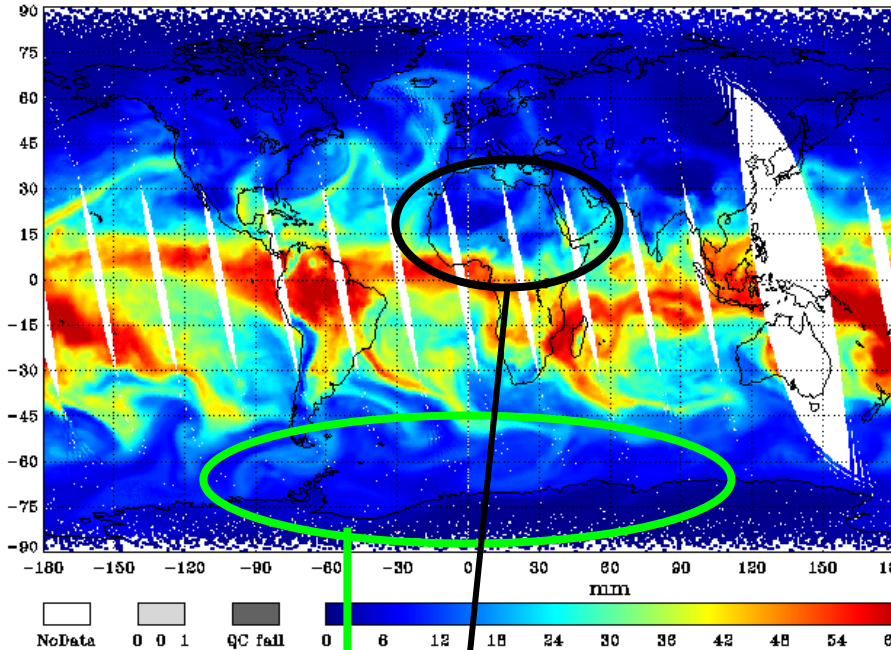

GDAS Analysis

snow-covered surfaces
need better handling


MIRS NOAA-18 AMSU-A/MHS EDR Total Precipitable Water
2006-02-01

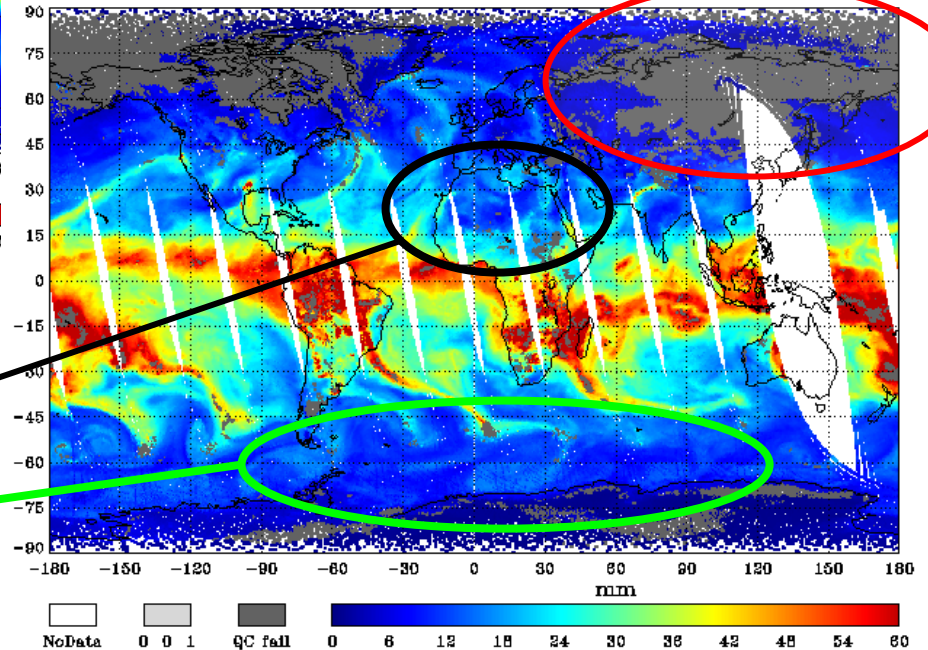


MIRS Retrieval

Retrieval over sea-ice and
most land areas
capturing same features as GDAS

MIRS-based TPW Performances over Land

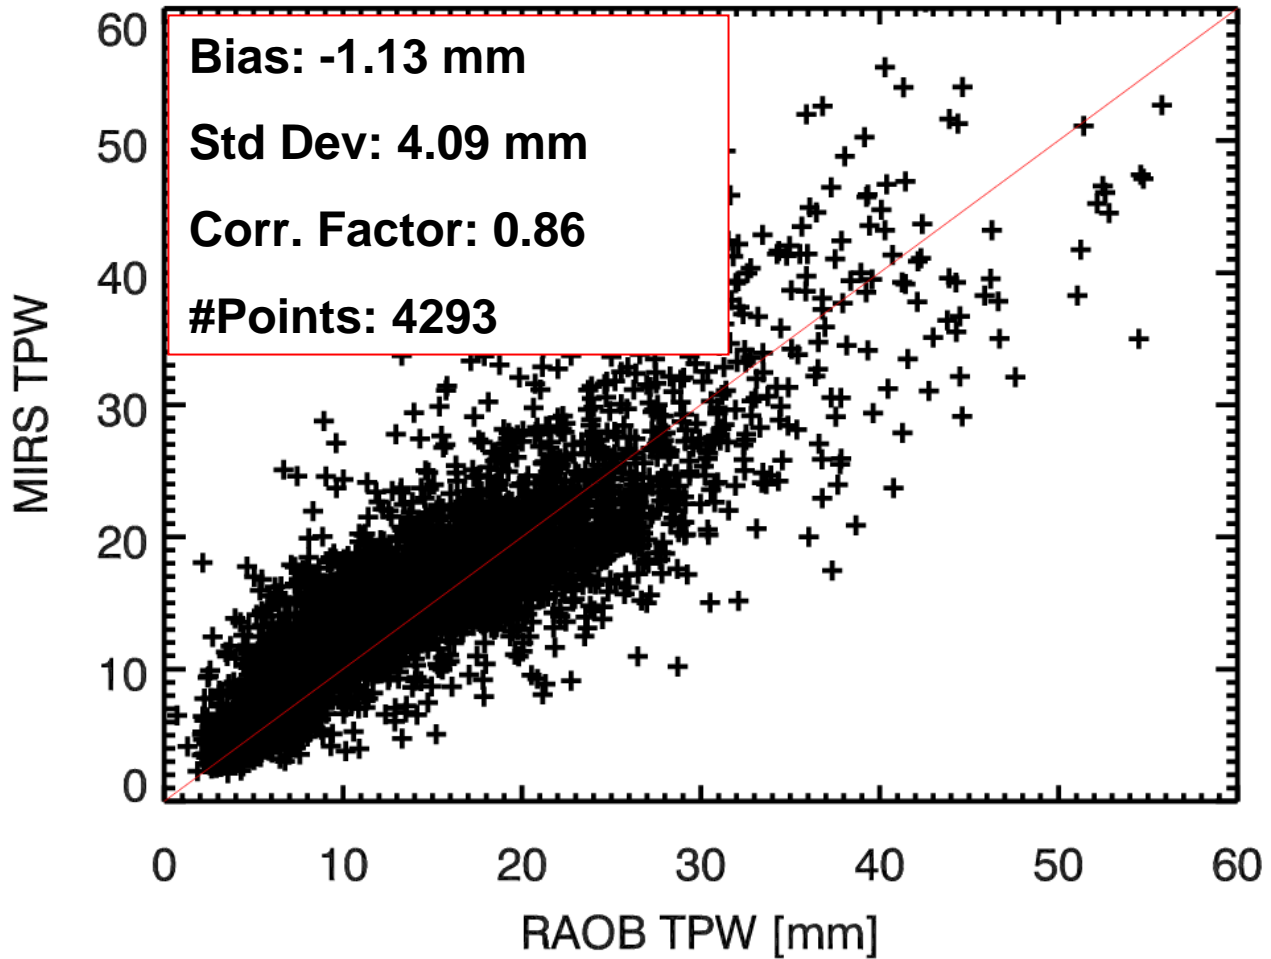


- ❖ ~4000 collection sites
- ❖ Only used for validation
- ❖ Only with ground truth
- ❖ Cloud-free conditions

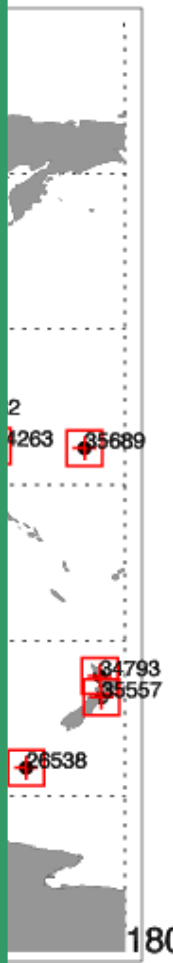


Extension of MIRS Validity Over Land

Same MIRS code used for retrieval over land and ocean.

MIRS-retrieved Emissivity @ Channel 2 F: 31.40GHz Pol:V+H 2006 JulDay: 32

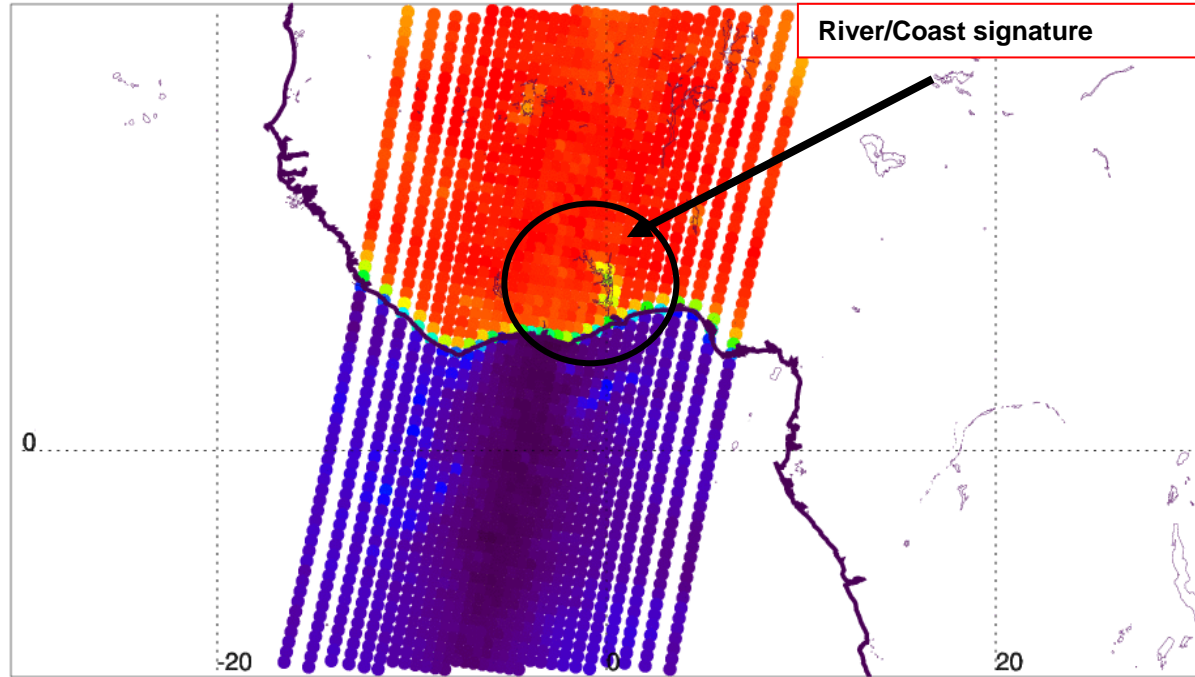


River/Coast signature



switch
sivity
es
e
hy)


GDAS Temperature at 200mb
2006-02-01

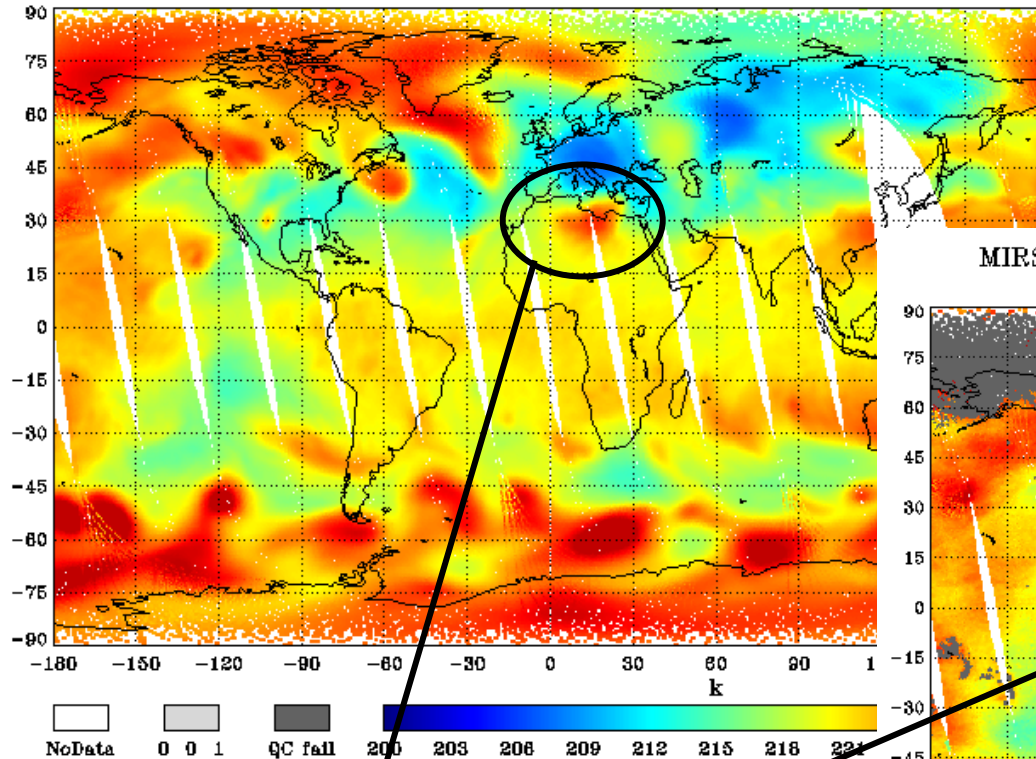

**No Scan-Dependence in retrieval
Smooth Transition Land/Ocean**


**QC-failure is based on convergence:
Focus of on-going work**

MIRS NOAA-18 AMSU-A/MHS EDR Temperature at 200mb
2006-02-01




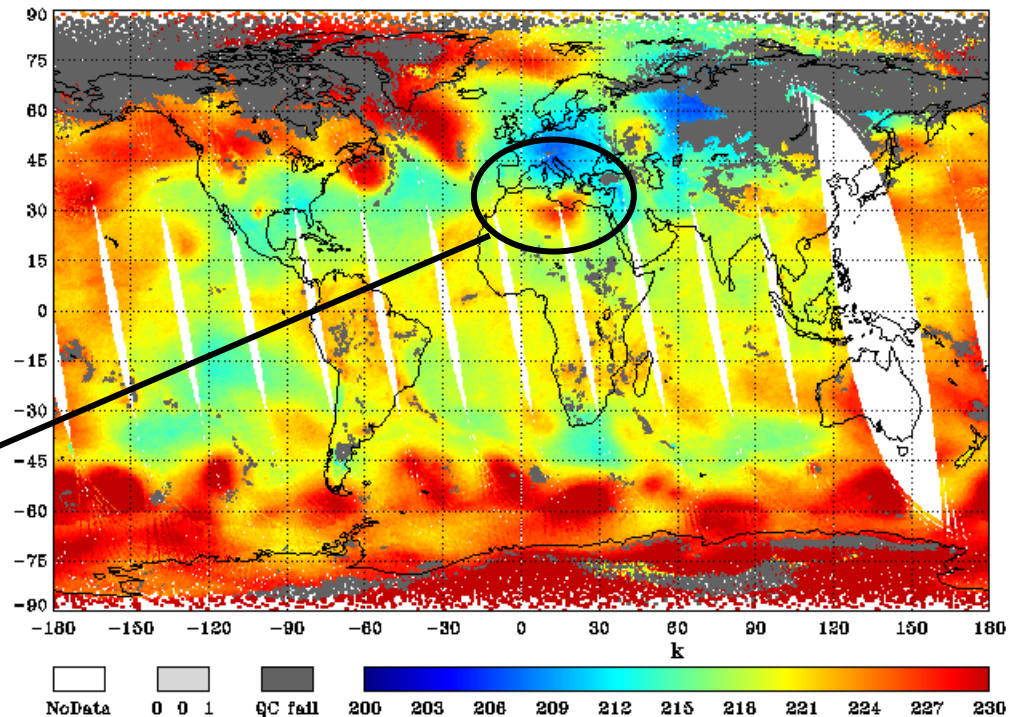


Similar Features Captured

❖ Temperature profiling in active regions
(using NOAA-18 sounders)



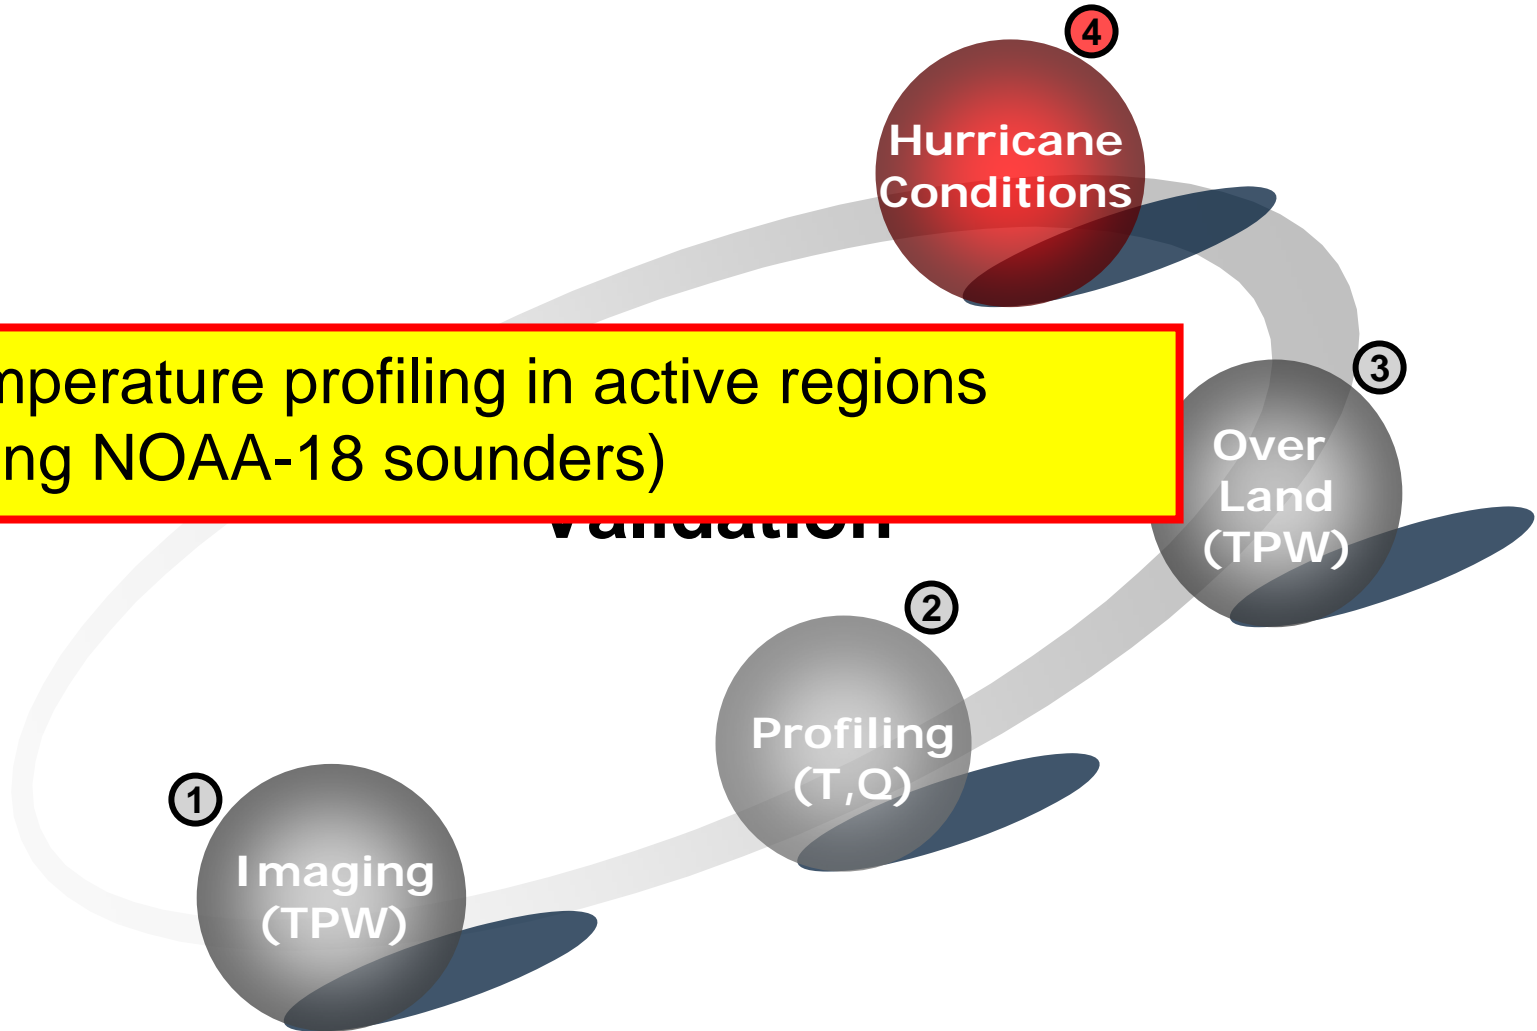


Challenges of Profiling in Active Areas

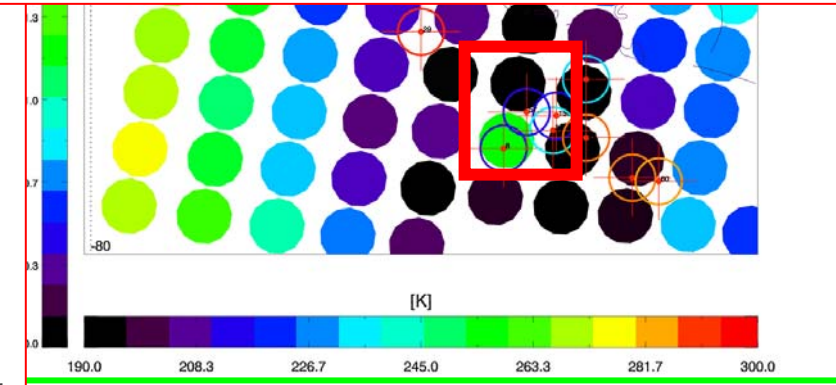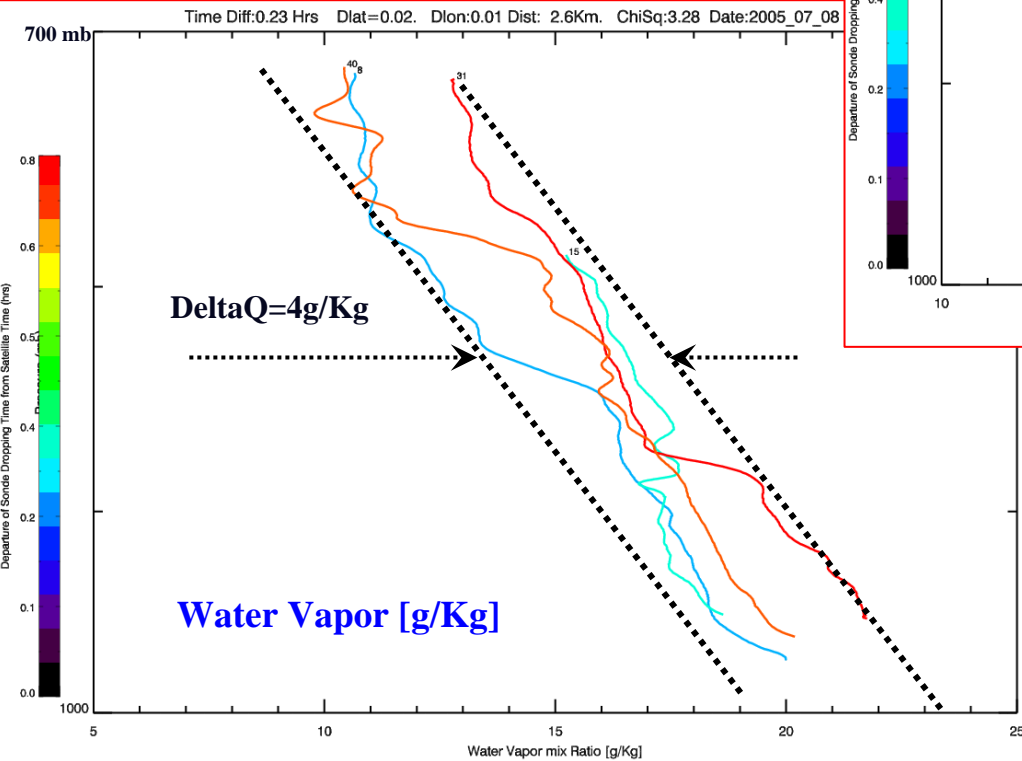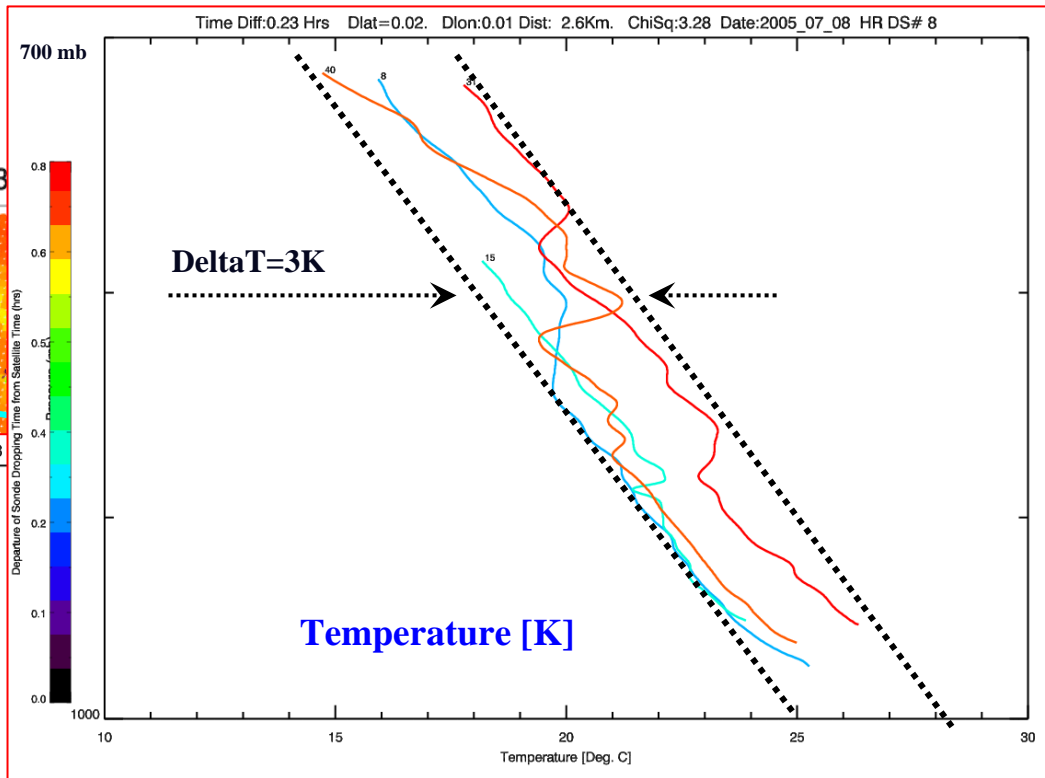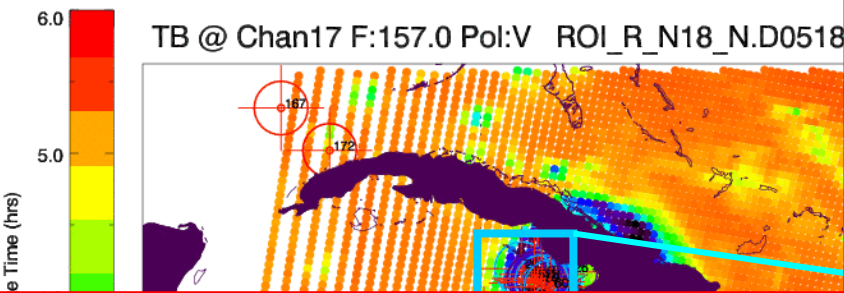



N-18 Profiling In Active Areas

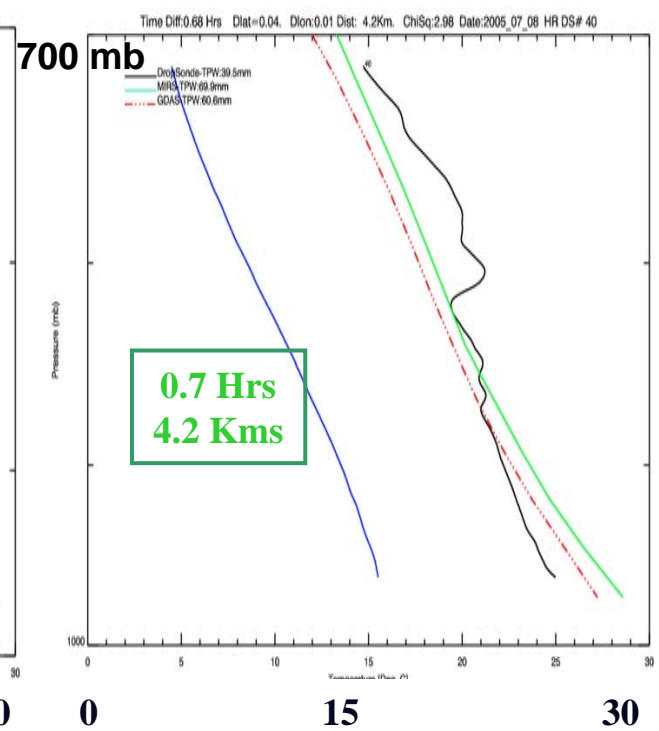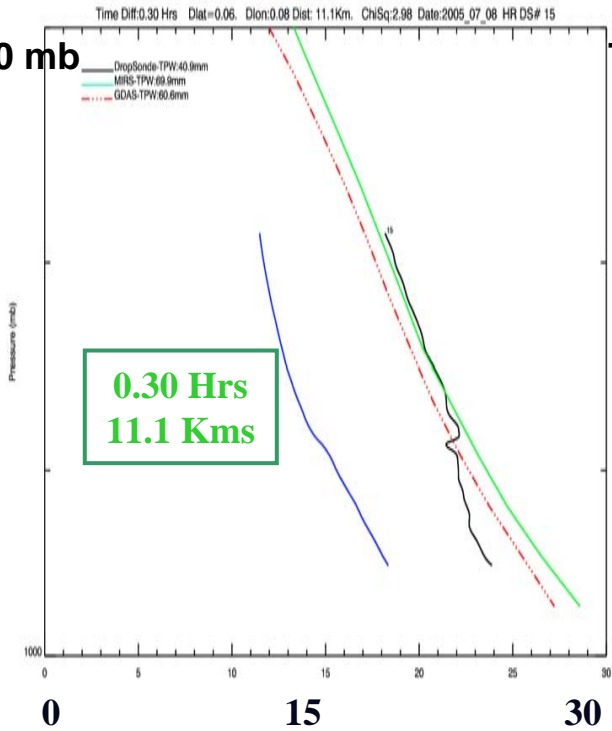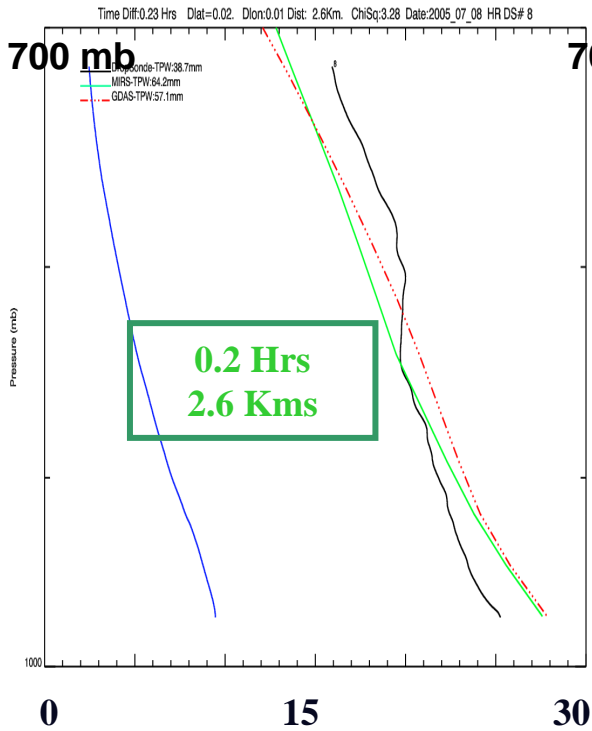

[Deg. C]
[Kms]


Deg C

Retrieval

GDAS

DropSonde

Profile of DS Distance Departure

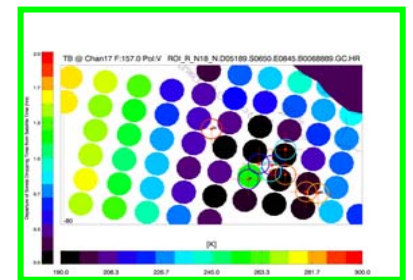



Contents



Overview



Algorithm Scientific Basis




Performance Evaluation



Summary & Online Access

MIRS Applications

**MIRS is applied to a number of microwave sensors,
Each time gaining robustness and improving validation
for Future New Sensors**

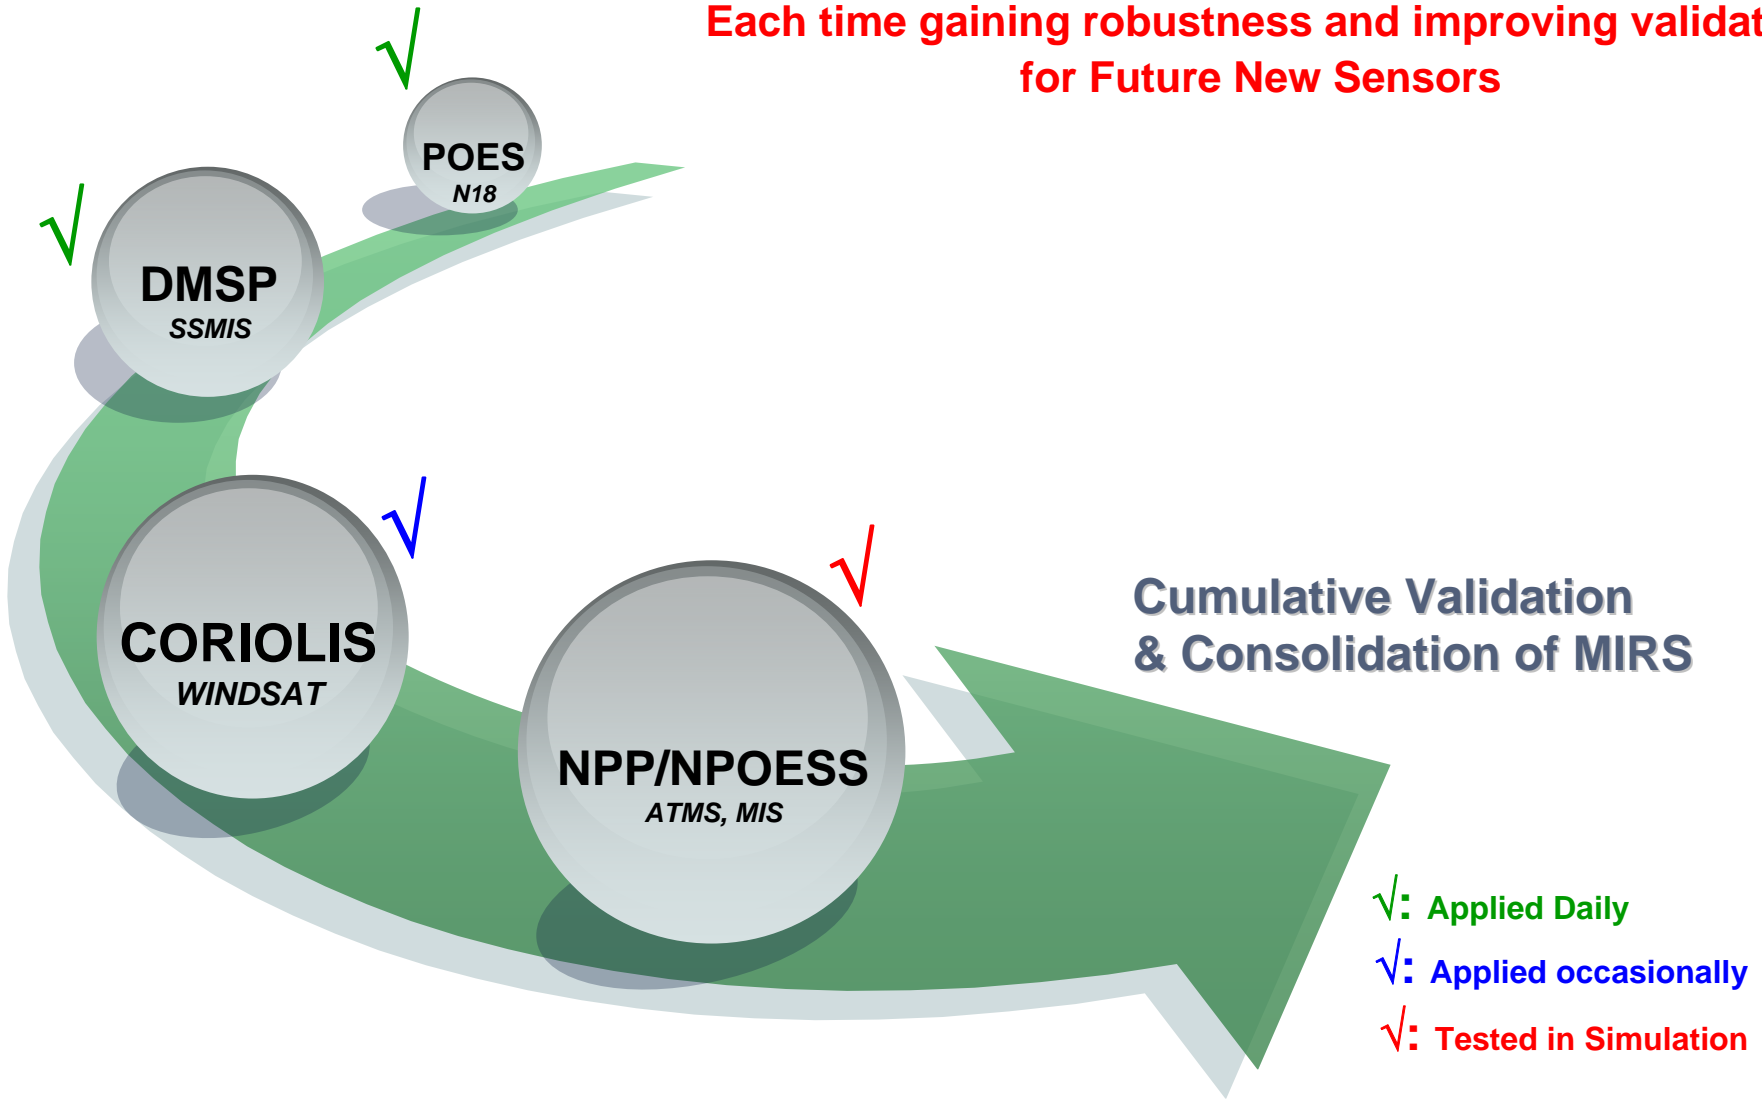



❖ Online Scrolling Menus

 **NOAA Satellites and Information**
National Environmental Satellite, Data, and Information Service

Sensor Physics Branch

Microwave Integrated Retrieval System

Home	Overview	Sensor	Algorithm	Testbed	Monitoring	Validation	Document	Download
					Geophysical Monitoring			Product
					Radiometric Monitoring			Geophysical Performance
					Telemetry Calibration Parameters			

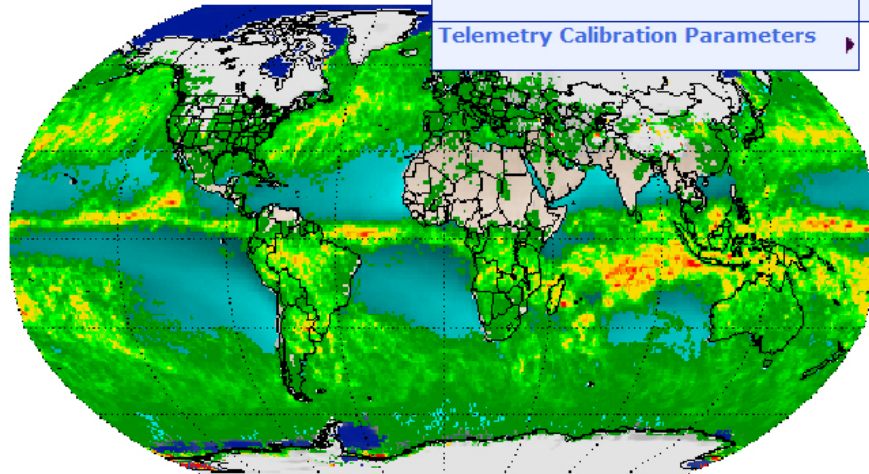



Products Performance Monitoring – Functionalities (cont'd)



MIRS Products Monitoring

Number of Panels 4

Animation

Panel 1

Sensor NOAA-18 AMSUA/MHS

Product Chi Square

Region Globe

Asc Des Combined

Land Sea All

Heritage Advanced

2006 Sep 23

Panel 2

Sensor NOAA-18 AMSUA/MHS

Product TPW

Region Globe


Asc Des Combined

Land Sea All


Heritage Advanced

2006 Sep 23


Panel 1

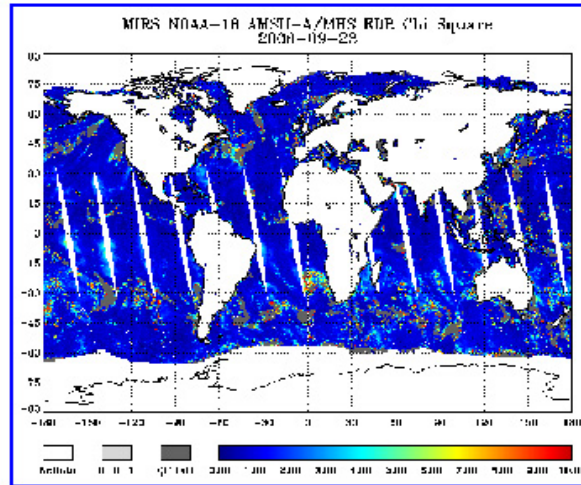


Panel 2

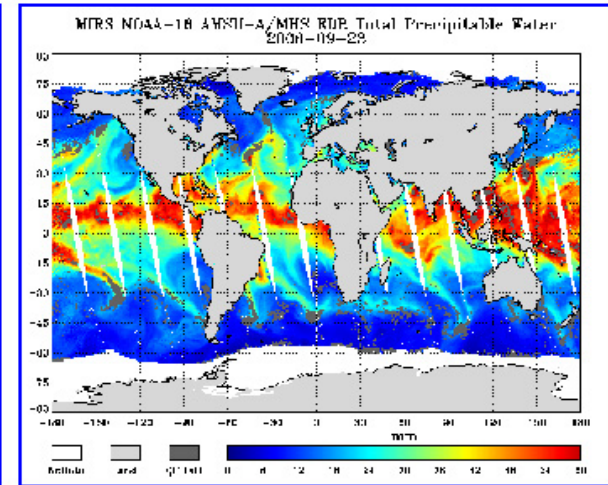

Panel 3

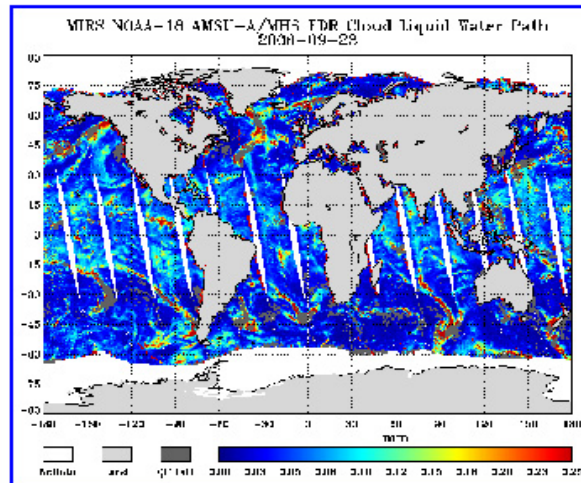

Panel 4

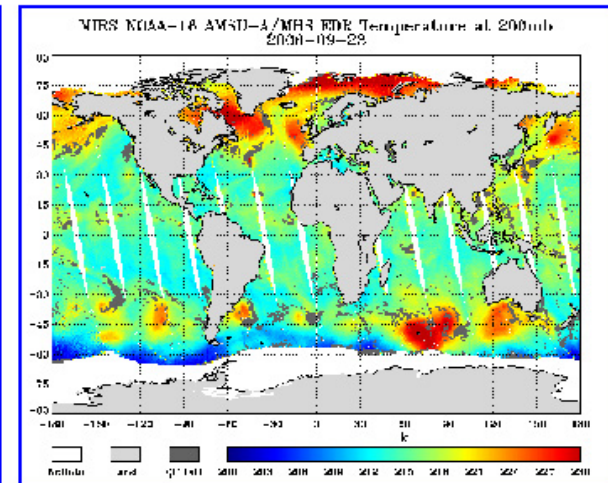



Thank You !

Questions?



BACKUP SLIDES

Bayes Theorem (of Joint probabilities)

$$P(X, Y) = P(Y | X) \times P(X) = P(X | Y) \times P(Y)$$



$$P(X | Y^m) = \frac{P(Y^m | X) \times P(X)}{P(Y^m)}$$

=1

ector X
ce
m

ector X:

Core Retrieval Mathematical Basis

Maximizing $P(X | Y^m) =$

$$\left\{ \exp \left[-\frac{1}{2} (X - X_0)^T \times B^{-1} \times (X - X_0) \right] \times \exp \left[-\frac{1}{2} (Y^m - Y(X))^T \times E^{-1} \times (Y^m - Y(X)) \right] \right\}$$



Is Equivalent to Minimizing

$$- \ln \left(P(X | Y^m) \right)$$




**Which amounts to Minimizing $J(X)$ –also called *COST FUNCTION* –
Same cost Function used in 1DVAR Data Assimilation System**

$$J(X) = \left[\frac{1}{2} (X - X_0)^T \times B^{-1} \times (X - X_0) \right] + \left[\frac{1}{2} (Y^m - Y(X))^T \times E^{-1} \times (Y^m - Y(X)) \right]$$

exp




System Design & Architecture

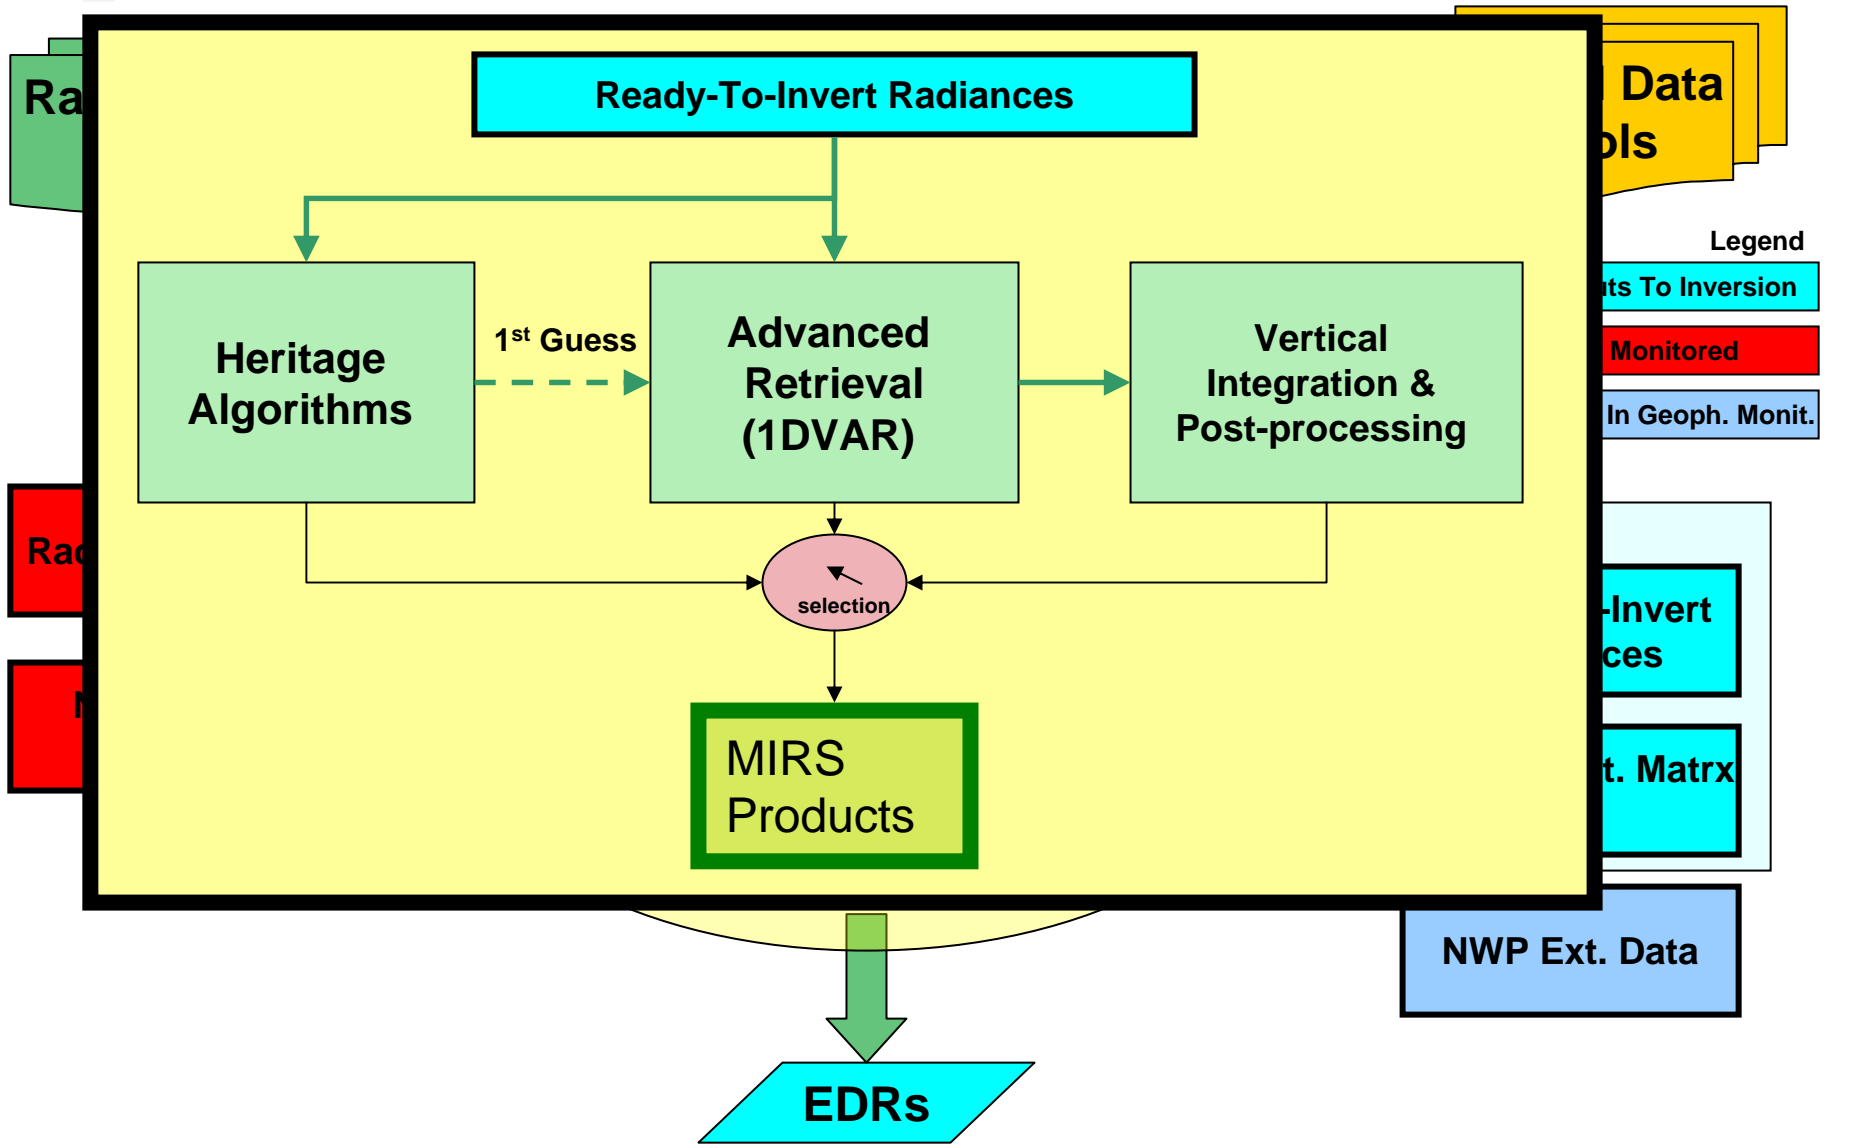



System Design & Architecture

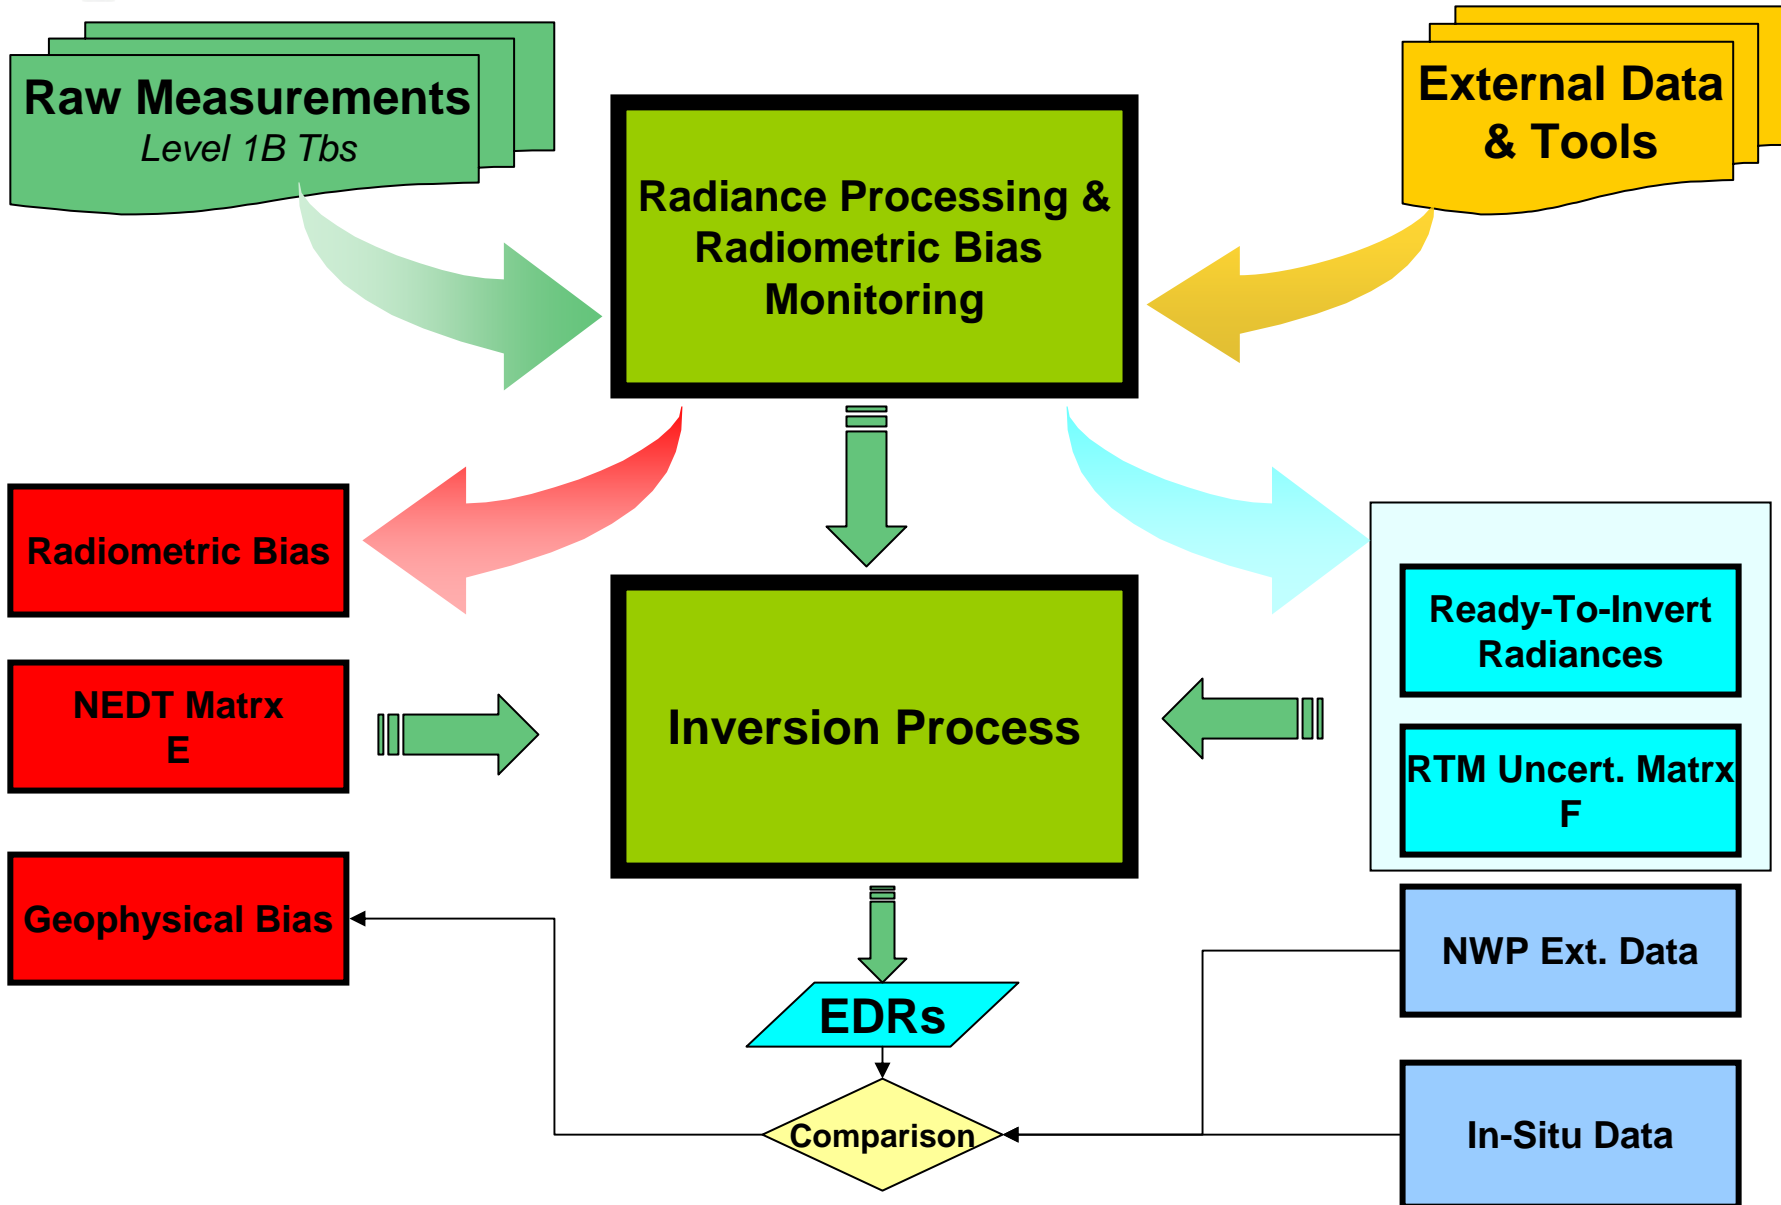

Nominal approach: Simultaneous Retrieval

F(X) Does not Fit Y^m within Noise



X is not the solution

Necessary Condition (but not sufficient)

F(X) Fits Y^m within Noise levels



X is a solution



X is the solution



All parameters are retrieved simultaneously to fit all radiances together



Assumptions Made in Solution Derivation




- ❖ The PDF of X is assumed Gaussian
- ❖ Operator Y able to simulate measurements-like radiances
- ❖ Errors of the model and the instrumental noise combined are assumed (1) non-biased and (2) Normally distributed.
- ❖ Forward model assumed locally linear at each iteration.

- ❖ All retrieval is done in EOF space, which allows:
 - Retrieval of profiles (T,Q, RR, etc): using a limited number of EOFs
 - More stable inversion: smaller matrix but also quasi-diagonal
 - Time saving: smaller matrix to invert

❖ Mathematical Basis:

- EOF decomposition (*or Eigenvalue Decomposition*)
 - By projecting back and forth Cov Matrix, Jacobians and X


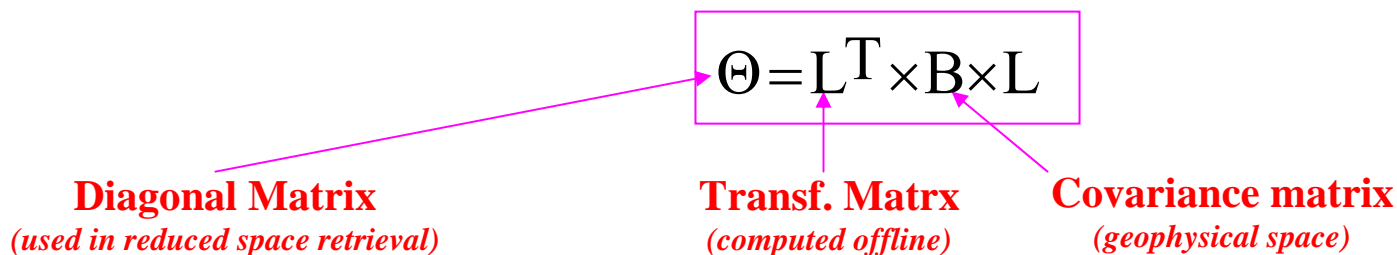




Retrieval in Logarithm Space



Advantages: (1) Distributions made more Gaussian
& (2) No risk of having unphysical negative values

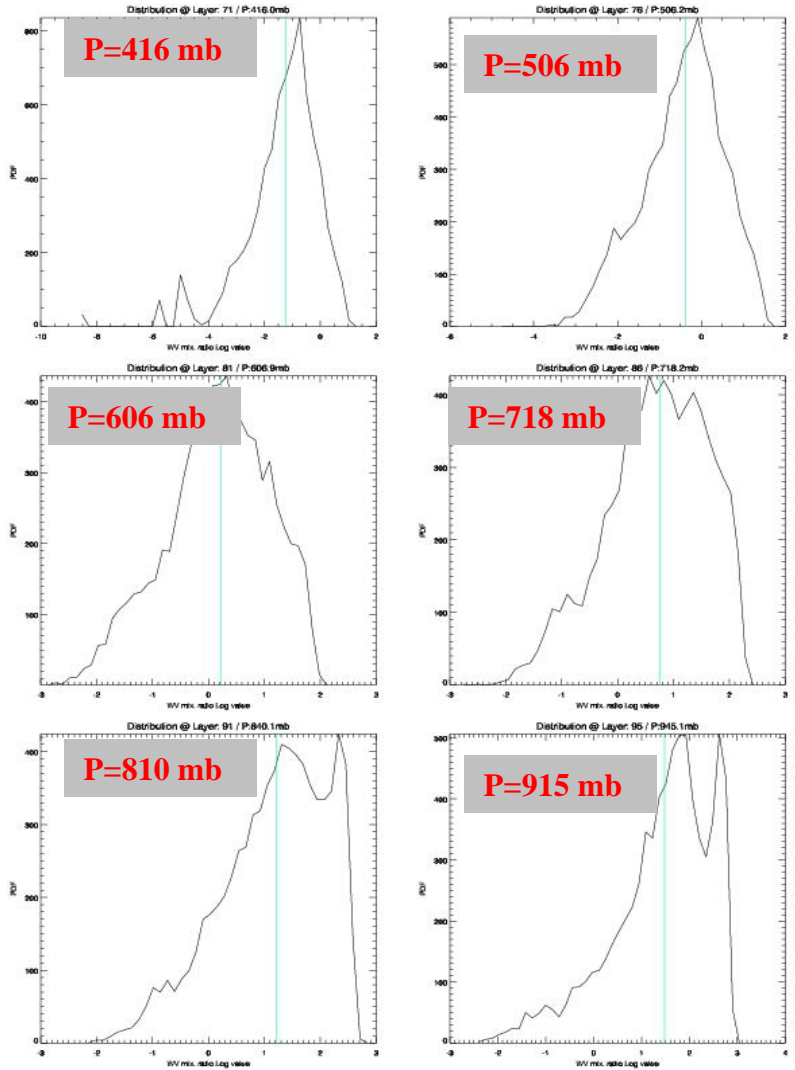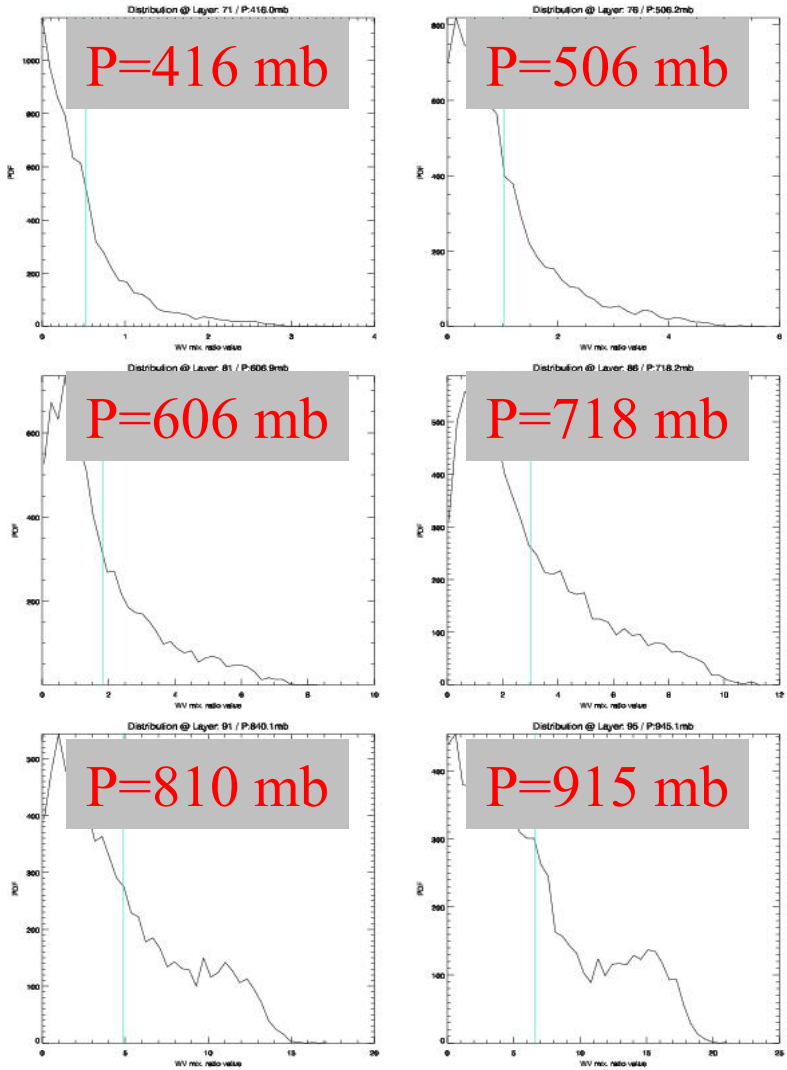

Applied to WV, Cloud and precip

$$J_1 = \frac{\partial R}{\partial \text{Log}(x)} = \frac{\partial R}{\partial x} \times \frac{\partial x}{\partial \text{Log}(x)} = J \times x$$



Validation Approach



❖ Use of Multiple Microwave Sensors:


- AMSU A/B (or MHS) onboard NOAA-15-16-17-18
- WINDSAT onboard CORIOLIS
- SSMI/S onboard DMSP F-16

❖ Two Types of Validation, depending on parameter

- Quantitative Validation
 - NWP Data (GDAS)
 - Heritage Algorithms (MSPPS)
 - Conventional Radiosondes (from NCEP and from NCDC)
 - GPS-DropSondes
- Qualitative Validation
 - Science Constraints in Retrieval System
 - Capture of known meteorological phenomena

❖ Metrics:


- Standard statistical metrics Bias/RMS/StdV/Correlation
- Case By Case Evaluation (especially for active areas)

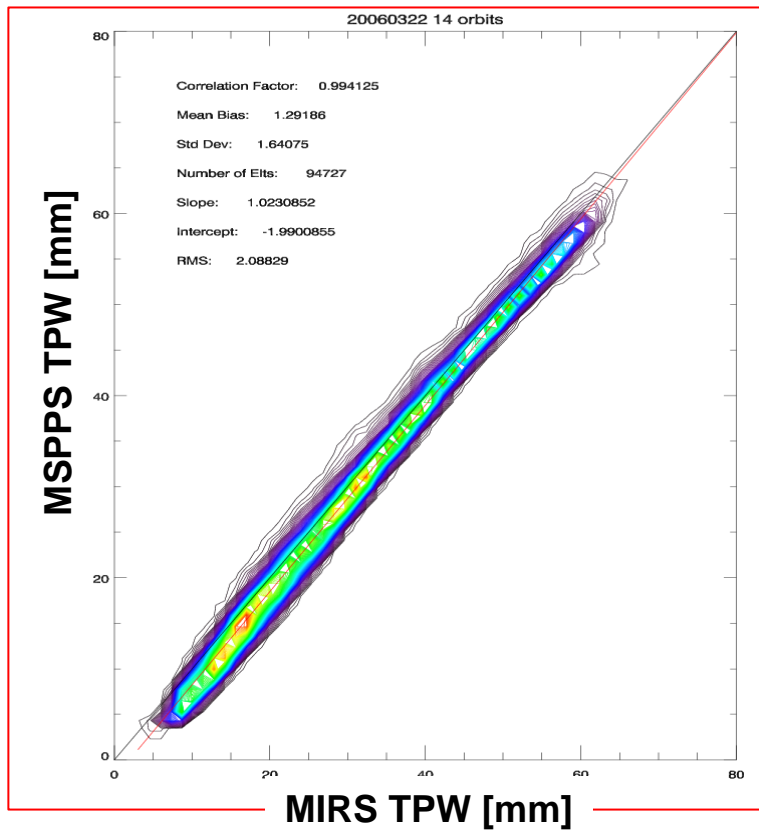

- ❖ MSPPS TPW used as reference
- ❖ MIRS retrieves the humidity profile. The TPW is integrated in post-processing stage.
- ❖ MSPPS relies on NWP forecast for both SST and Wind (emissivity).
- ❖ MIRS is independent of NWP data (even from surface pressure).


FNMOC Operational Algorithm

SSMIS Retrieved Cloud Liquid Water Path over Ocean
2006-06-29

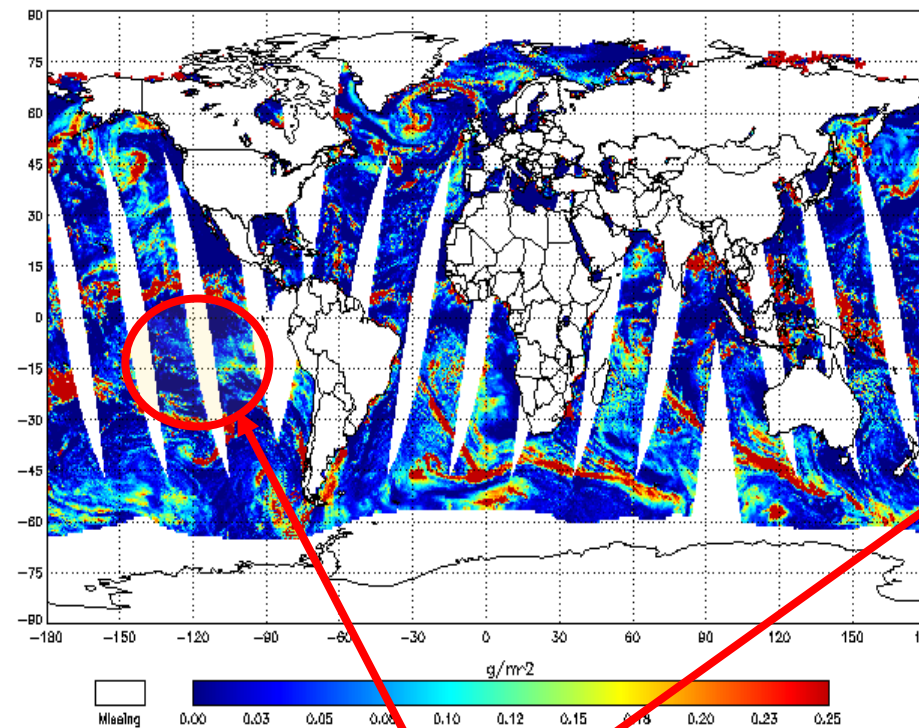

MIRS Algorithm

MIRS SSMIS EDR Cloud Liquid Water Path over Ocean
2006-06-29

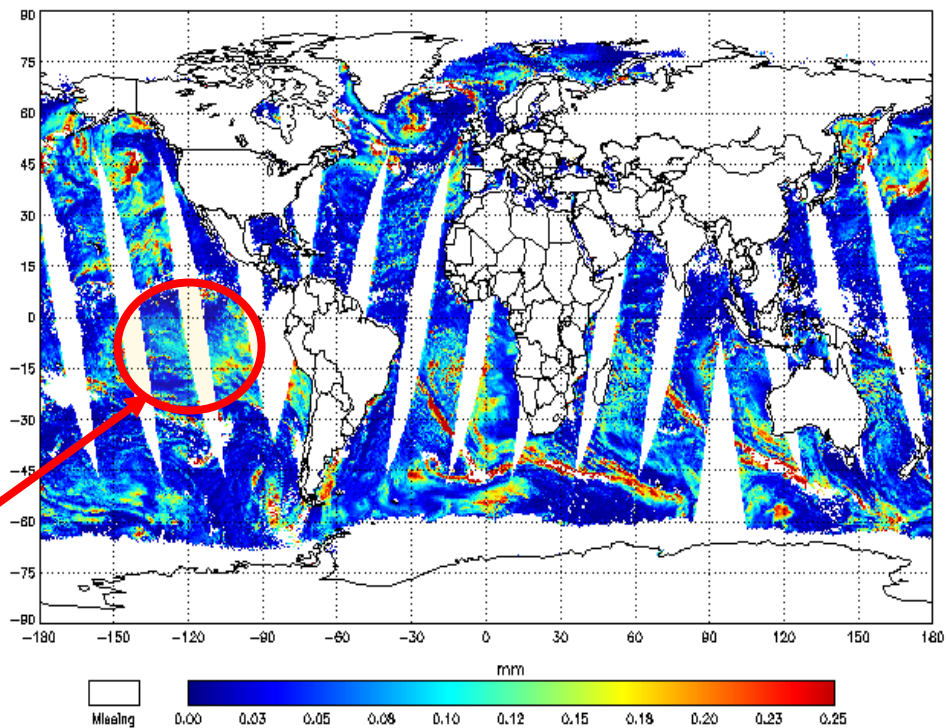


**MIRS is more sensitive to small values
(due to use of higher frequency channels)**

Retrieval using DMSP F16 SSMI/S

In-Situ Global Distribution

	Source	Period	Coverage	# of Points	Ref.
POES NOAA15	NCEP	2002-2004	Ocean	1255	Liu & Weng 2004
POES NOAA16	NCEP	2002-2004	Ocean	1655	Liu & Weng 2004
POES NOAA17	NCEP	2002-2004	Ocean	1522	Liu & Weng 2004
POES NOAA18	NCDC-IGRA	2005-2006	Land	~8,000	Durre et al. 2006

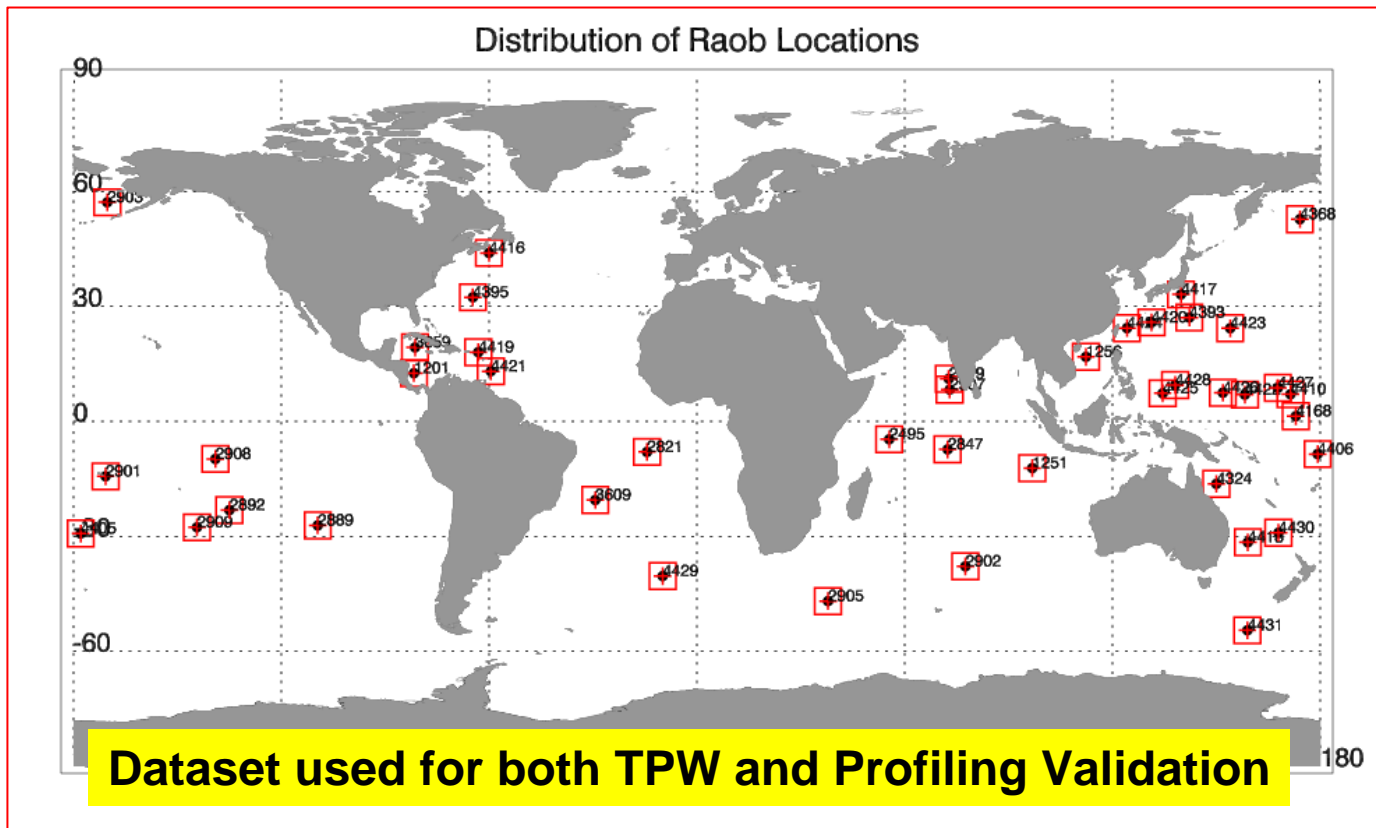






Retrieval Bias vs. Viewing Angles


Match-up TPW from radiosondes and AMSU retrieval in 2002.

Bias variation to viewing angles.


Bias = radiosonde - AMSU

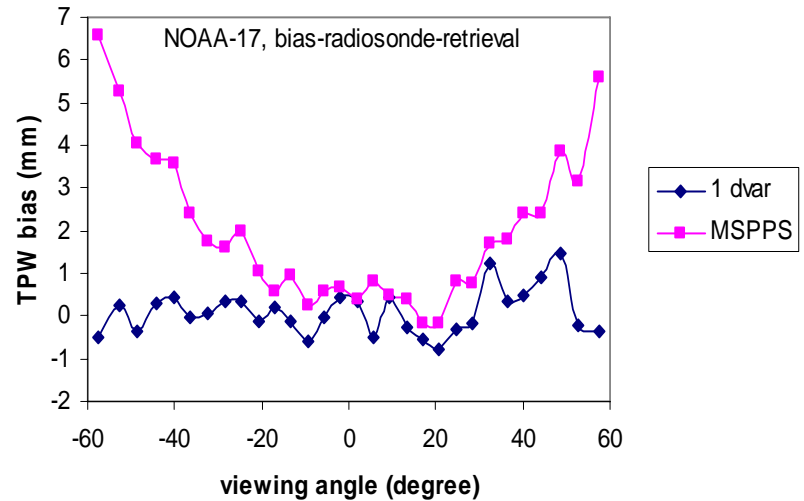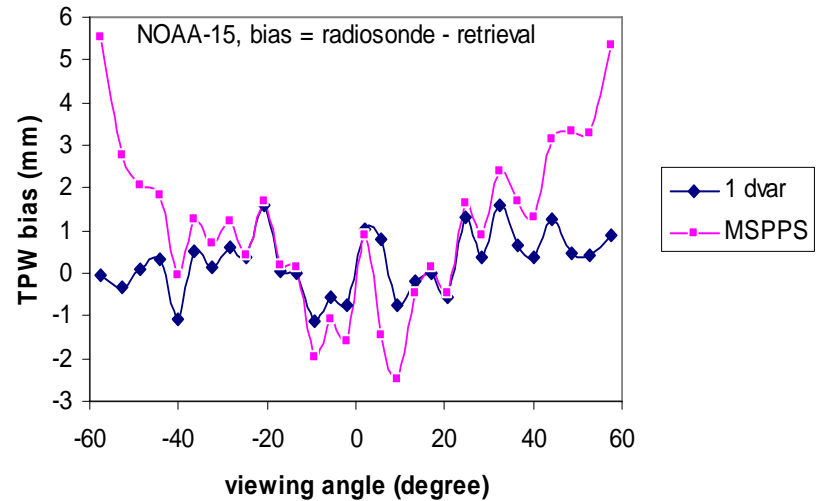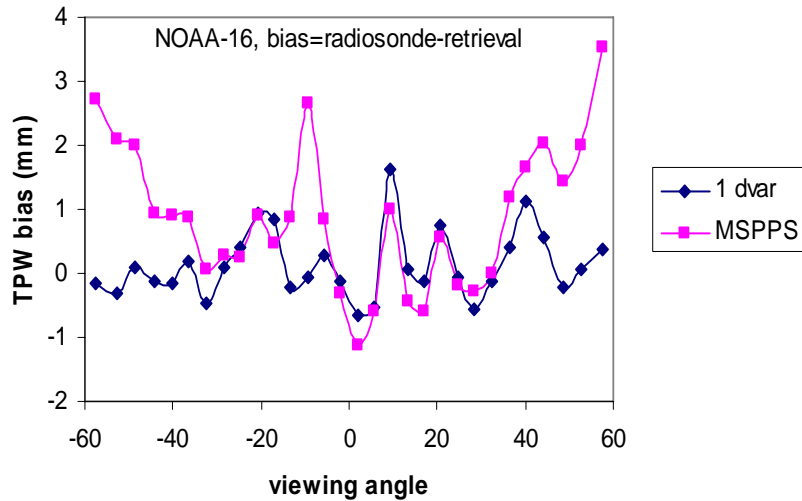

Emissivity Difference @ 31 GHz

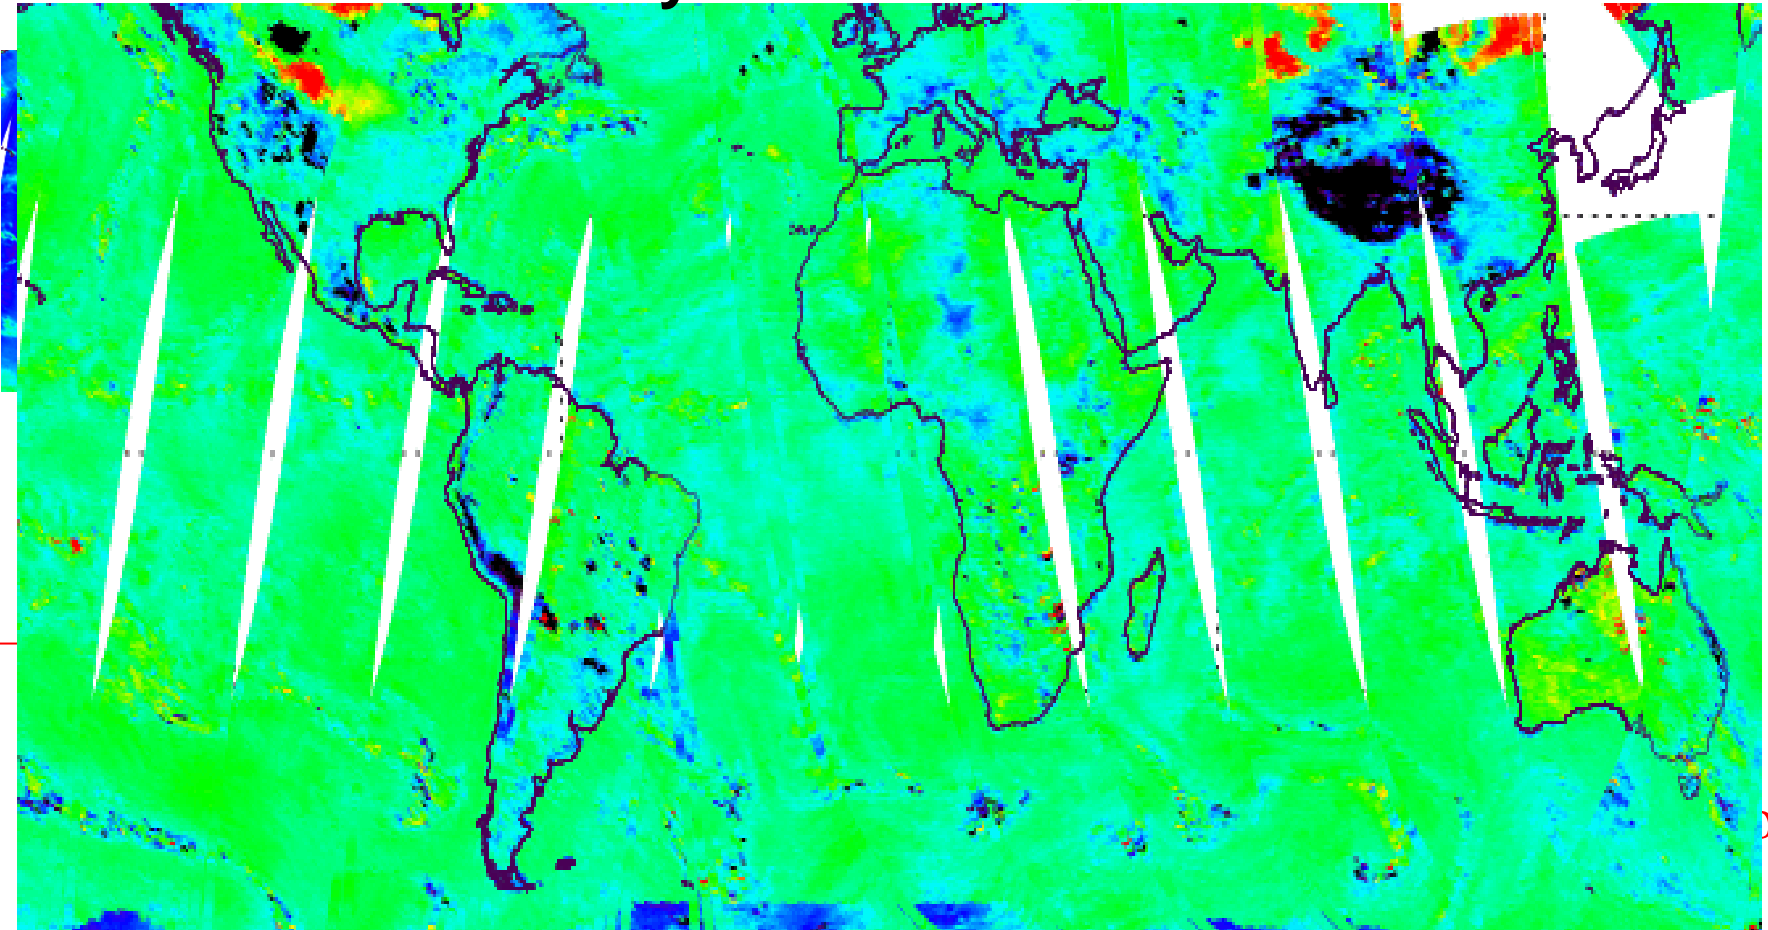


❖ Use of GDAS (T, Q, T_{skin}) as 1st guess & Beam move

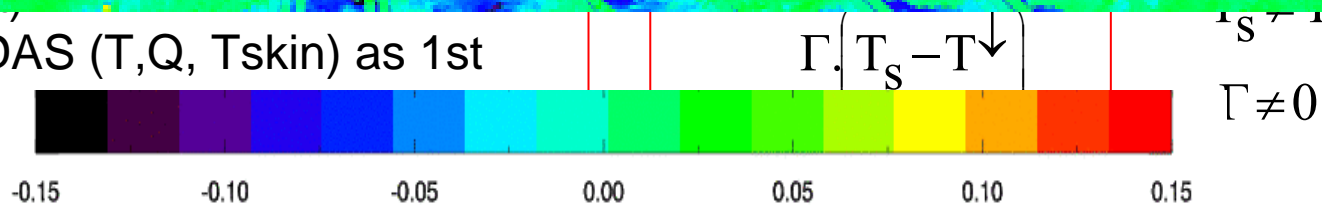

ons:


Global Humidity Profiling

GDAS Water Vapor Content at 500mb
2006-02-01

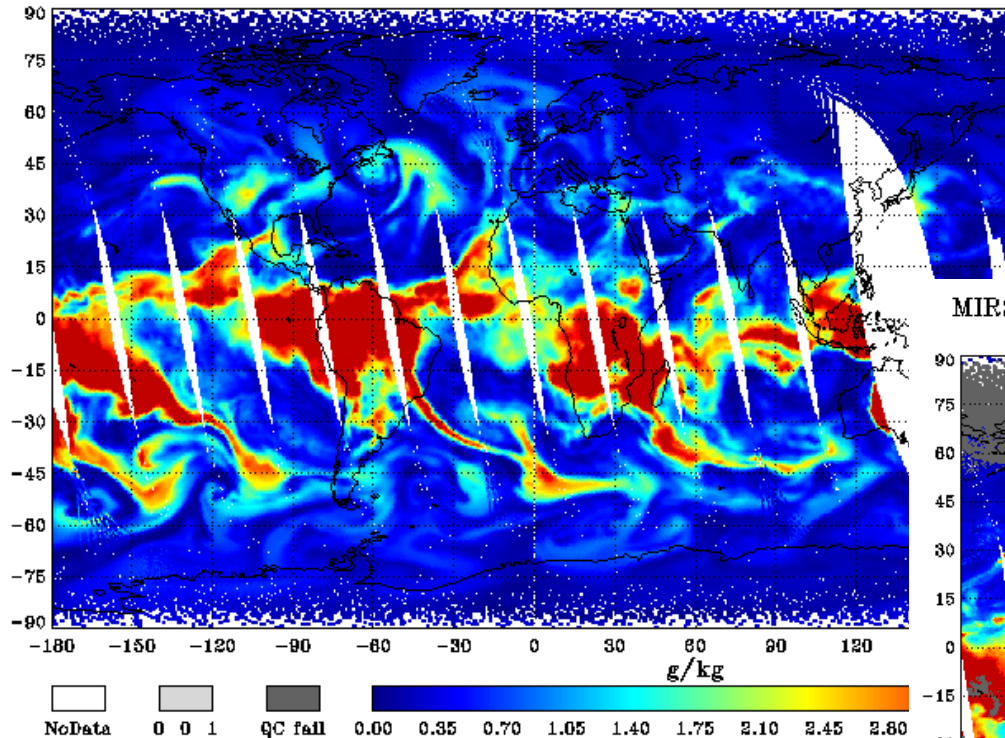

**No Scan-dependence noticed:
Angle dependence properly
accounted for**

MIRS NOAA-18 AMSU-A/MHS EDR Water Vapor Content at 500mb
2006-02-01

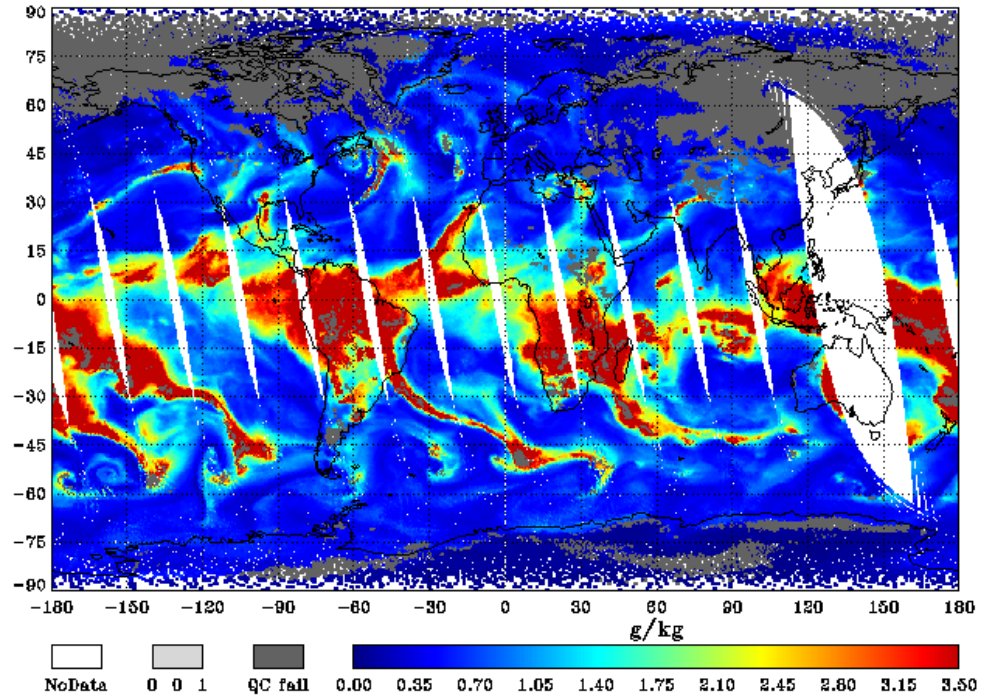

5
Hurricane
Conditions

4
Over
Land

- ❖ Effect of using scattering RTM on convergence
- ❖ Skin temperature retrieval using WINDSAT in eye of hurricane
- ❖ Temperature profiling in active regions (using NOAA-18 sounders)

Products



WINDSAT Retrieval (Chi Square)

Rain Model OFF

Rain Model ON

Retrieval using Windsat data (sdr68)
Spatial resolution of 6.8 GHz (50 kms)
But with a lot of oversampling

ChiSq EDR_fws_d20050706_s210542_e2


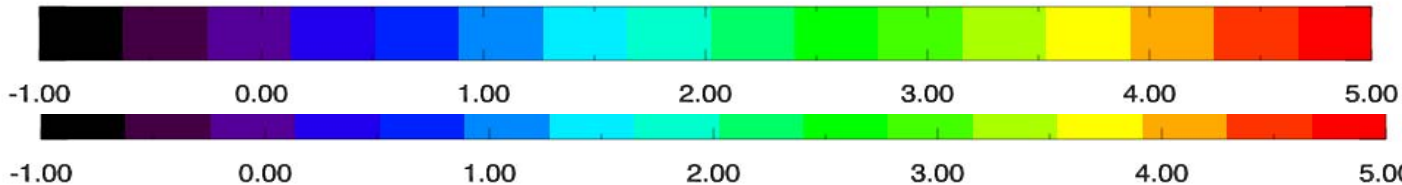
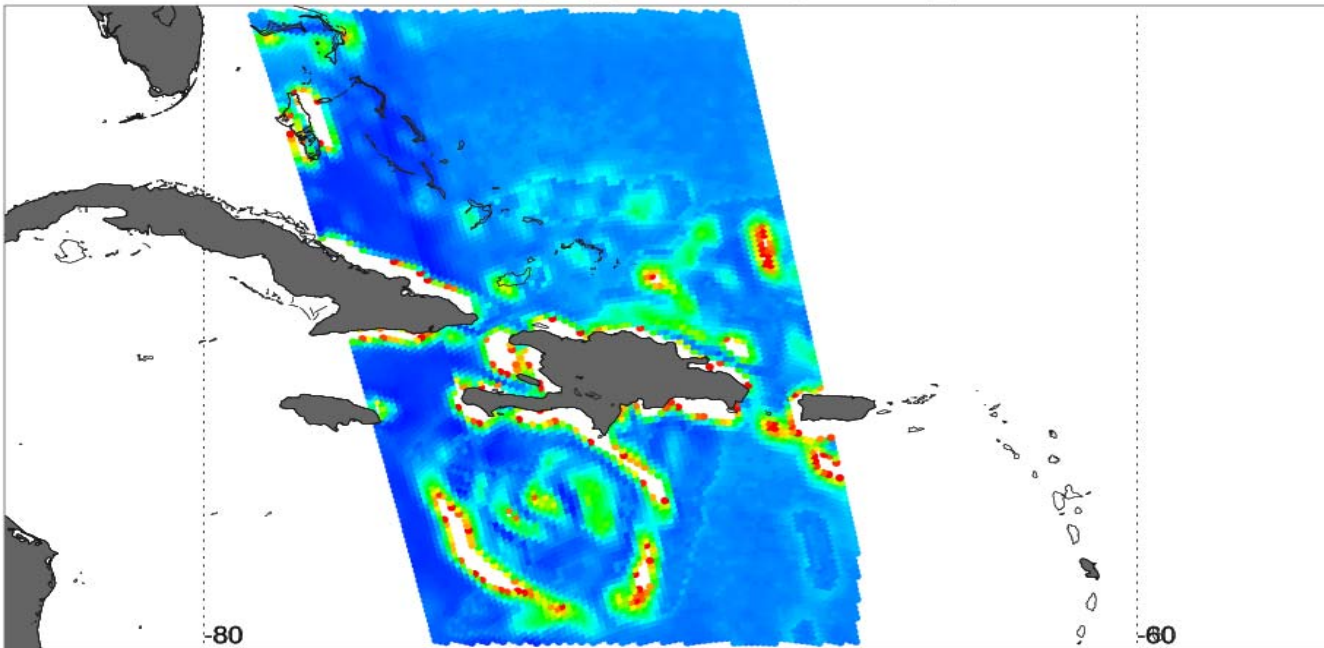


During Hurricane Dennis on July 6th 2005, WINDSAT Data captured Skin Temperature Cooling inside Eye of Hurricane

Dennis Hurricane Track, Courtesy of National Hurricane Center

MIRS SST Retrieval Using WINDSAT (Frq 6 to 5)

Tskin EDR_fws_d20050706_s2_0542_e2

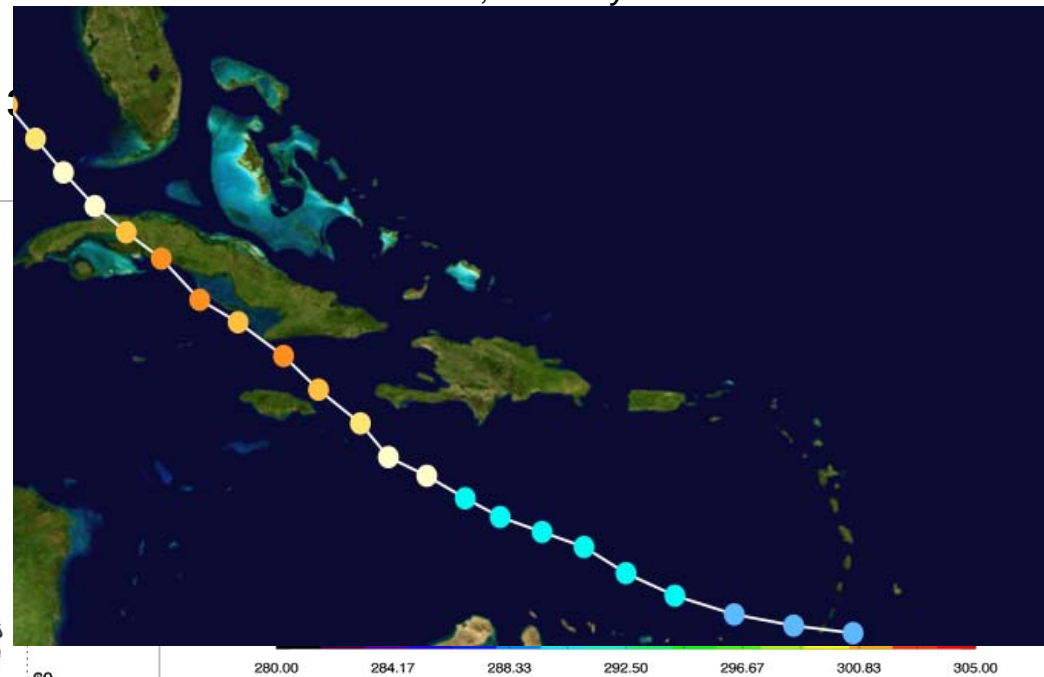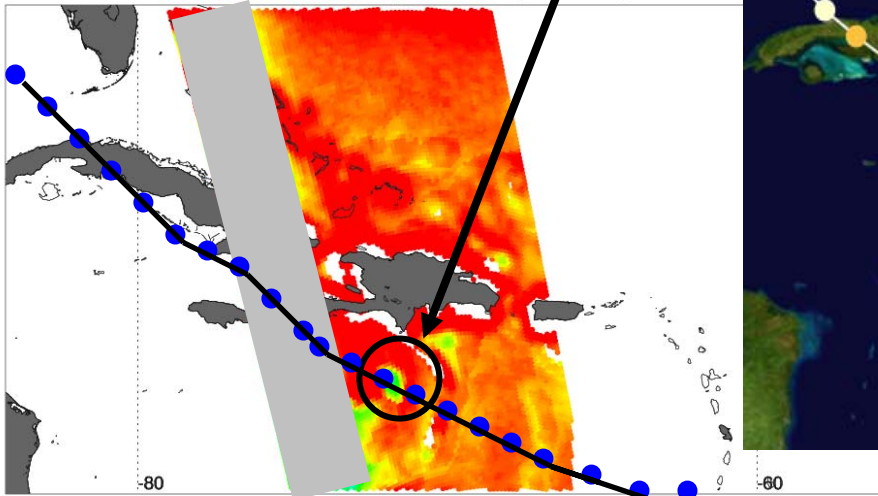

International TOVS Study Conference, 15th, ITSC-15, Maratea, Italy, 4-10 October 2006
Madison, WI, University of Wisconsin-Madison, Space Science and Engineering Center,
Cooperative Institute for Meteorological Satellite Studies, 2006.