



NOAA Satellites and Information

National Environmental Satellite, Data, and Information Service



Recalibration and Reprocessing of MSU/AMSU Observations for Climate Studies

Cheng-Zhi Zou

NOAA/NESDIS/Office of Research and Applications

15th International TOVS Study Conference, Maratea, Italy, October 4-10, 2006



Acknowledgment

Mitch Goldberg

NESDIS/ORA

Zhaohui Cheng

QSS Group, Inc.

Jerry Sullivan

NESDIS/ORA

Changyong Cao

NESDIS/ORA

Mei Gao


CAMS/CMA

Dan Tarpley

NESDIS/ORA

NOAA MSU/AMSU Satellites


- Each satellite has a life cycle of a few years
- Each satellite overlaps With other satellites
- LECT gradually changes With time—orbital drift phenomenon
- Merging these satellites is a non-trivial task

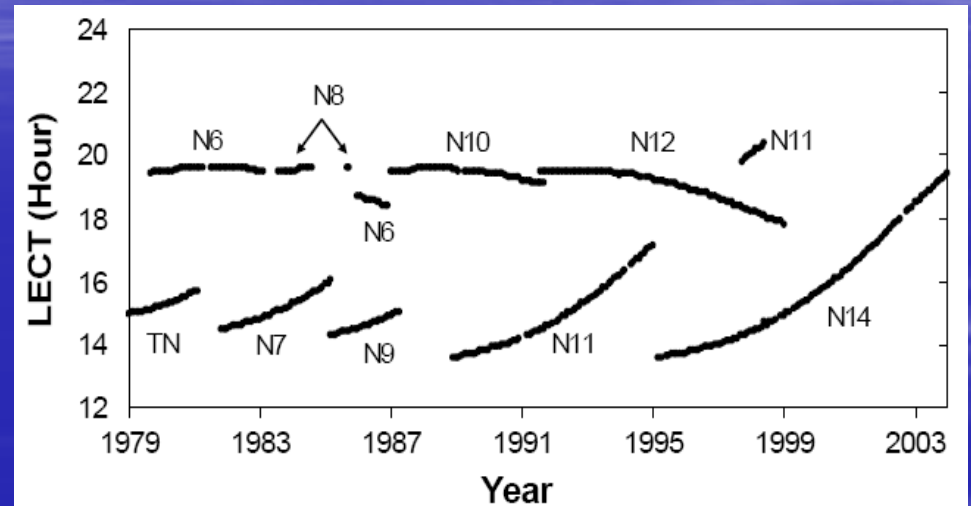

Satellite Local Equator Crossing Time (LECT) vs time

Past MSU CH 2 Trend Studies

- Spencer and Christy (1992): 0.02 K Dec⁻¹, 1979-1988
- Christy et al. (2003): 0.02 K Dec⁻¹, 1979-2002
- Prabhakara et al. (2000): 0.13 K Dec⁻¹, 1980-1999
- Mears et al. (2003, 2005): 0.10 K Dec⁻¹, 1979-2001
- Vinnikov and Grody (2003): 0.22-0.26 K Dec⁻¹, 1979-2002
- Grody et al. (2004) 0.17 K Dec⁻¹, 1979-2002
- Vinnikov et al. (2006): 0.20 K Dec⁻¹, 1978-2004

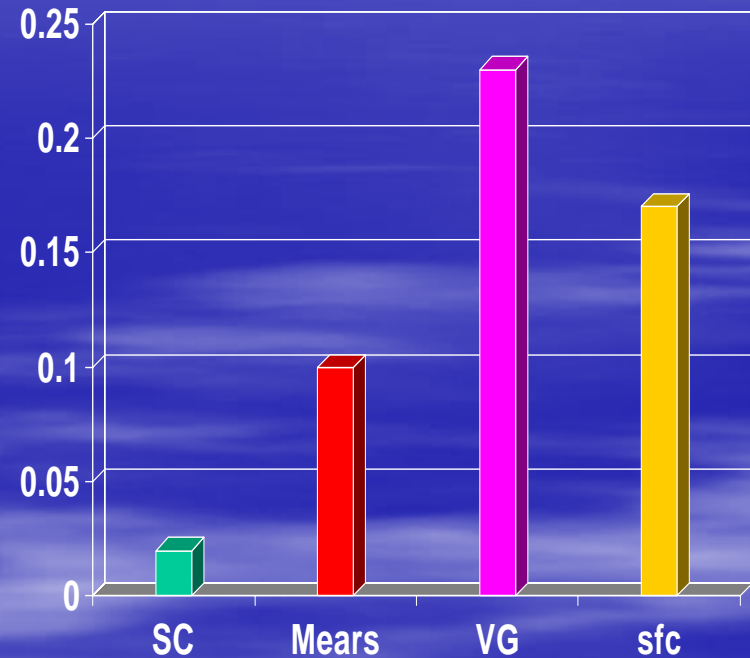

Fake Trend Problems

- Intersatellite Biases:




- 0.1K biases enough to lead different conclusion

- Warm target temperature Contamination

- Require brightness temperature not a function of warm target temperature

- Diurnal cycle effect


- Convert observations of different local time to a common time to remove diurnal cycle effect

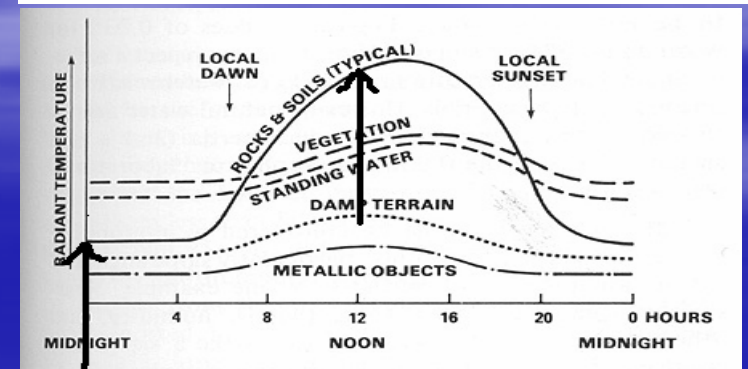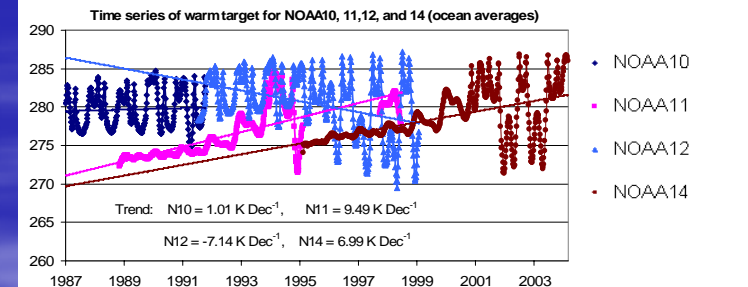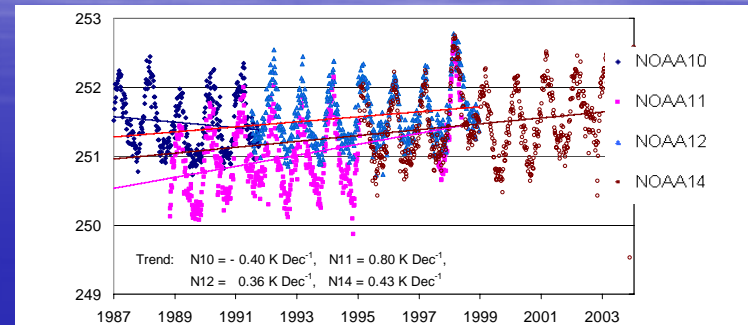

SNO Definition


Method to find SNO matchups:

- Use Cao's (2004) method to find the orbits that have intersections
- Use time and location information in the 1B file to determine simultaneity between two pixels

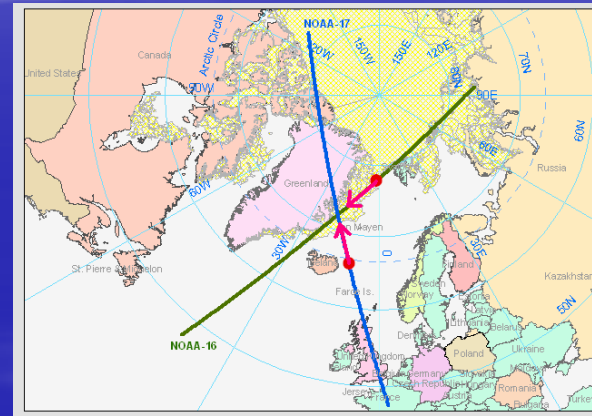

Schematic viewing the overpasses between two NOAA satellites

SNO Locations

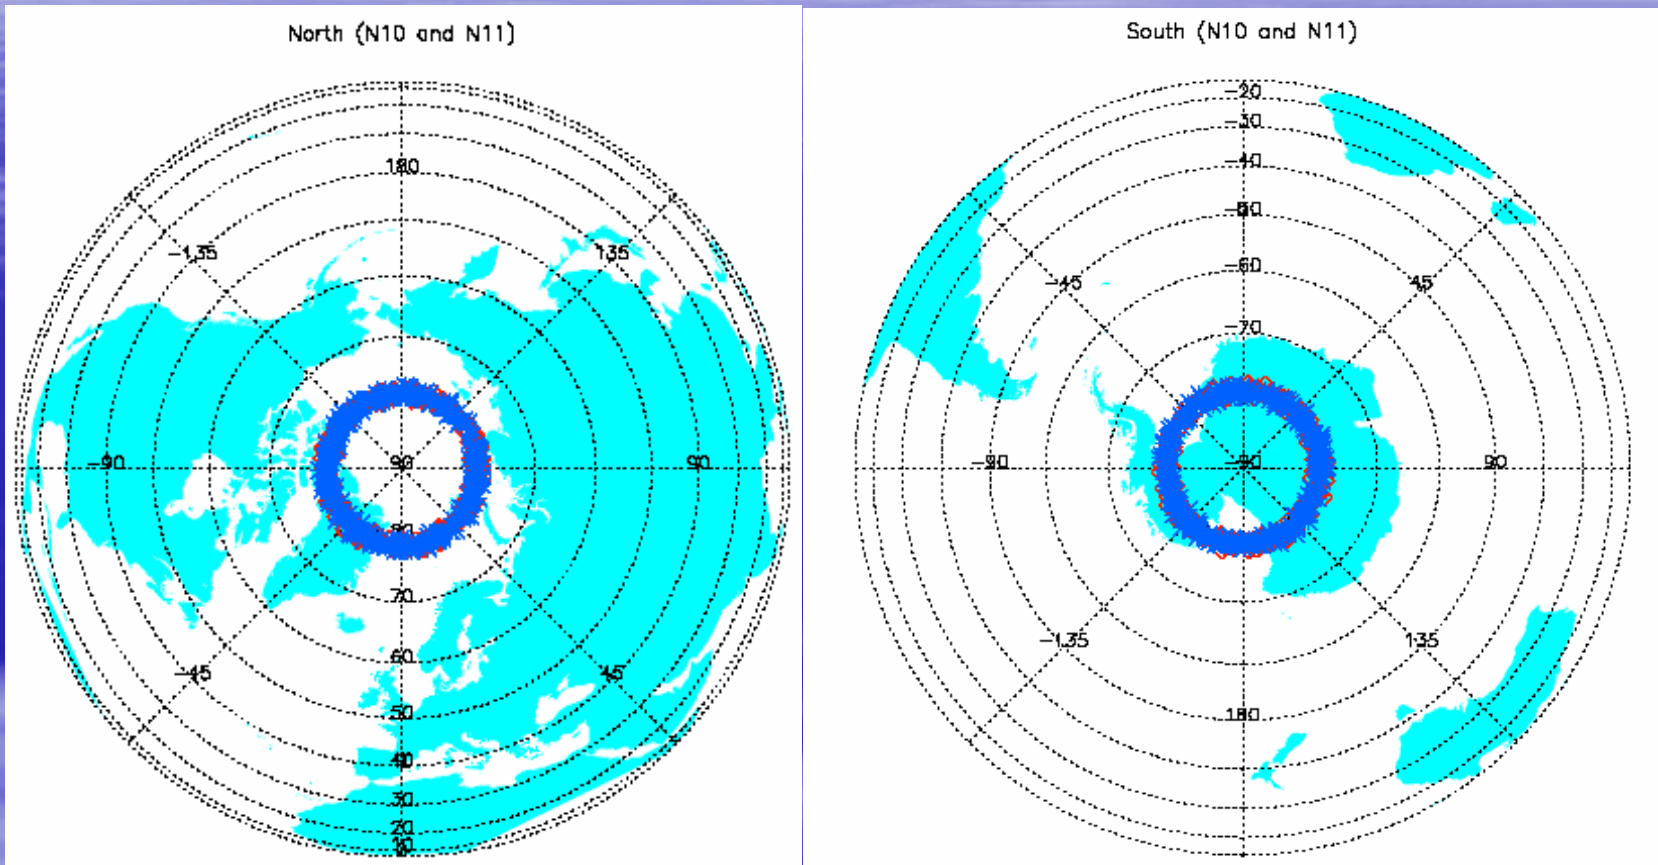


SNO Temperature range for CH. 2: 200-250 K
Global temperature range for CH. 2: 200-260 K


SNO Bias Characteristics



- T_b difference gets larger when the SNO pixel distance gets larger
- SNO numbers increase with the distance
- Different satellite pairs have different SNO numbers because of different overlap period

NOAA 9 and NOAA 10

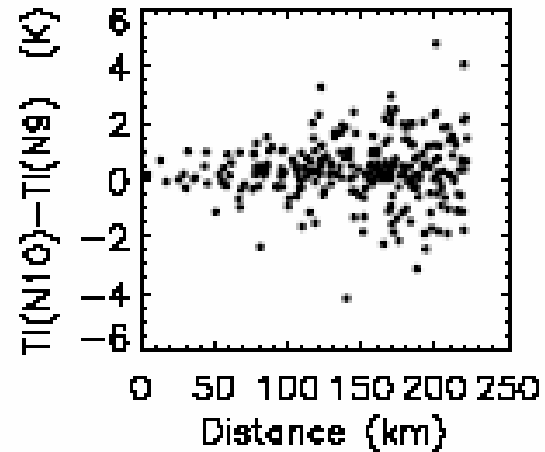


NOAA 10 and NOAA 11

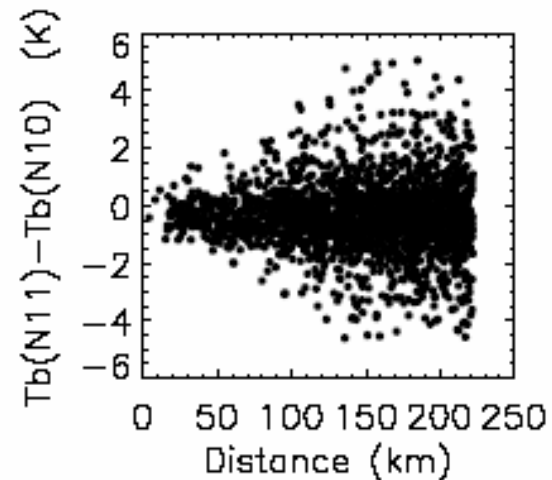

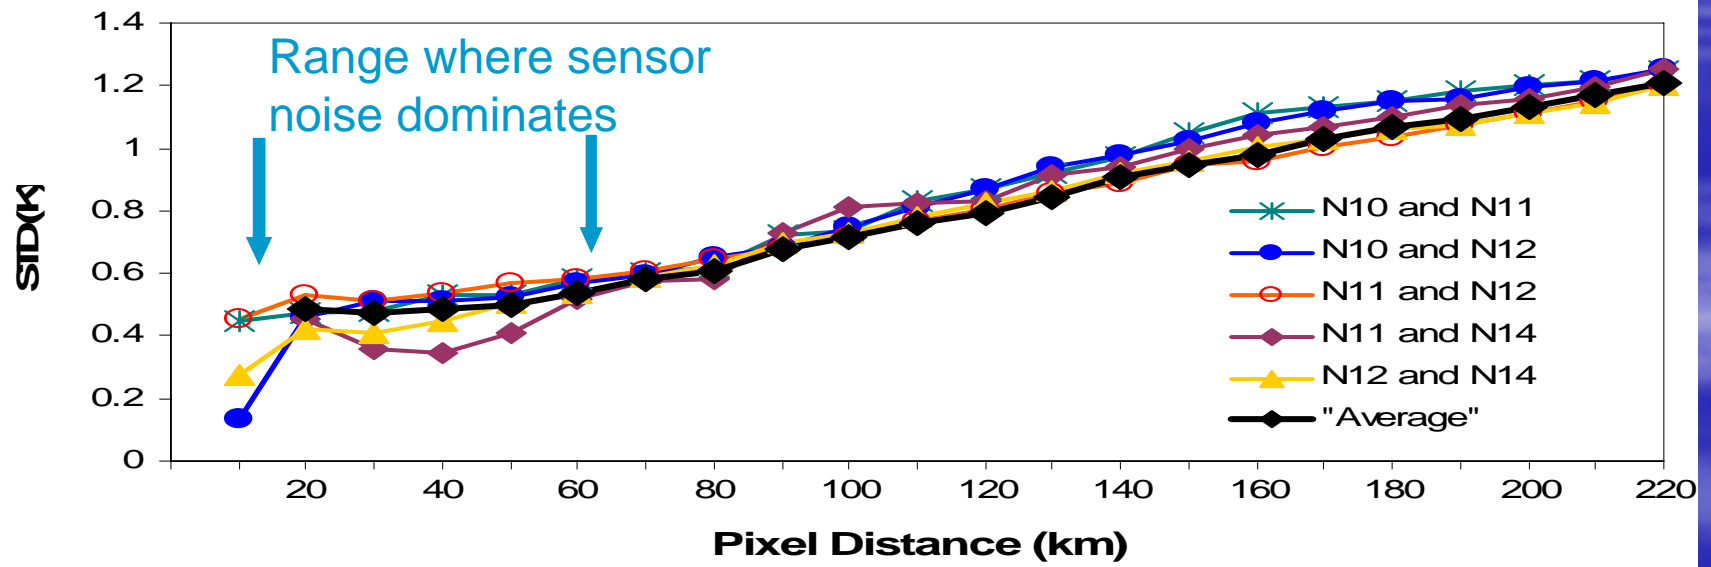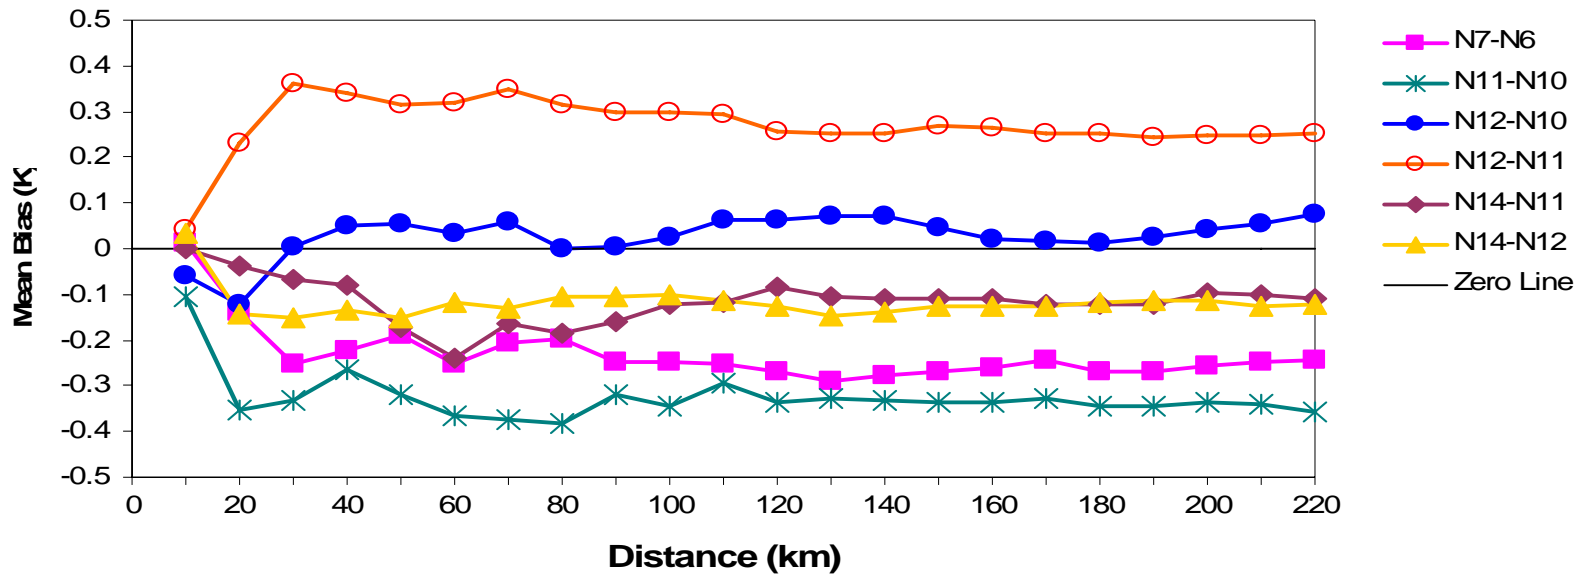

STD and biases of channel 2 brightness temperature differences between satellite pairs versus center distance of the nadir overpass pixels. (a) Biases (b) STD . Linear calibration algorithm at level 0 is used.


MSU In-Orbit Calibration Process




MSU Sensor



Cold Space
T=2.73K



Warm Target
Temperature is
measured by PRT



Earth

Conceptual diagram of MSU observational procedure

Level 0 Calibration Equation

Linear Calibration


$$R_L = R_c + S(C_e - C_c)$$

S → Slope

Nonlinear Calibration (Mo 1995)

$$R = R_L - \delta R + \mu Z$$


$$Z = S^2 (C_e - C_c)(C_e - C_w)$$

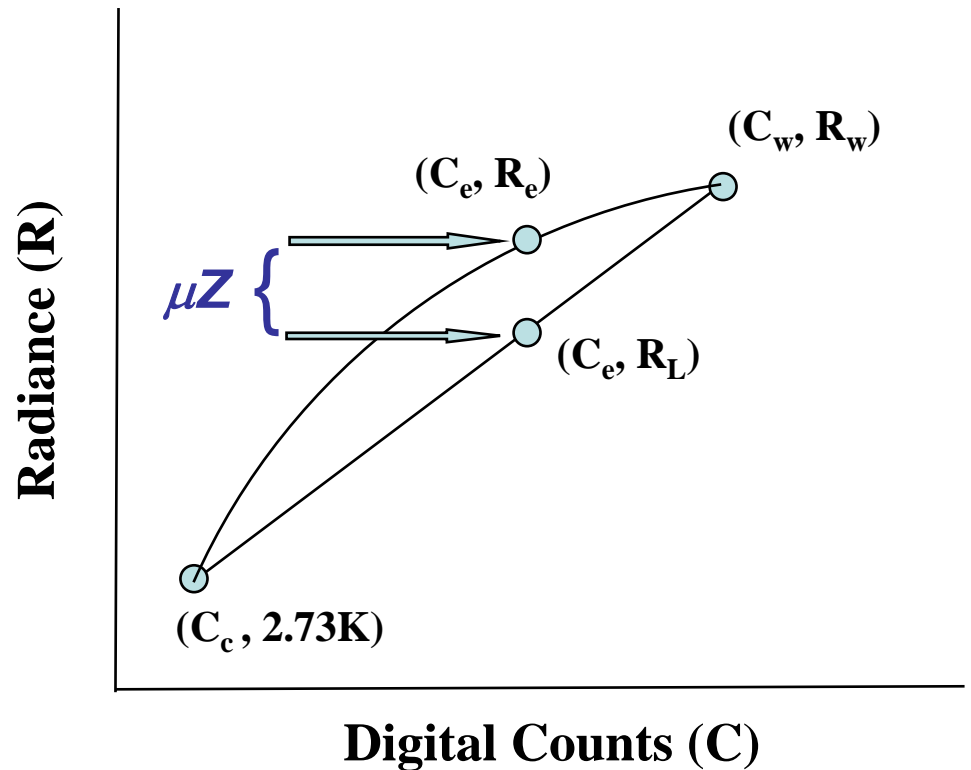

SNO Radiance Error Model

$$R_k = R_{L,k} - \delta R_k + \mu_k Z_k$$



$$R_j = R_{L,j} - \delta R_j + \mu_j Z_j$$



**Radiance Error Model for SNO Matchup
K and J :**


$$\Delta R = \Delta R_L - \Delta \delta R + \mu_k Z_k - \mu_j Z_j$$

$$Z_j = \beta Z_k + \alpha$$

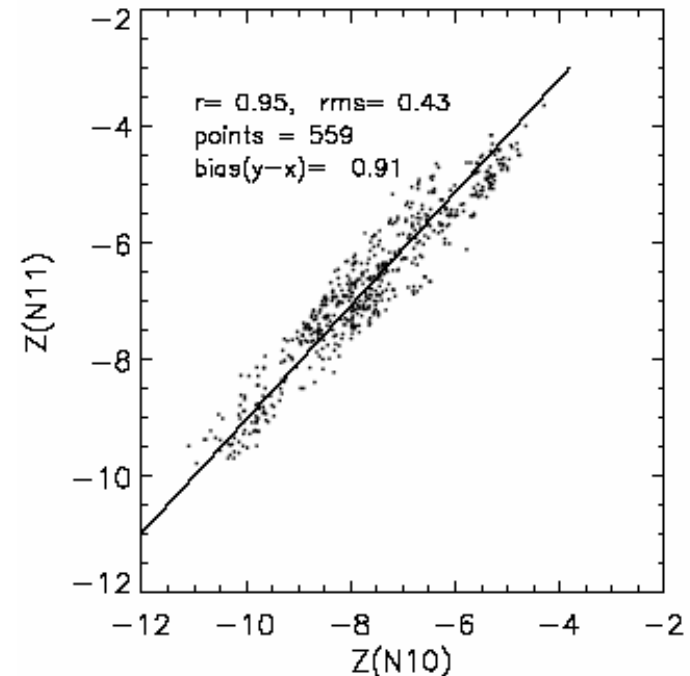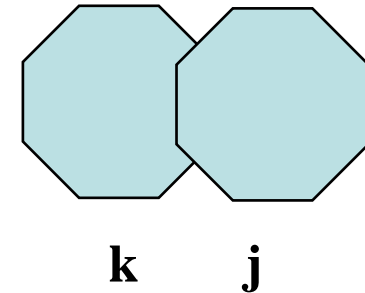


SNO Nonlinear Calibration— Bias Removal

Linear Calibration

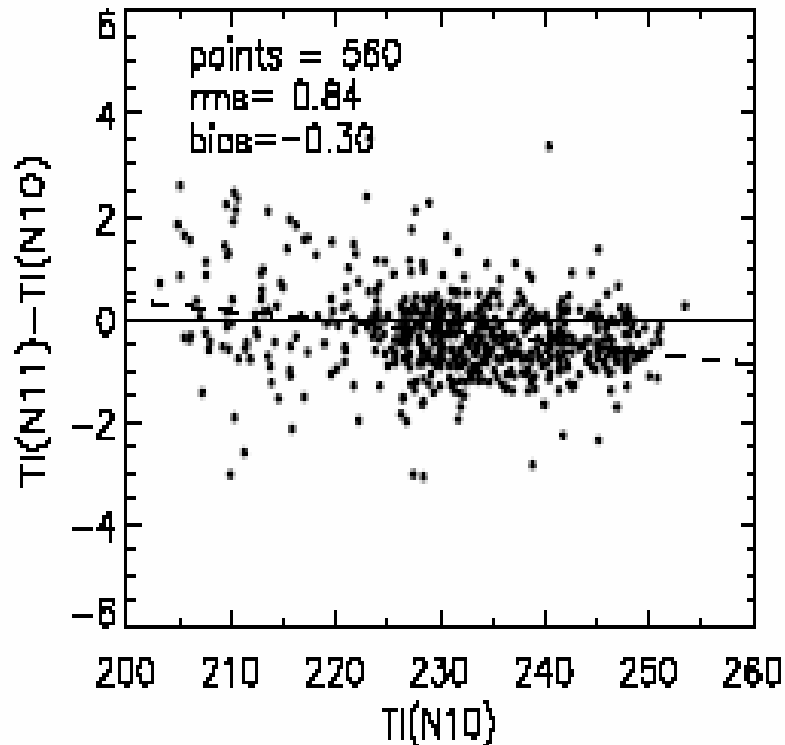

Nonlinear calibration using SNO

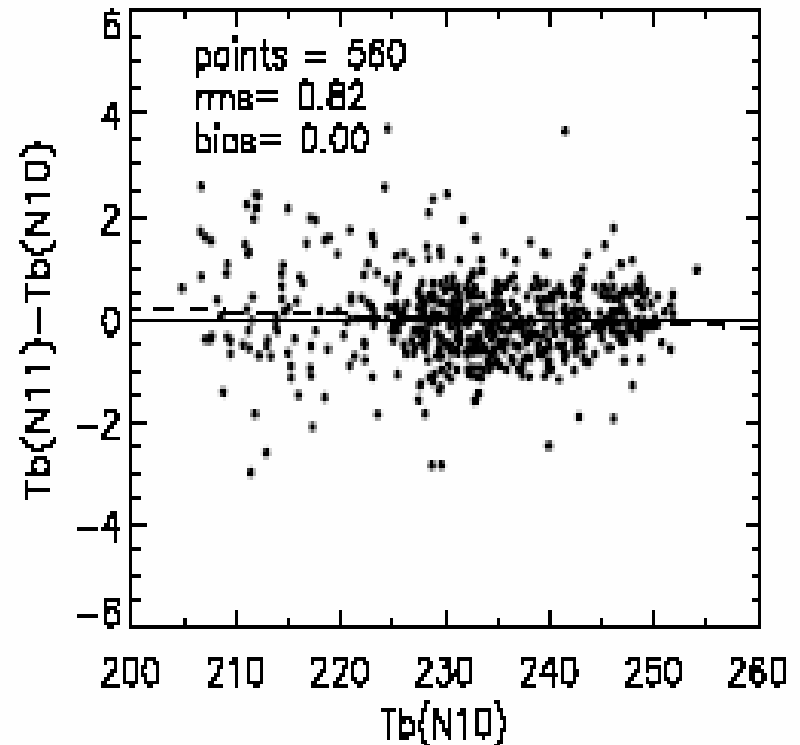

Scatter plots showing effects of the nonlinear calibration on the error statistics and distribution of the brightness temperature differences between NOAA 10 and NOAA 11.


SNO Sequential Calibration Procedure

- Assuming NOAA 10 as the reference satellite and using its pre-launch coefficient for reference
- Obtain calibrated radiance (1b) for NOAA 10
- Compute NOAA 11 coefficients from regressions of N11-N10 SNO
- Obtain calibrated radiance (1b) for NOAA 11
- Repeat above procedure for NOAA 12 with calibrated NOAA 11 as references


.....

Effect on time series and trend


- Intersatellite biases largely reduced
- Trend values are more reliable

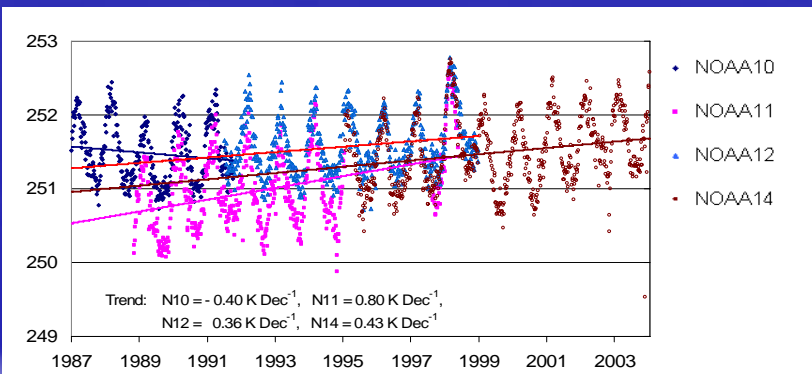


**NESDIS
Operational
Calibration**
 0.22 K Dec^{-1}

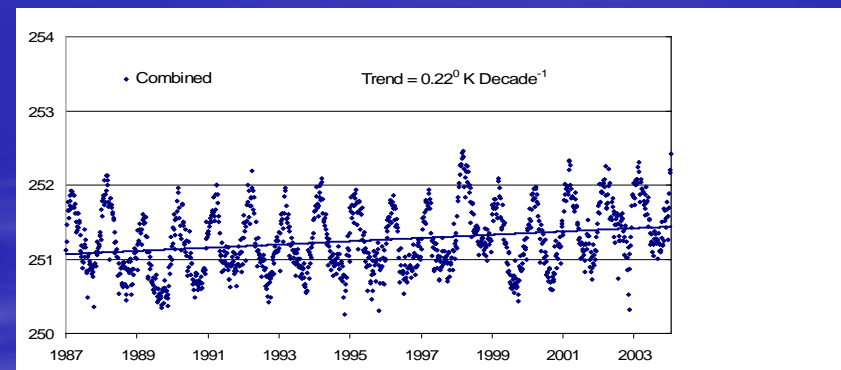

(Vinnikov and Grody, 2003)

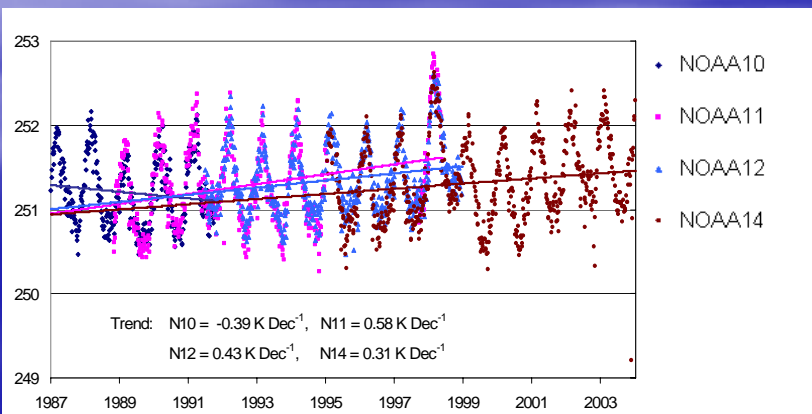


**SNO
calibration**
 0.17 K Dec^{-1}

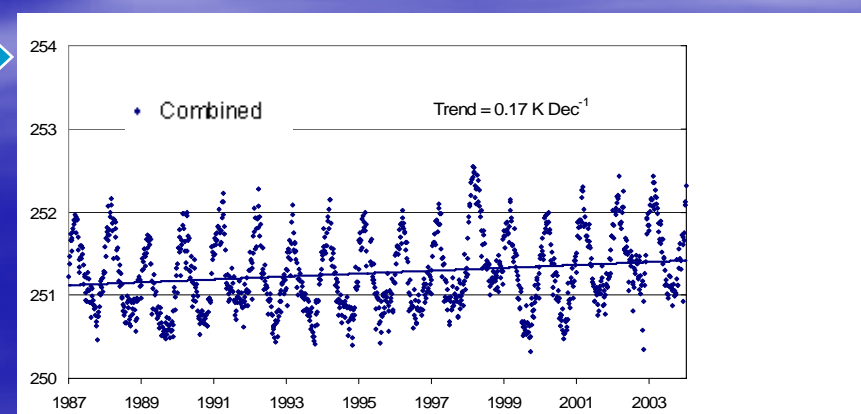


Spatial Distribution of Biases

- Ocean OK
- Land needs diurnal cycle corrections

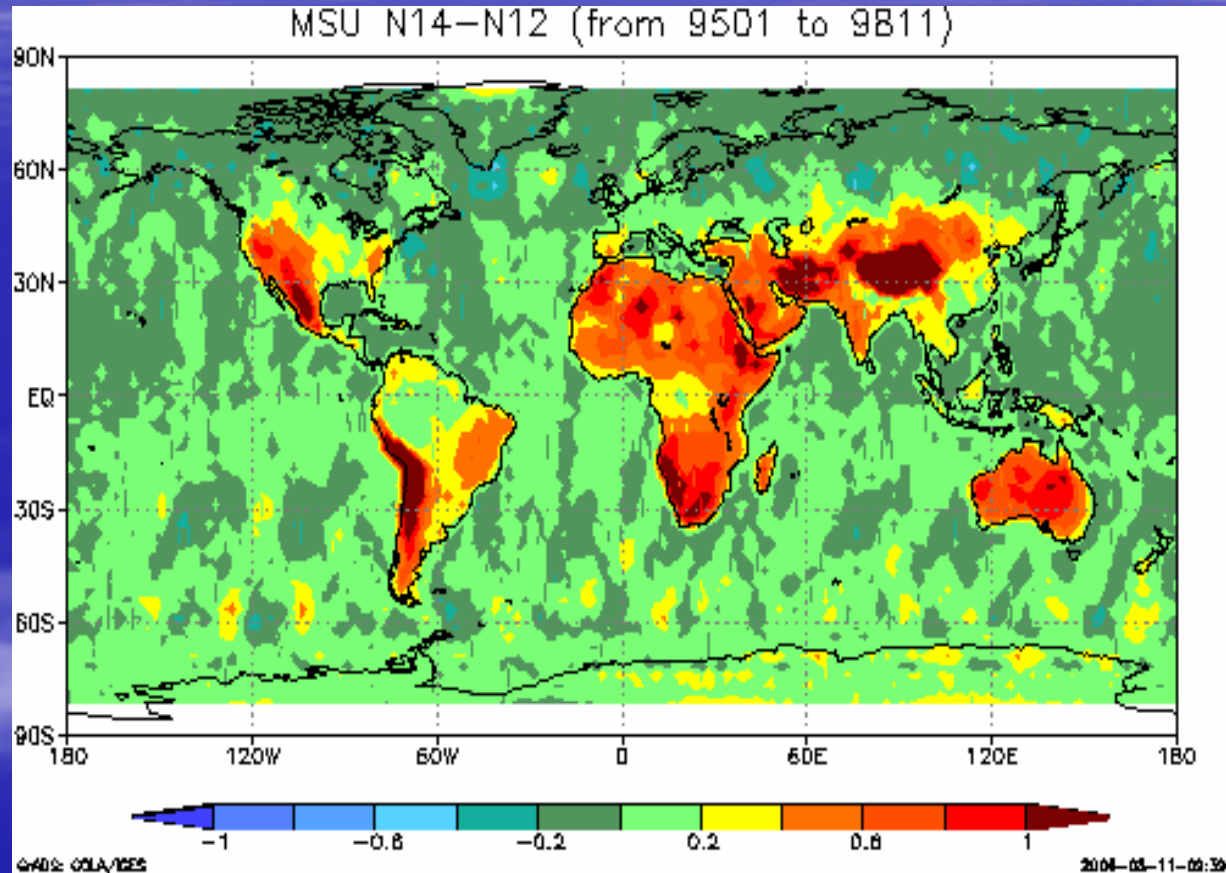

Warm Target Contamination

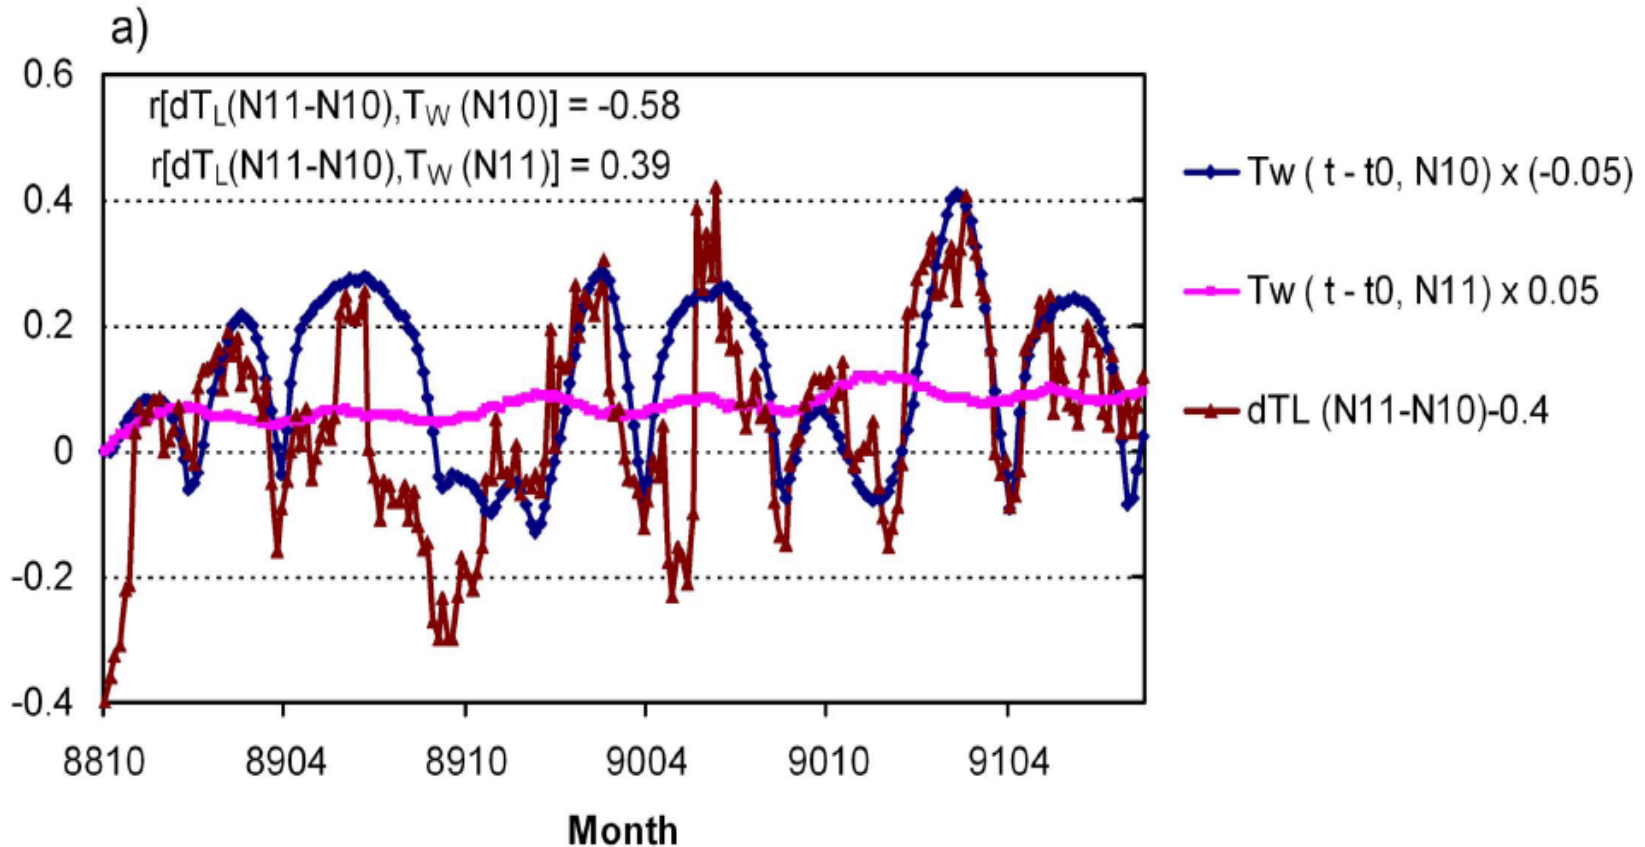


Brown Line: T_b differences between NOAA 10 and 11

Blue Line: T_w of NOAA 10

Pink Line: T_w of NOAA 11


Determine Absolute Calibration by Removing T_w Contamination

- μ_{N10} small or large, large warm target temperature contamination
- When μ_{N10} is 25% larger than its pre-launch value, averaged warm target temperature contamination reaches a minimum (4%)
- Corresponding trend is $0.198 \pm 0.02 \text{ K Dec}^{-1}$
- Degree of freedom about 30, correlation is significant at 95% when $r^2 > 13\%$

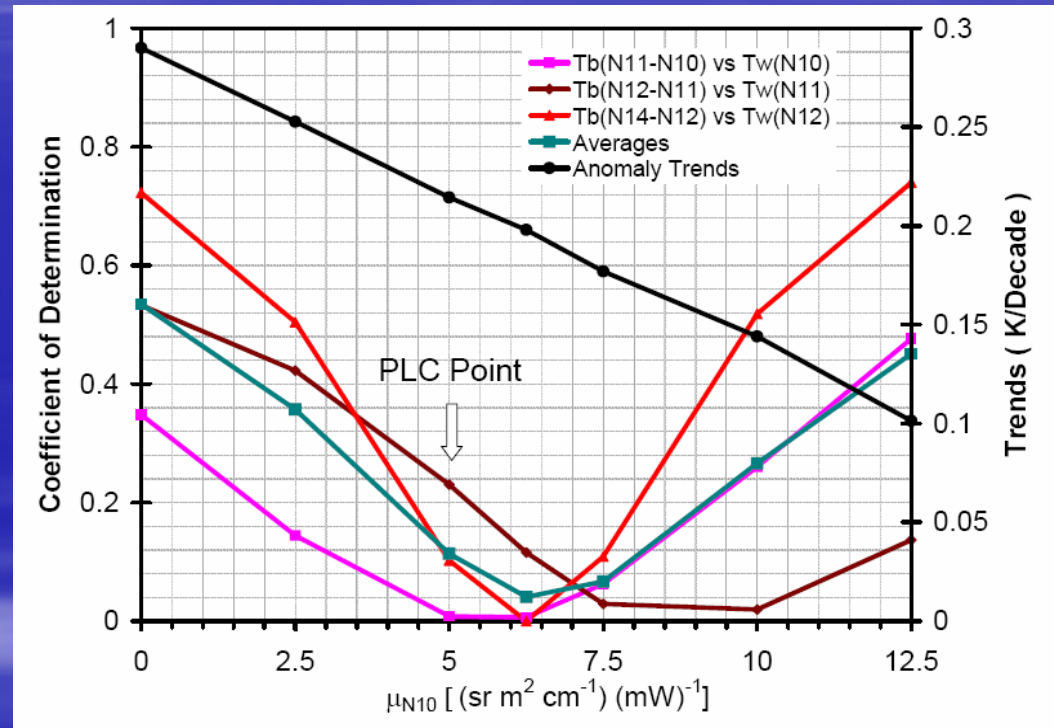

Summary on SNO Calibration


- Post-launch coefficients larger than Pre-launch values

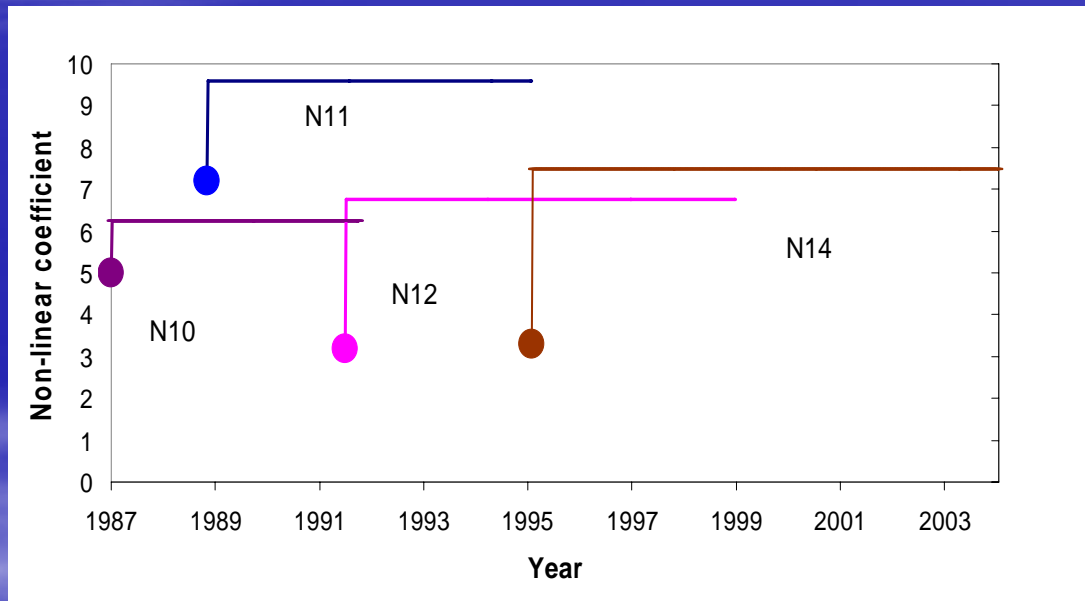


Dots: Pre-launch values
Line: SNO calibration values.

Spatial Distribution of Trend

MSU Channel 2 TB Trend(from 1987 - 2003)


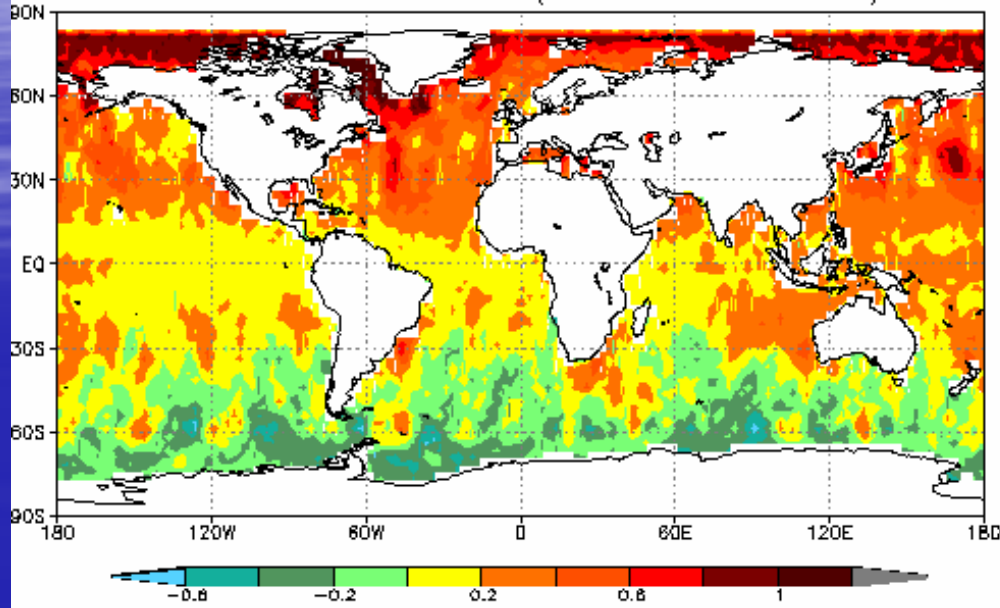


ARCTIC SEA ICE EXTENT - SEPTEMBER TREND,
1978-2005
(http://nsidc.org/news/press/20050928_trends_fig1.html)

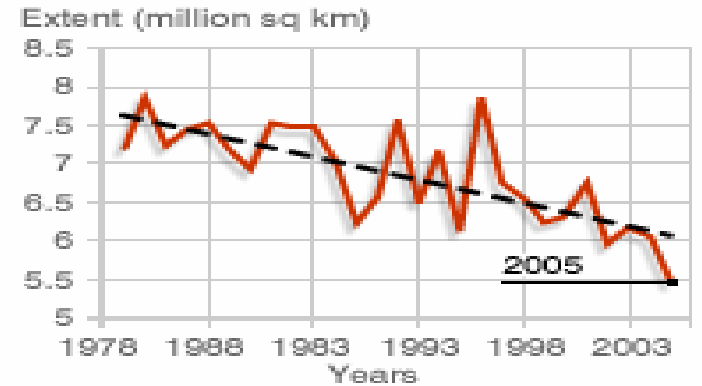

SOURCE: National Snow and Ice Data Center (NSIDC)

Global Ocean Zonal Mean Trend (1987-2003)

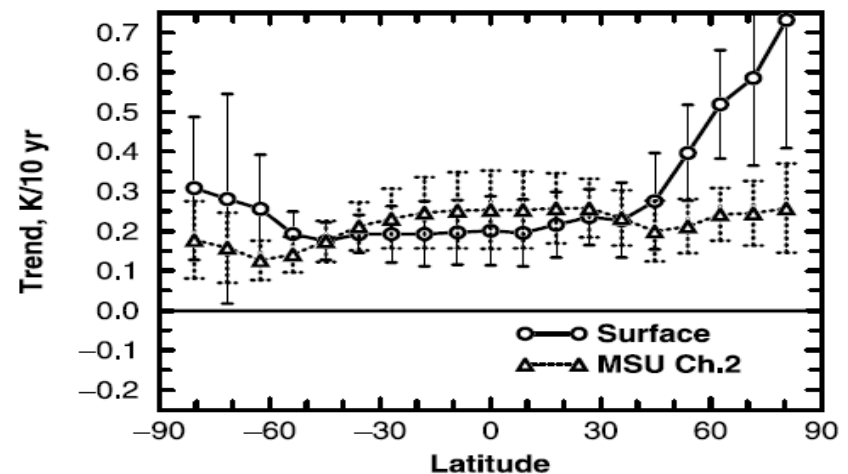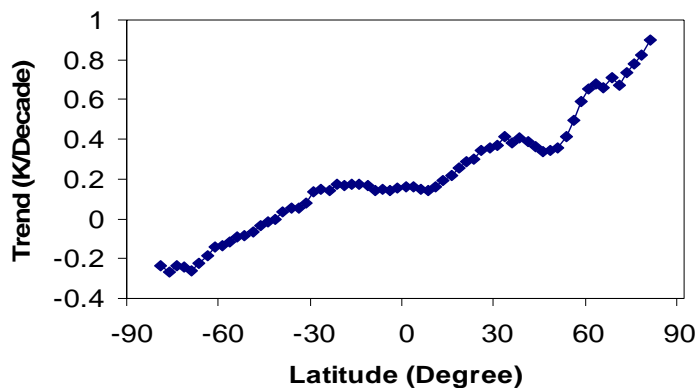

On-going Work and Future Plans

- Diurnal cycle corrections
 - land problems
- Recalibrate and Reprocess all MSU satellites
 - TIROS-N to NOAA 14, for all channels 2,3,4
- Connect MSU with AMSU
 - Consider different pixel resolutions and frequencies
- Impact on Reanalyses
 - Assimilate SNO calibrated MSU/AMSU 1b to next generation reanalyses
 - affect trend of all reanalysis variables
 - diurnal cycle problem resolved
- Compare with other data
 - Radiosonde (Tony Reale)
 - GPS Radio Occultation (Ben Ho, Bill Kuo)
- Other instruments
 - SSM/I and SSMIS (Weng)

Reference and Website

- Zou, C., M. Goldberg, Z. Cheng, N. Grody, J. Sullivan, C. Cao, and D. Tarpley (2006): Recalibration of Microwave Sounding Unit for climate studies using simultaneous nadir overpasses, *J. Geophys. Res.*, 111, doi: 10.1029/2005JD006798
- <http://www.orbit.nesdis.noaa.gov/smcd/emb/mscat/mscatmain.htm>

International TOVS Study Conference, 15th, ITSC-15, Maratea, Italy, 4-10 October 2006
Madison, WI, University of Wisconsin-Madison, Space Science and Engineering Center,
Cooperative Institute for Meteorological Satellite Studies, 2006.