

Operational Processing of ATOVS data at the Satellite Application Facility on Climate Monitoring

Nathalie Selbach, Petra Fuchs and Theo Steenbergen


Deutscher Wetterdienst (DWD), Offenbach, Germany




Introduction


The major objective of the Satellite Application Facility on Climate Monitoring (CM-SAF) is the exploitation of satellite observations to derive information on key climate variables of the Earth system. The CM-SAF focuses on the atmospheric part of the Essential Climate Variables defined within the framework of the Global Climate Observing System (GCOS). The products cover different cloud, radiation and humidity parameters, which are derived from different operational satellite and sensor types. Daily and monthly mean products of different humidity and temperature variables are derived operationally from ATOVS data at the CM-SAF


Product definition



Daily and monthly mean products are available on a (90 km)² sinusoidal global grid. For each variable the mean value, error statistics and number of observations are given.







Example for October 2004:

- a) Monthly average total precipitable water (TPW) from ATOVS in kg/m²
- b) Extra daily standard deviation in kg/m²
- c) Number of observations per grid.


Methods

The CM-SAF operationally applies the International ATOVS Processing Package (IAPP, Li et al., 2000), v2.1, to retrieve humidity and temperature profiles from ATOVS observations onboard NOAA-15, NOAA-16, and NOAA-18. The full information from HIRS 3/4, AMSU-A and AMSU-B/MHS is used for the retrieval. Furthermore, the profiles are vertically integrated and averaged to provide column integrated water vapor as well as humidity and temperature values for 5 layers and 6 levels. A Kriging routine (Lindau and Schulz, 2004) is applied to determine daily and monthly averages on a global grid from the swath based retrievals. Climate Data Records (CDRs) from 2004 to present (ongoing) are available for the different temperature and humidity variables.

The products are generated using the following input data:


- ATOVS Level 1c data from NOAA 15, NOAA16 and NOAA 18 (data from NOAA 17 cannot be used after a failure in AMSU-A)
- 3-hourly initialized analysis of the GME model on model levels (currently 40 levels, Majewski et al., 2002)
- Background data (e.g., topography) as provided in IAPP

Quality control tools



An IDL-based tool for operational quality monitoring of the routine processing of the ATOVS based products is available.

Schematic of operational processing

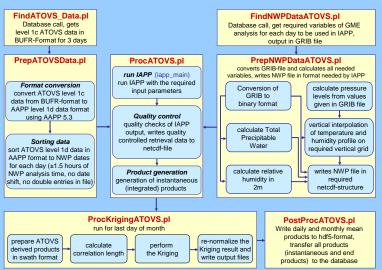

Processing routine is run once per month on an IBM P5-575 system (8 processors) running AIX 5.3.

Known shortcomings of the CDRs

Discontinuities in time series have different reasons, e.g.:

- Data from different sensors are not inter-calibrated:
- Discontinuities in time series with change in satellite combination
- Retrievals used for mean product calculated from different sensors
- >The retrieval is dependent on NWP data as first guess. Currently the operational NWP model GME from DWD is used, but CM-SAF has no influence on changes in model configuration
- >ATOVS Level 1c data used as input; CM-SAF has no influence on changes in, e.g., calibration coefficients

Plans for future ATOVS processing at CM-SAF

Several changes and updates are planned for the (near) future:

- > Implementation of IAPP V3 in operational processing environment at CM-SAF, a Beta-release of the software package is available.
- ➤ Inclusion of ATOVS data from Metop in the operational processing
- > Re-processing of the time series and extension backwards using (inter-) calibrated satellite data (Generation of Environmental Data Records)

CM-SAF services

All products are available via our Web User Interface (www.cmsaf.eu) Data are provided via different media (FTP, CD, DVD,...). Quick-looks of all products will be available on the CM-SAF webpage in the near future.

Li, J., W. Wolf, W. P. Menzel, W. Zhang, H.-L. Huang, and T. H. Achtor, 2000: Global soundings of the atmosphere from ATOVS measurements: The algorithm and validation. J. Appl. Meteor., 39, 1248-1268.

Lindau, R., J. Schulz, 2004: Gridding/merging techniques for the humidity composite product of the CM-SAF. Proceedings of the 2004 EUMETSAT Satellite Conference, Prague, Czech Republic, EUM P41, 519-526.

Majewski, D., D. Liermann, P. Prohl, B. Ritter, M. Buchhold, T. Hanisch, G. Paul, W. Wergen and J. Baumgardner, 2002: The operational global icosahedral-hexagonal grid point model GME: Description and high resolution tests. Mon. Wea. Rev., 130, 319-338.

International TOVS Study Conference, 16th, ITSC-16, Angra dos Reis, Brazil, 7-13 May 2008. Madison, WI, University of Wisconsin-Madison, Space Science and Engineering Center, Cooperative Institute for Meteorological Satellite Studies, 2008.