


Estimation of the carbon balance components of heterogeneous agricultural landscape using tall tower based and remotely sensed data



Barcza, Z.¹, Gelybó, Gy.¹, Kern, A.^{1,2}, Kljun, N.³, Haszpra, L.

¹ Department of Meteorology, Eötvös Loránd University, H-1117 Budapest, Pázmány P. sétány 1/A, Hungary
² Adaptation to Climate Change Research Group, Hungarian Academy of Sciences, H-1117 Budapest, Pázmány P. sétány 1/A, Hungary
³ Department of Geography, Swansea University, Singleton Park, Swansea SA2 8PP, United Kingdom
⁴ Hungarian Meteorological Service, H-1675 Budapest, P.O.Box 39, Hungary

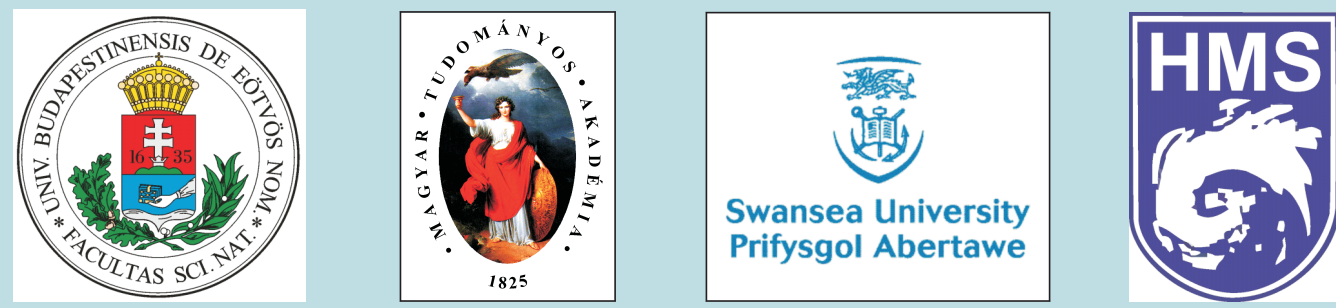

Using the combination of remotely sensed data, flux tower measurements and state-of-the-art footprint model, we estimate ecosystem productivity of heterogeneous agricultural landscape in Hungary. Gross Primary Production (GPP) estimation using remotely sensed data is based on the MOD17 GPP model. The results are compared to flux tower measurements. In order to utilize footprint information obtained with 250 m spatial resolution, the relatively coarse 1 km resolution MOD17 model is scaled down using NDVI data (MOD13).

Measurements

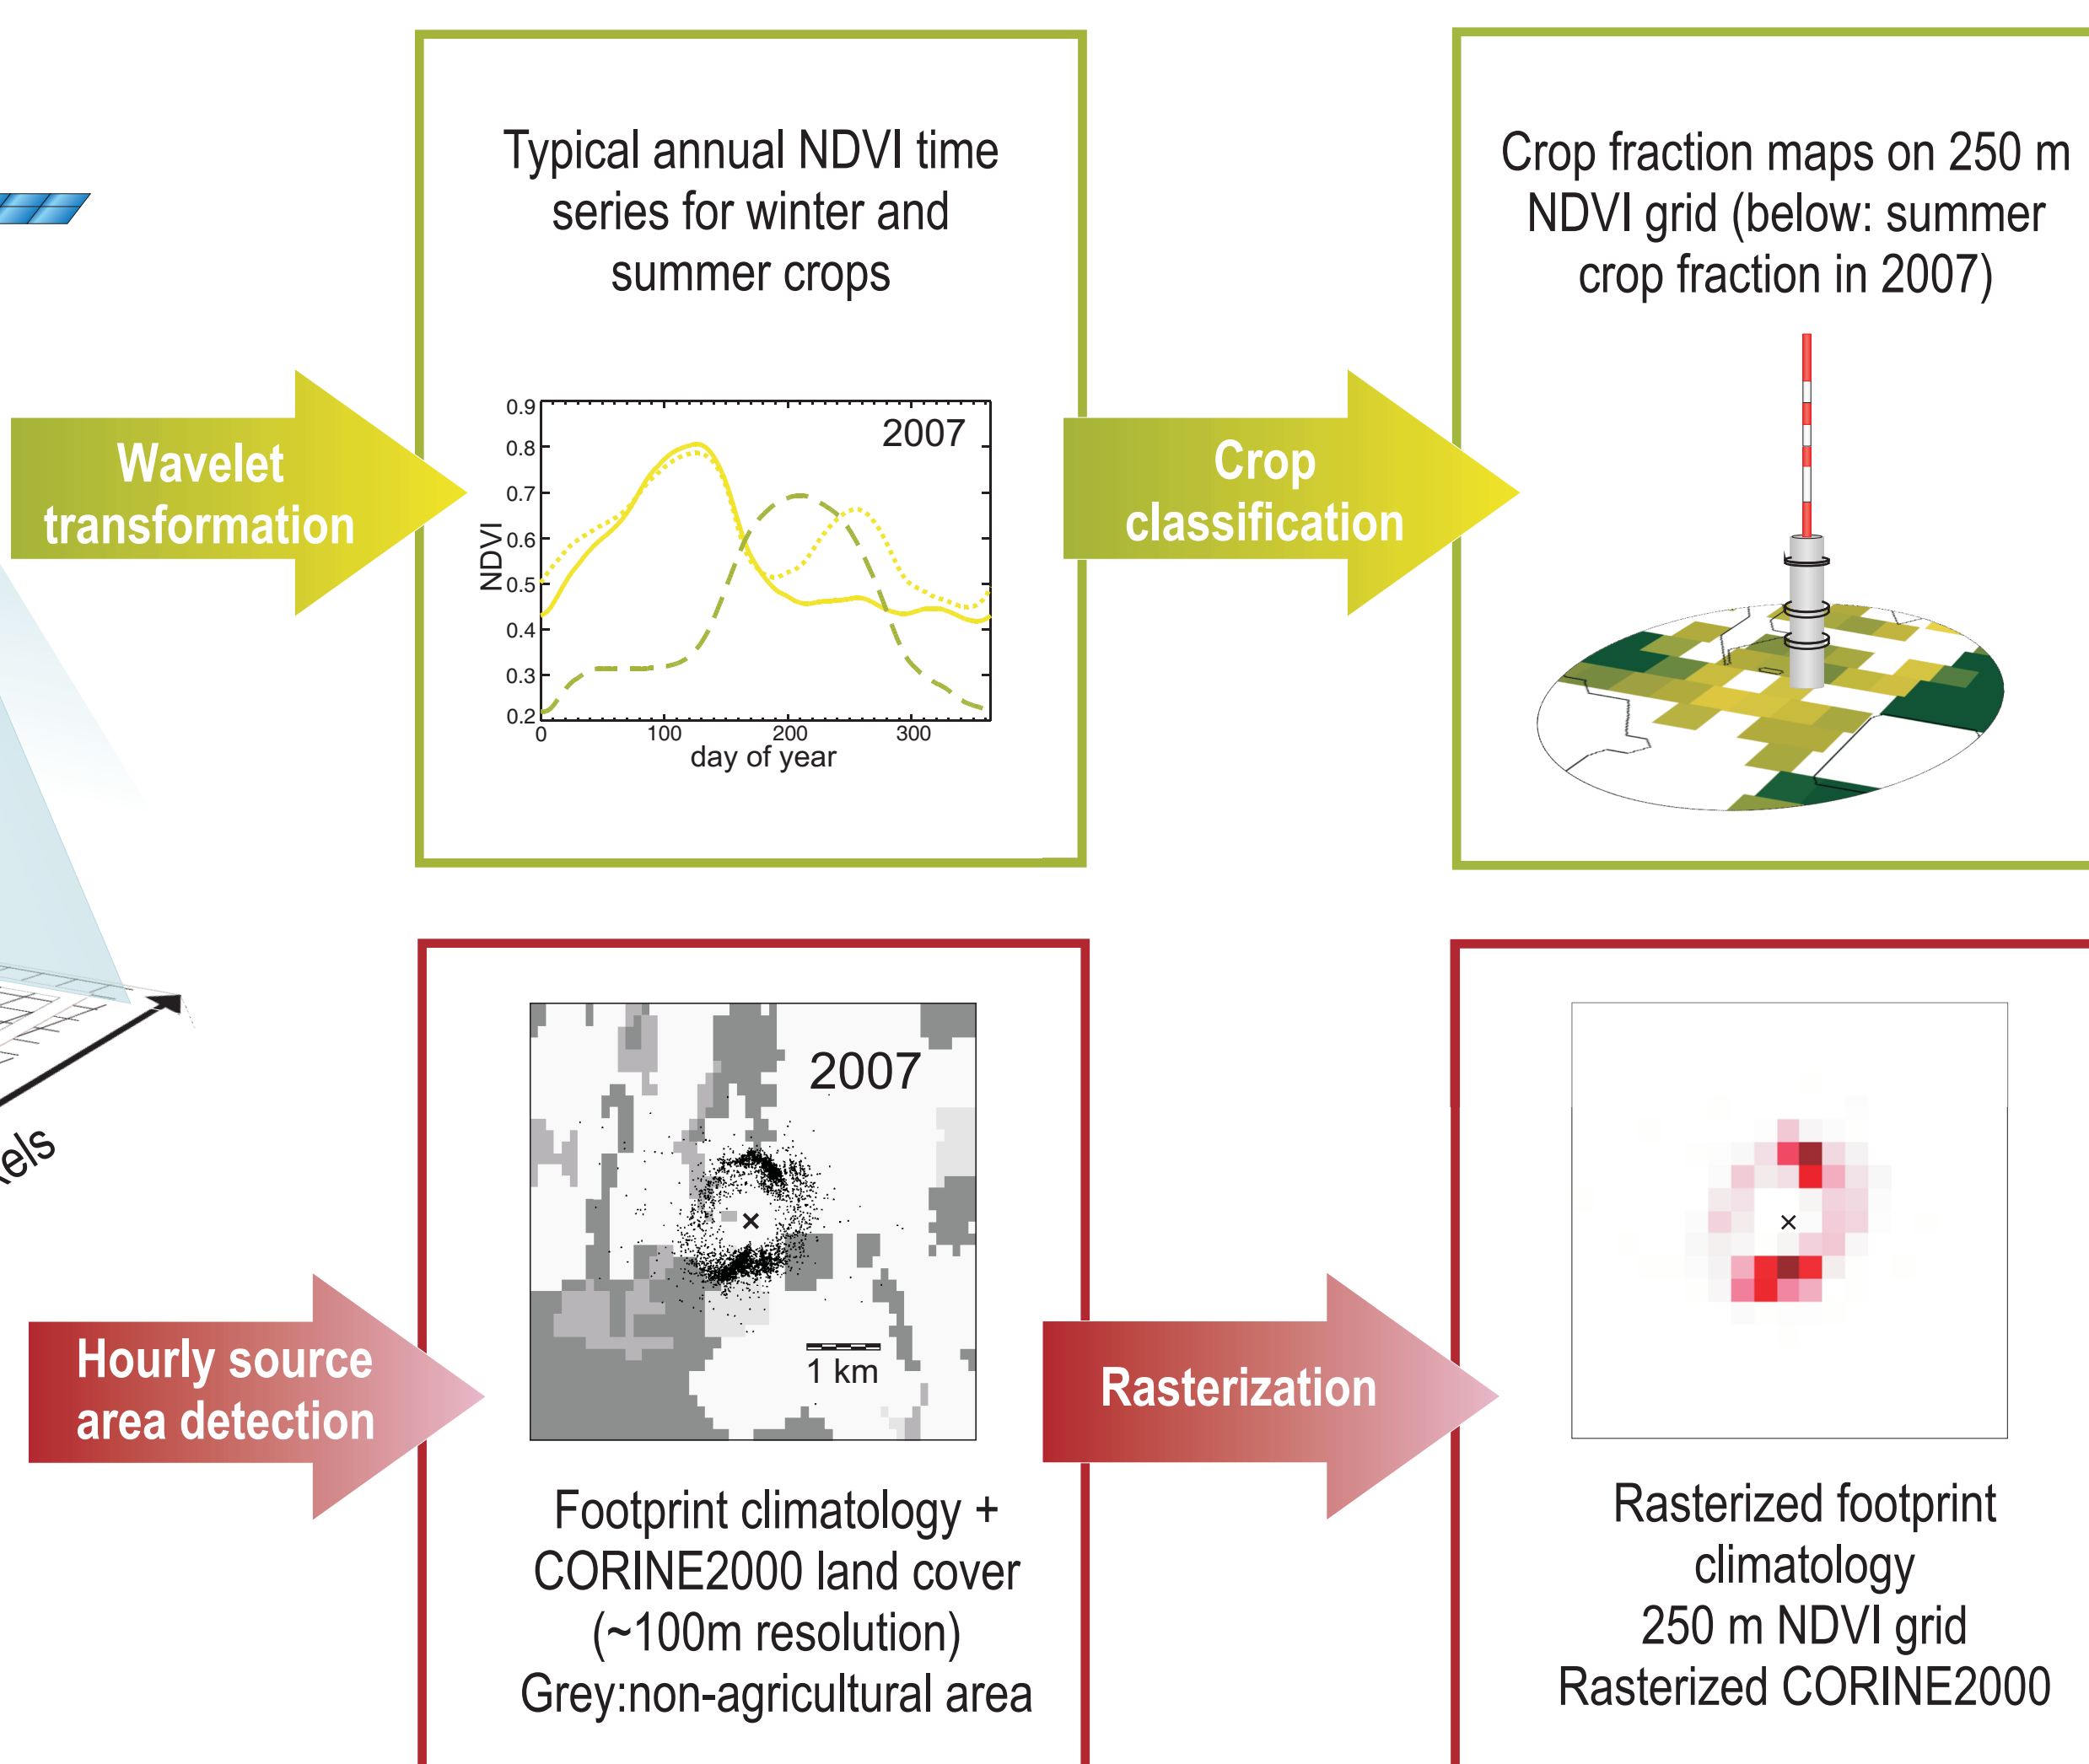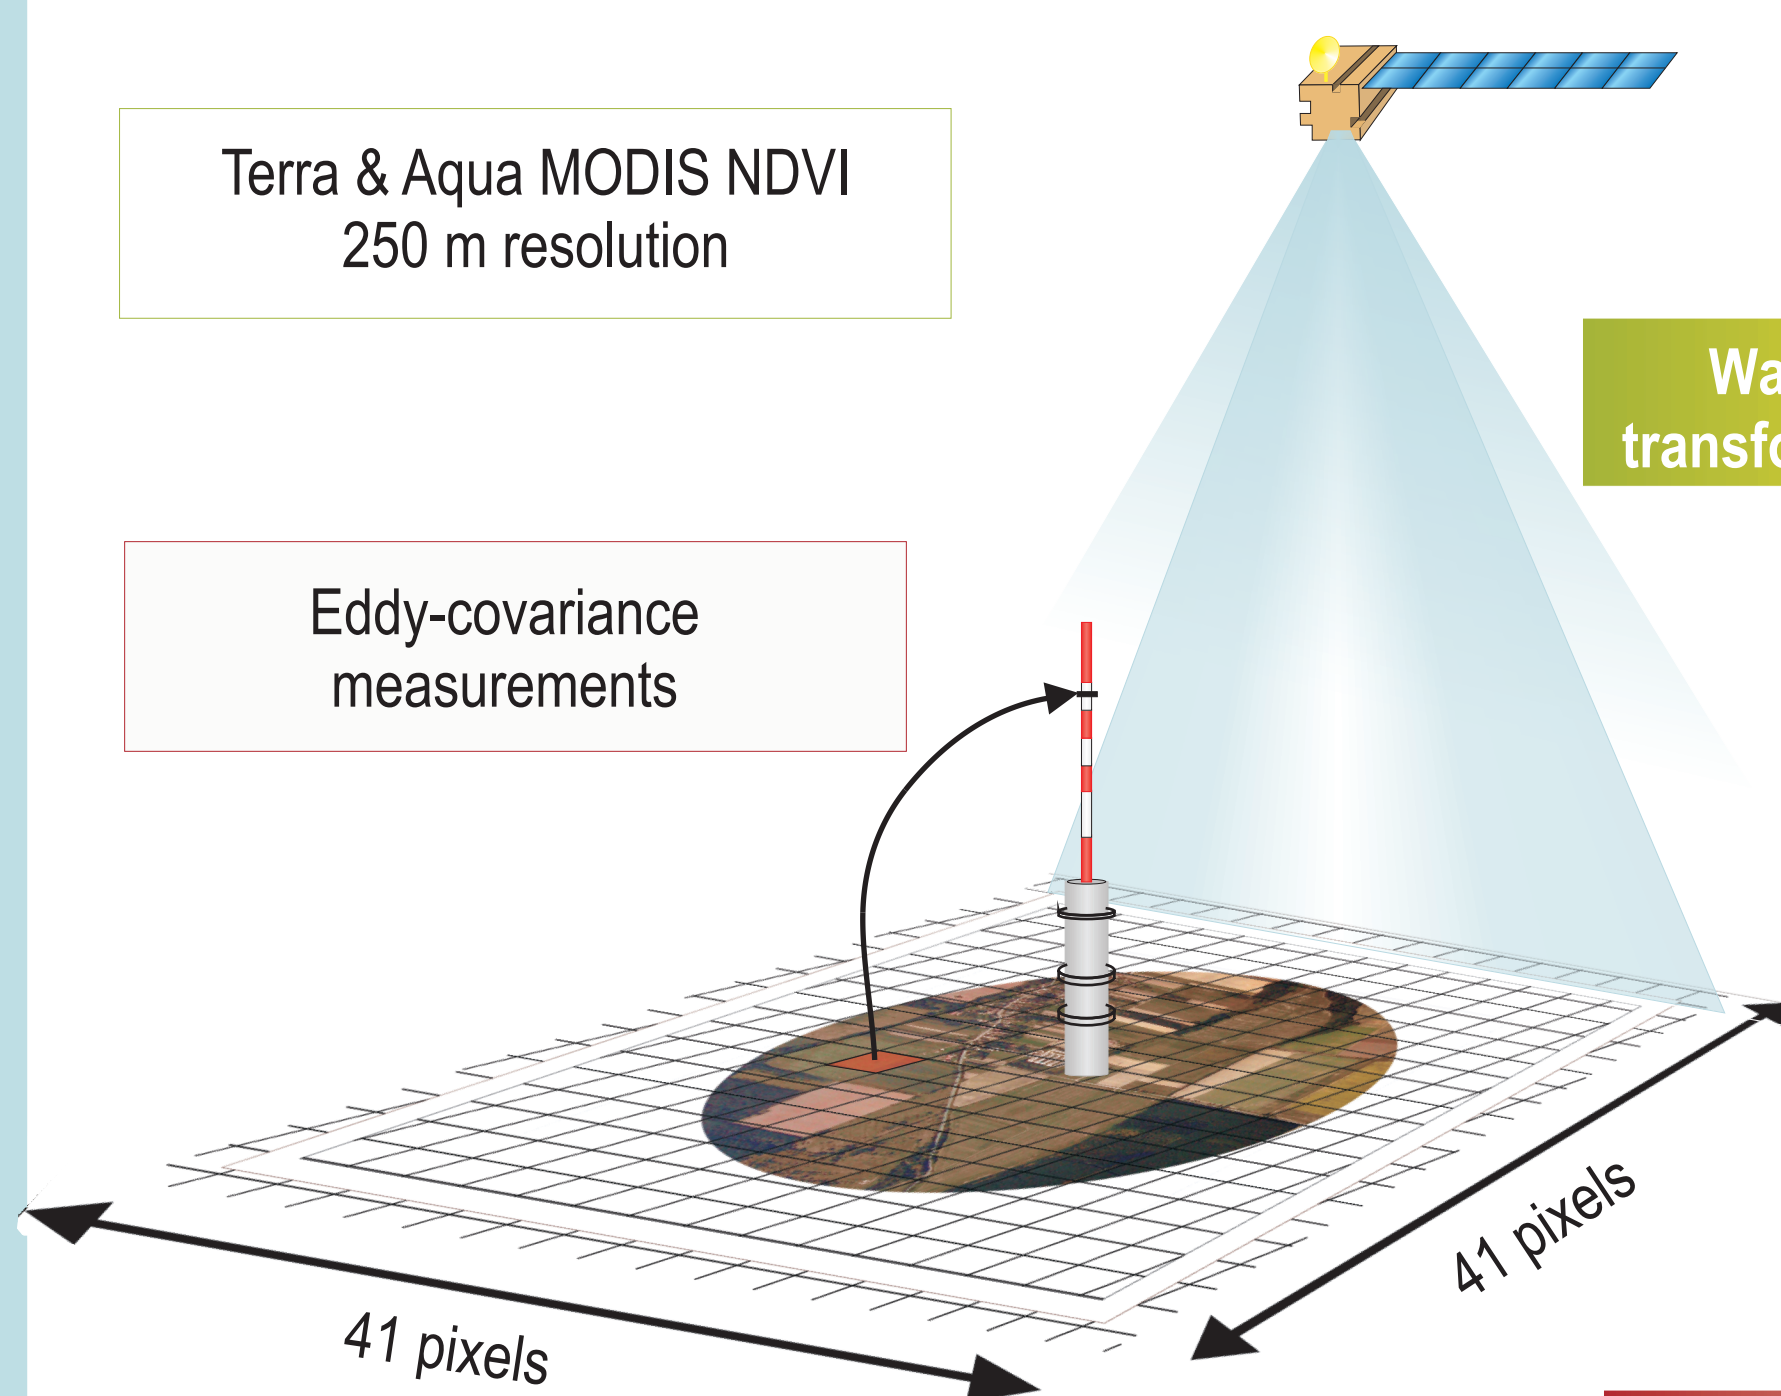

Retrieved information on common grid

- MOD17 model
- 250 m resolution FPAR
- 250 m resolution crop map
- Dynamic simulation of tall tower EC measurements
- 250 m resolution footprint
- 250 m resolution land cover
- Crop specific fluxes

Synthesizing ground based and remotely sensed data over heterogeneous agricultural land. The 250 m resolution is comparable with individual field size. The cutout represents 41x41 pixels that covers the sampled area.


NDVI signal processing for crop classification. Determining representativeness of ground based measurements.

Retrieve land cover, crop type and footprint information on the same common (NDVI 250m) grid for modeling.

Kljun et al., 2004
Barcza et al., 2009

MOD17 1km resolution


Official

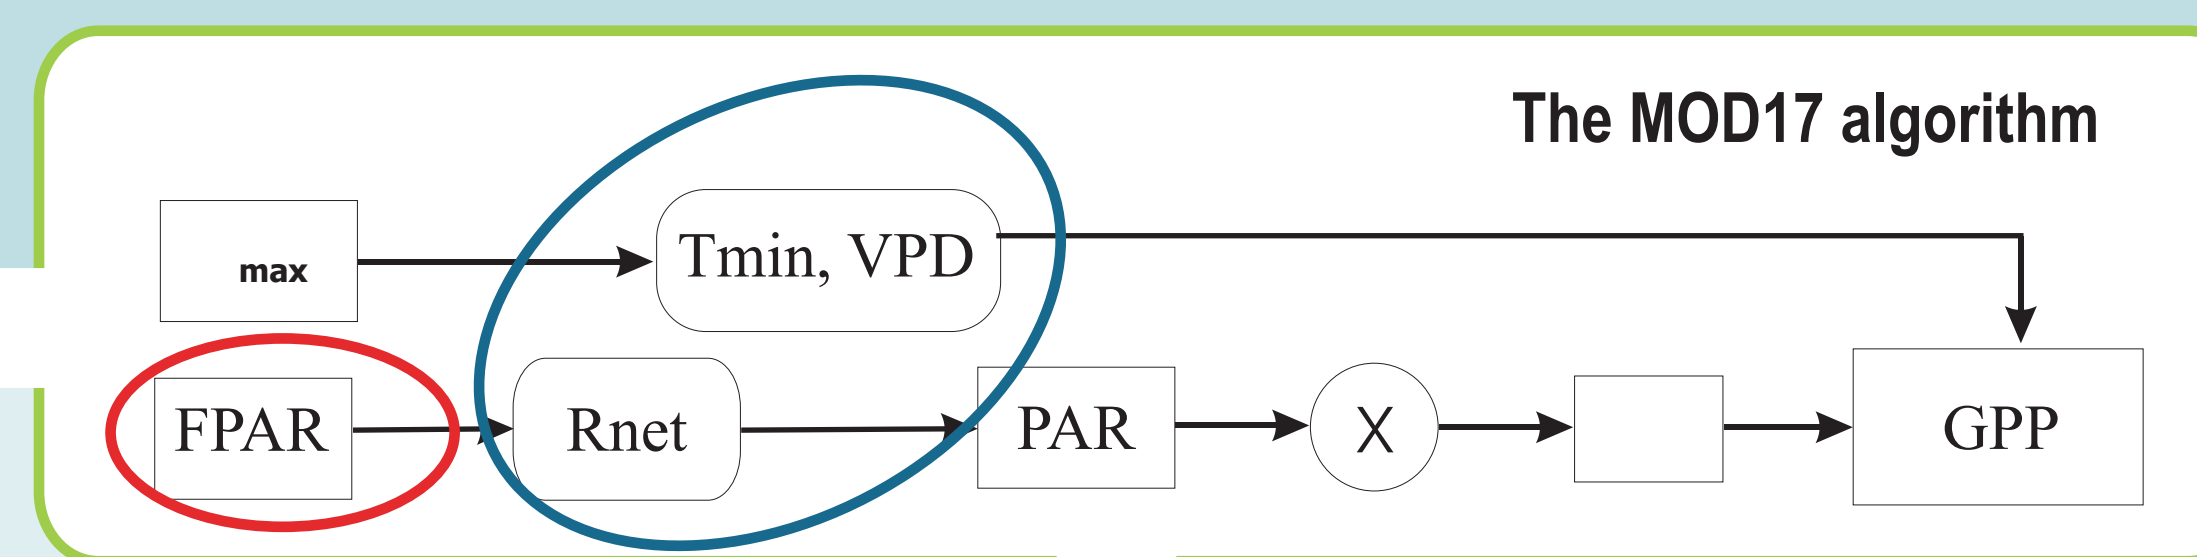


FPAR

NDVI based downscaling of MOD17


FPAR quality control and interpolation. Figure shows FRAP time series before and after the procedure

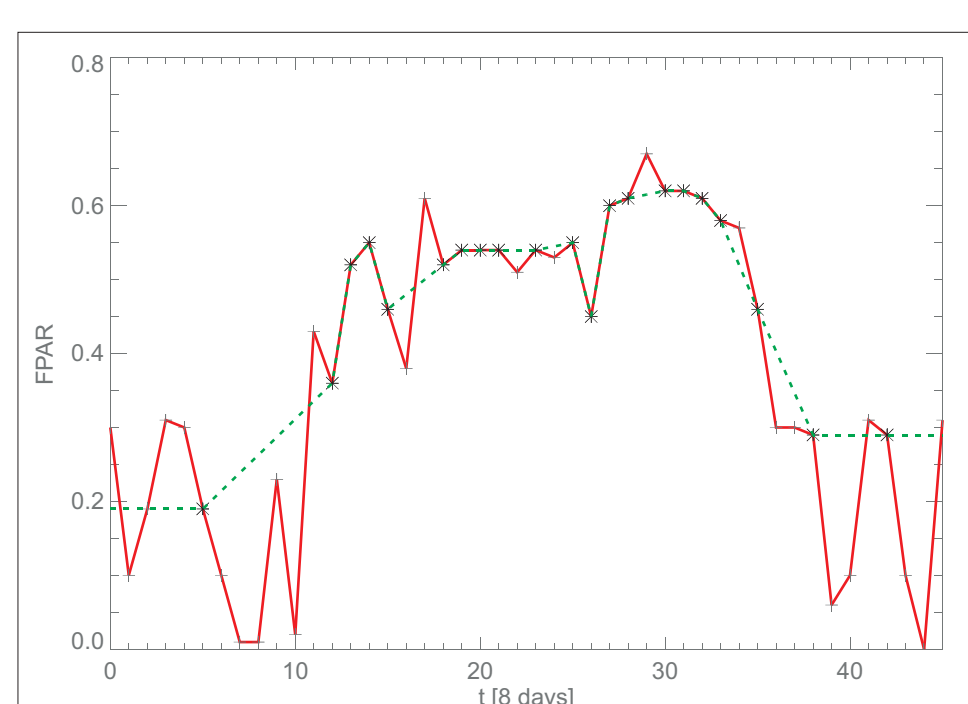

MOD17 tower meteorology

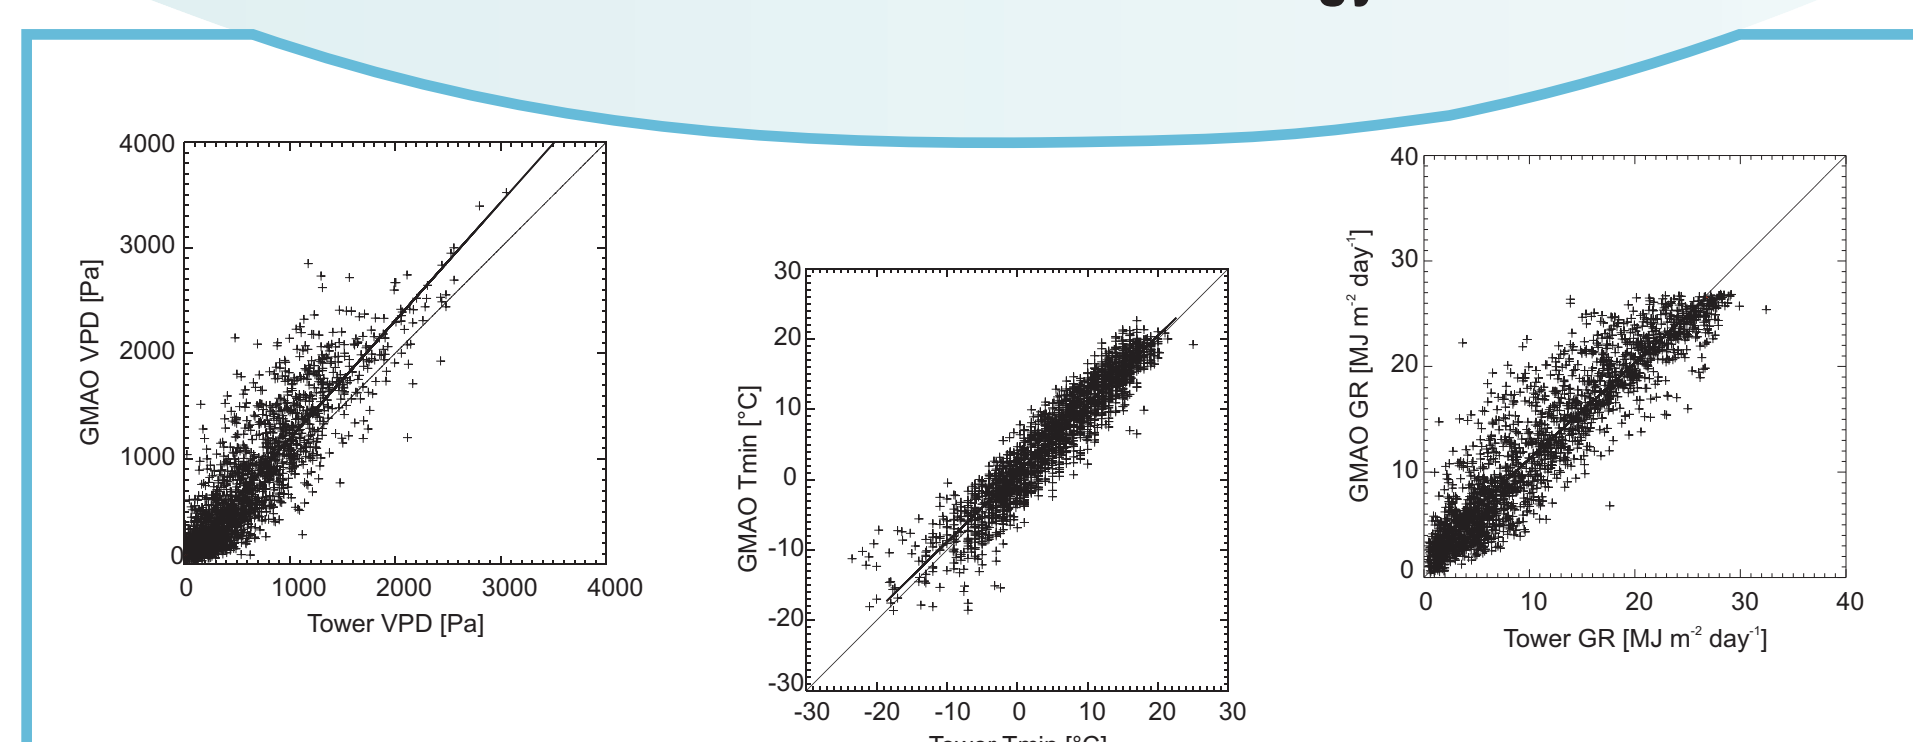

Six-years-long relationship between local measurements and the GMAO data. Note that GMAO accuracy varies between years, as well.

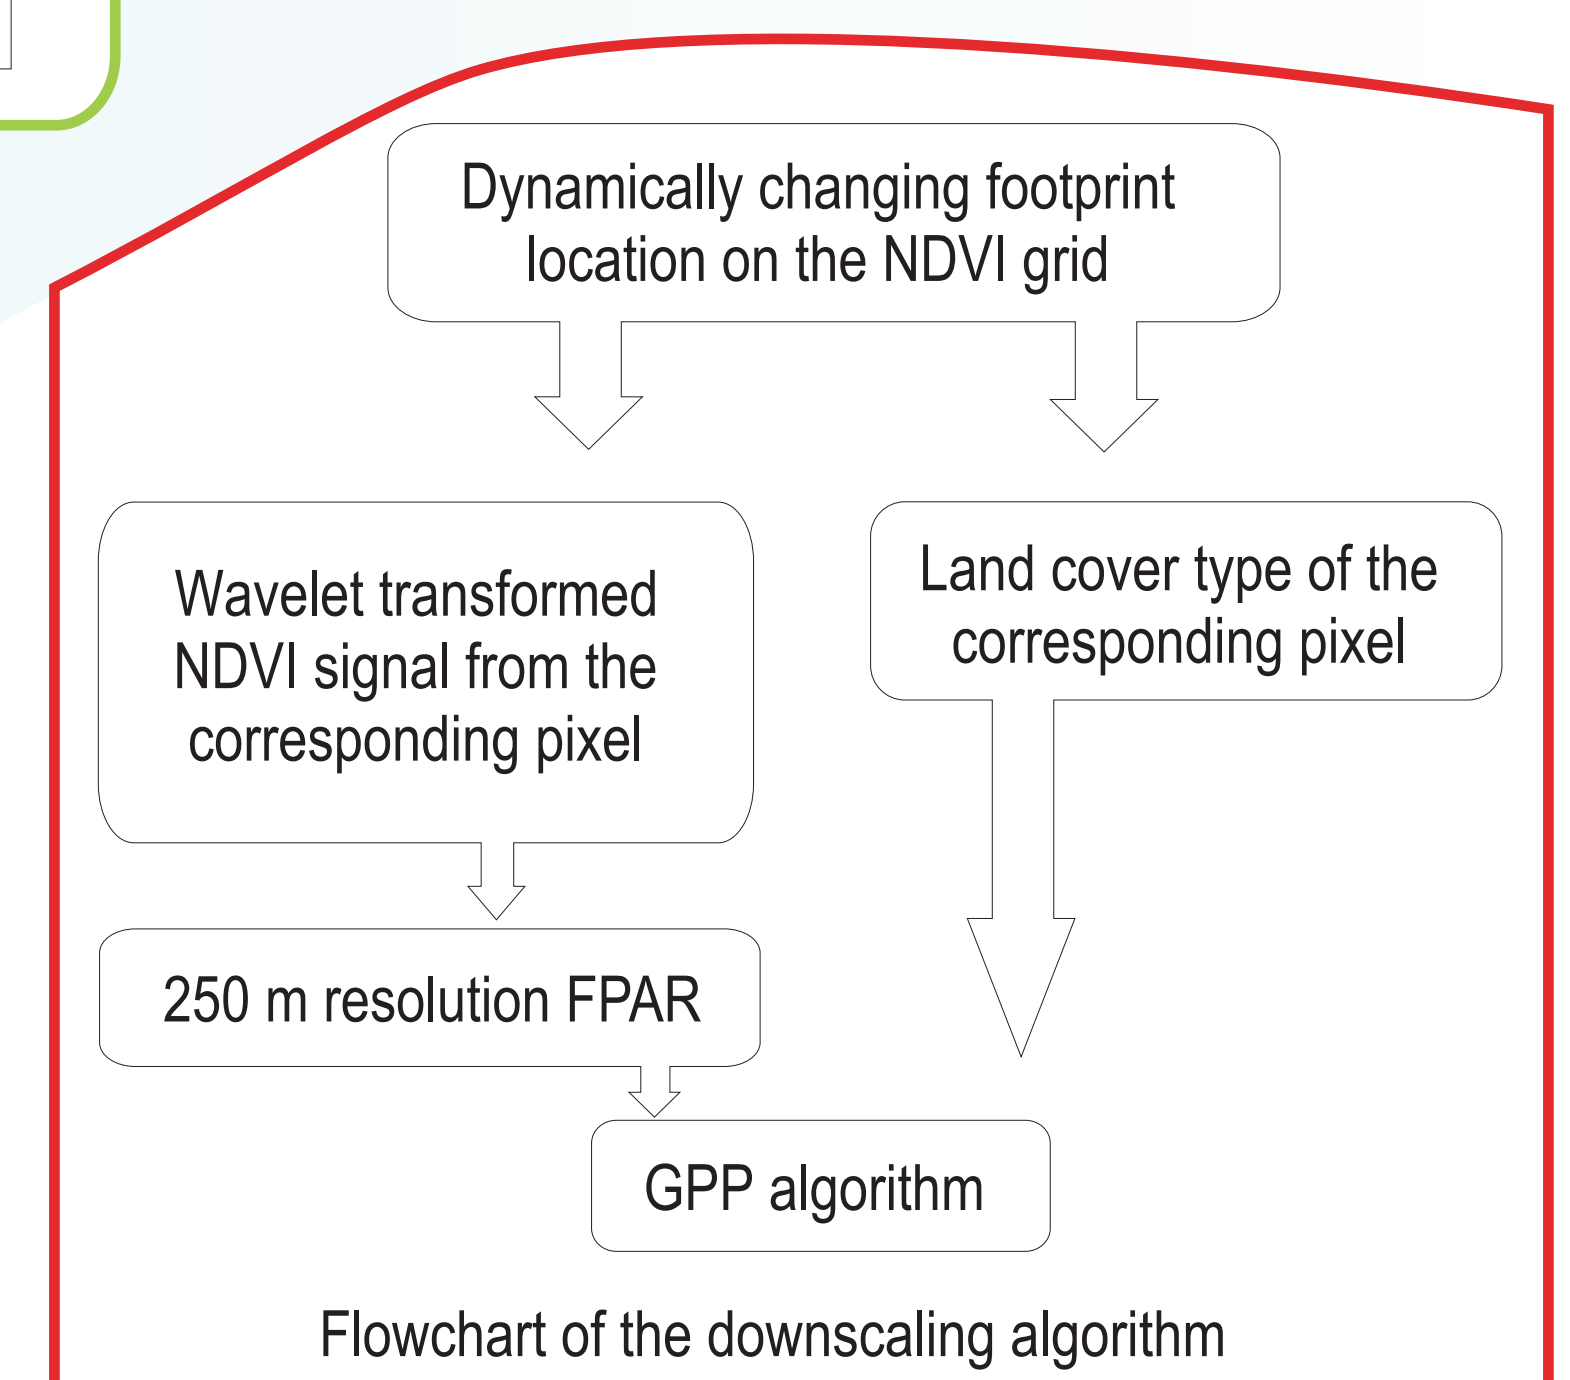

Official MOD17 product:


Light use efficiency (ϵ) based model

- Satellite data input: Land cover (MOD12), FPAR (MOD15)
- Meteorological input: GMAO reanalysis NTSG version 5.1
- Adapted algorithm: FPAR quality control, GPP calculations


References:
 Barcza, Z., Kern, A., Haszpra, L., Kljun, N. (2009). Spatial representativeness of tall tower eddy covariance measurements using remote sensing and footprint analysis. *Agric. Forest Meteorol.*, 149, 795-807.
 Kljun, N., Calanca, P., Rotach, M. W., Schmid, H. P. (2004). A simple parameterisation for flux footprint predictions. *Bound.-Lay. Meteorol.*, 112, 503-523.

Acknowledgements:
 The research has been supported by the Hungarian State Eotvos Fellowship


Results

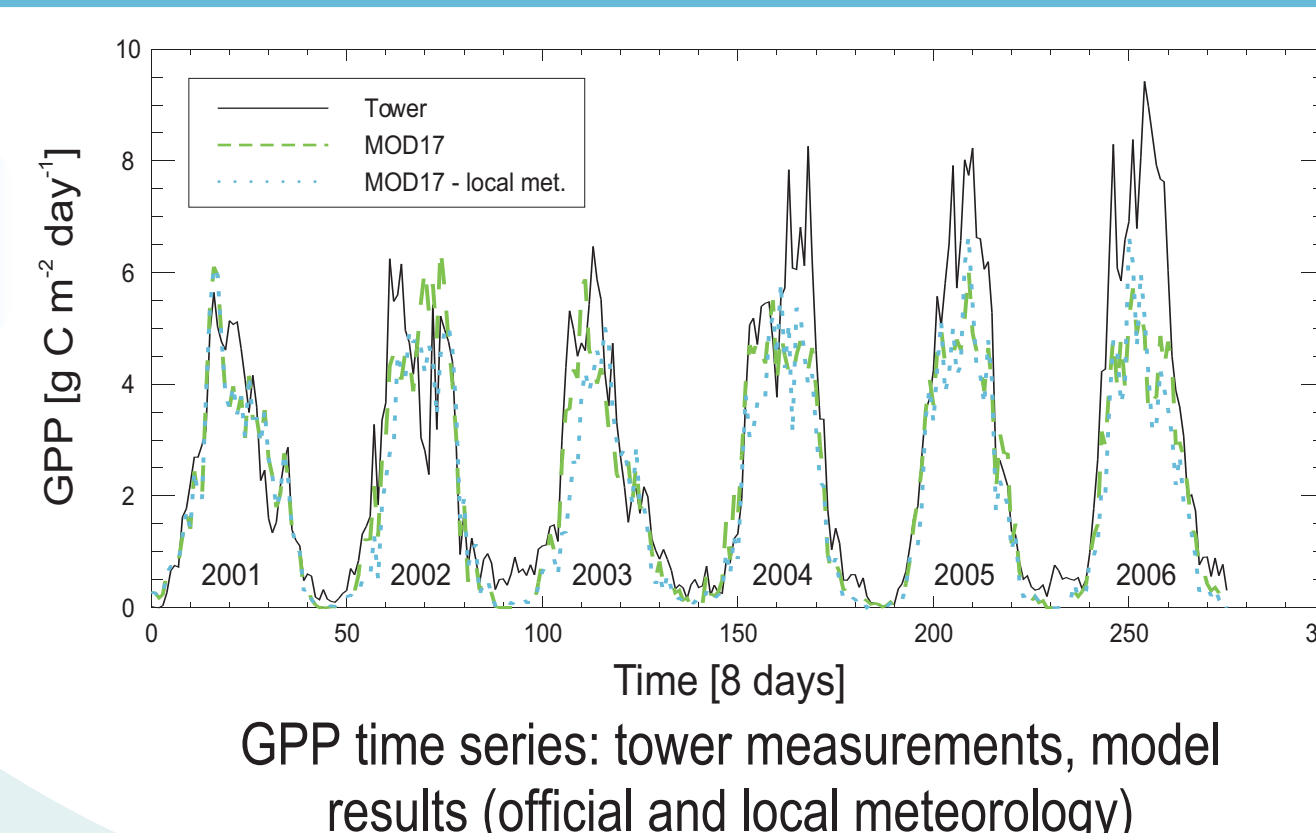

GPP time series: tower measurements, model results (official and local meteorology)

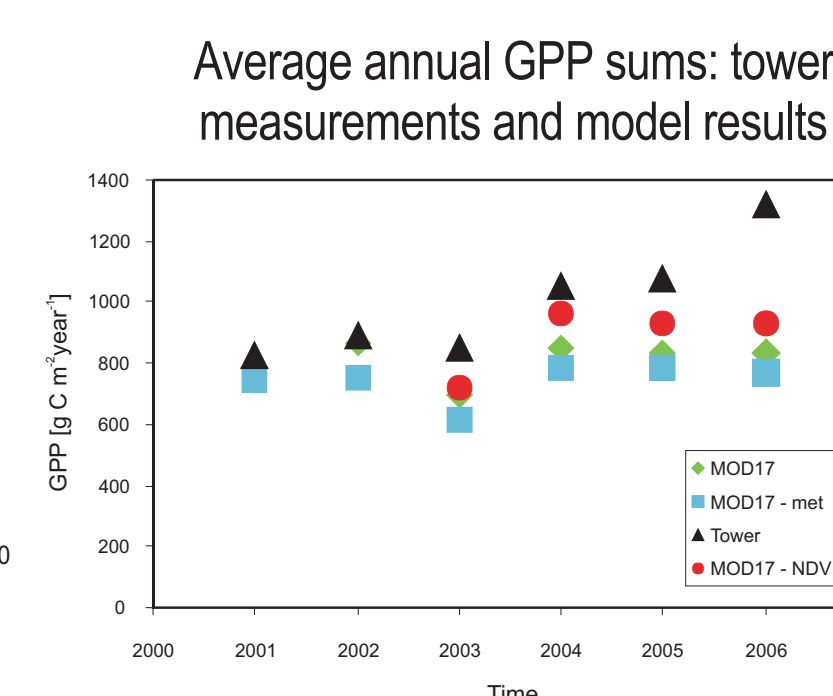

Average annual GPP sums: tower measurements and model results

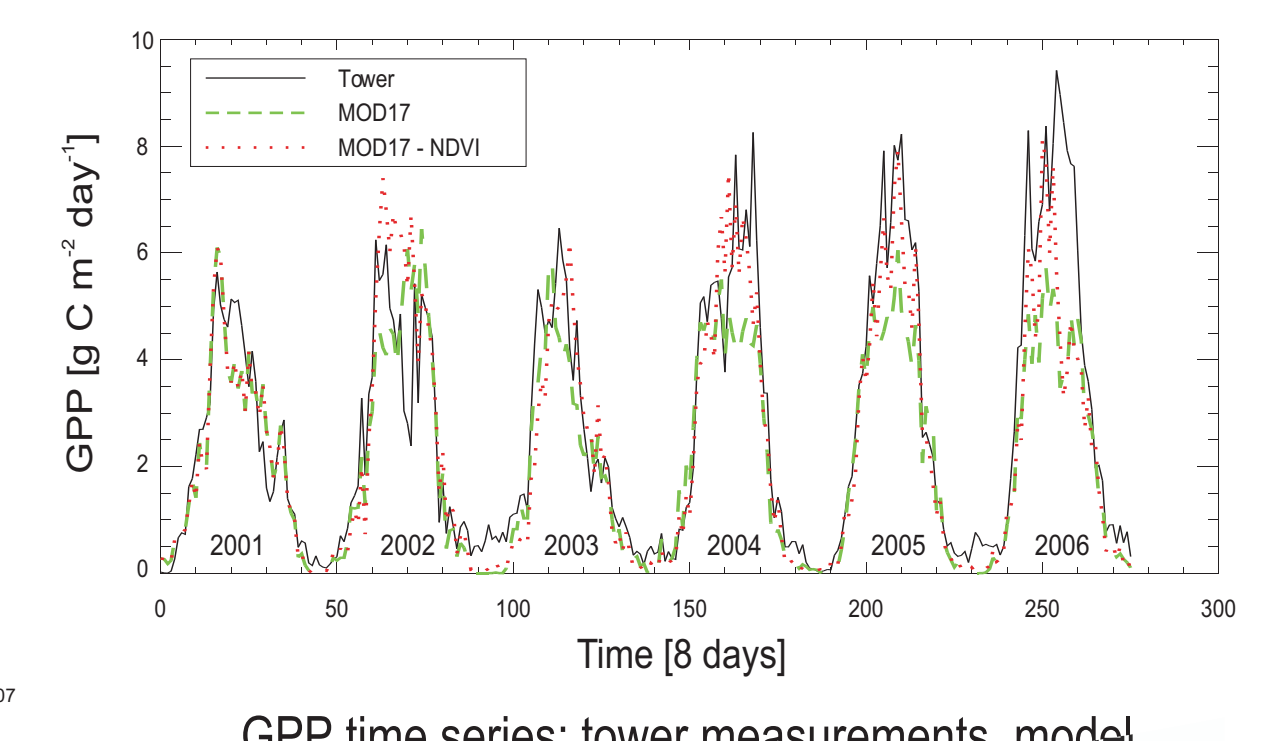

GPP time series: tower measurements, model results (official and downscaled)

Results from the three model setups show that errors in meteorology are not exclusively responsible for occasionally poor model performance. Improvements in model spatial resolution (primarily determined by FPAR resolution) can significantly improve accuracy. After eliminating possible sources of errors in input meteorology and spatial resolution, it is clear that the calibration of the model, even creating new PFTs is the next step toward more accurate results.

International TOVS Study Conference, 17th, ITSC-17, Monterey, CA, 14-20 April 2010.
Madison, WI, University of Wisconsin-Madison, Space Science and Engineering Center,
Cooperative Institute for Meteorological Satellite Studies, 2011.